



**No waste. More labels.  
Less effort.**

**BradyPrinter i3300 Industrial Label Printer**

# No waste. More labels. Less effort.

Picture your ideal label printing scenario – the labels and ribbons snap into place, there's no calibration process and you don't have to throw away blank labels before you actually print one. Ideal is now real with the BradyPrinter i3300 Industrial Label Printer. This mid-volume industrial label printer makes your identification projects easy, fast and affordable. Enjoy a variety of time- and money-saving advantages, including:


- **No waste printing** – with print smart technology, you get auto setup and calibration without throwing out blank labels
- **Fast material changeovers** – foolproof drop-in label rolls and ribbons snap into place for 20-second material changeovers
- **Full-facility identification** – complete all of your identification tasks, from wires, panels and products to safety and facility labels, with one convenient and efficient tool

## The complete BradyPrinter i3300 solution



# BradyPrinter i3300

INDUSTRIAL LABEL PRINTER

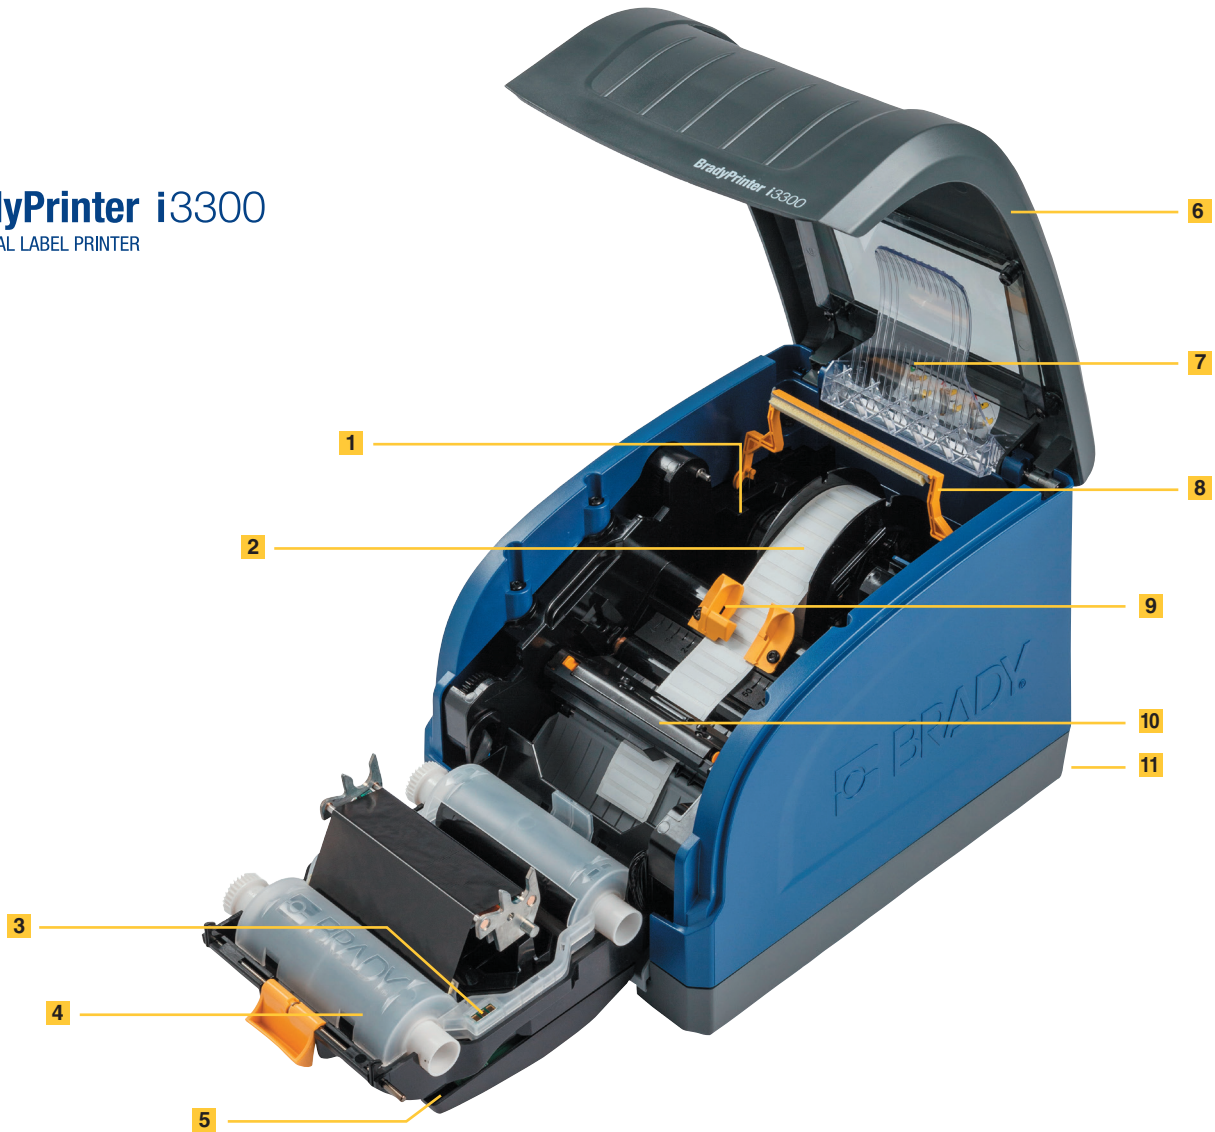

- 1 Media roll cartridge with auto part detection**  
Printer auto-detects installed label part, communicating printer setting and part setup information to both printer and Brady software
- 2 15-second media roll changeover**  
Media cartridge roll drops in and out of place quickly with minimal thread-through, no sensor adjustment, no calibration and no label waste
- 3 Ribbon cartridge with auto part detection**  
Printer auto-detects installed ribbon part, then sets correct print heat level and shows a warning if incorrect ribbon is used
- 4 5-second ribbon changeover**  
Ribbon cartridge snaps into place in one quick motion and guarantees the ink always faces the right direction to the print head
- 5 Color touchscreen control panel**  
Icons and sliders for easy printer setting adjustments and on-display part information and amount remaining

- 6 Top-loading design**  
Reduces footprint in your work area and simplifies media alignment and loading
- 7 Double-sided PermaSleeve® bridge**  
Lowered into place to allow printing second side of double-sided PermaSleeve wire markers
- 8 Media wiper arm**  
Ensures dust-free surface and high print quality when printing large ink areas on continuous media. Felt pads are field-replaceable
- 9 Sensors located in guides**  
Label sensor is always correctly positioned as guides are closed, meaning no sensor location trial and error, no calibration required and no wasted labels
- 10 Integrated auto cutter**  
Built-in cutter for complete cut-through of media between labels, at end of job, or no cut at all
- 11 Interface options**  
2x USB, 1x USB 2.0, 1x Ethernet (back of printer)






Prints on first label

## No wasting labels with print smart technology

Print on every label or sleeve – no more blank first label. With print smart technology, the printer, labels, ribbons and software all work together for efficient label setup. It's all in the smart chip embedded in our materials – it stores the material size, type, color, quantity and compatibility, and sets proper burn settings, sensor alignment and print speed. When installed, the chip sends that information to the printer and desktop software and auto calibrates without wasting any labels – and you get fast material setup and creation, without the waste.

## Get no-hassle, 20-second material changeovers

Forget fumbling around with ribbon rolls that are great at rolling away or threading material around rollers or print heads. Switch to a new way of material changeovers with the BradyPrinter i3300 Industrial Label Printer. The easy-to-load label rolls and self-contained ribbons snap into place for easy 20-second material changeovers without cumbersome sensor adjustments. Switch materials frequently throughout the day? You'll save time to work on your more important tasks.

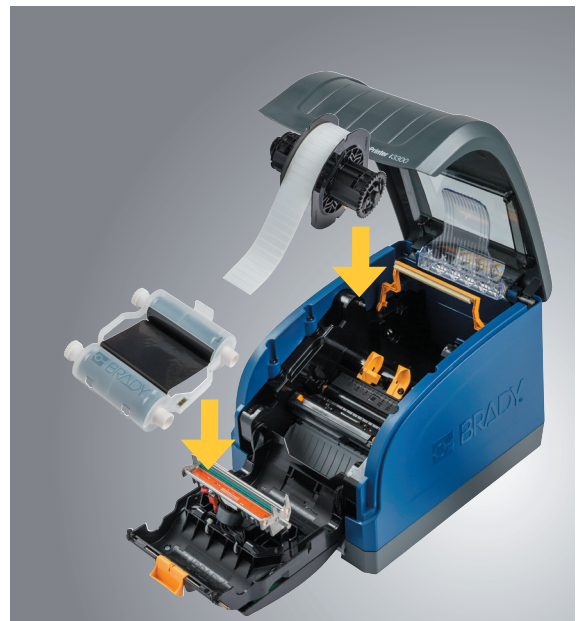

Easy drop-in loading




# The right label from the right company

Nothing leaves Brady's doors without meeting the highest quality standards. Backed by more than 100 years of identification experience and rigorous R&D testing, Brady manufactures materials you can trust.




That strong background of material development allows us to create materials for all of your applications throughout your facility. Add the printing versatility of the BradyPrinter i3300 Industrial Label Printer, and you get a convenient tool for facility-wide identification that offers more than 825 parts and 70 material options, and additional custom label options for a variety of applications, including:

## Product ID and production line applications



- Metallized labels and rating plates
- Work-in-process and barcode labels
- QA testing labels
- Anti-tamper labels
- Product labels

## Electronics and PC board applications



- Polyimide labels
- Electrostatic dissipative labels
- Polyester labels
- Removable polyimide labels
- PC board component labels

## Electrical and automation applications



- Wire markers and sleeves
- Inside panel labels
- Push button / engraved plate alternative labels
- Panel rating plate materials

## Safety, maintenance and facility applications



- Pipe markers
- Safety signs and warnings
- Lean / 5S labels
- Floor marking
- GHS chemical labels

## Laboratory and sample tracking applications



- Cryo tube and vial labels
- Labels for humidity, moisture, water bath and autoclave
- Slide labels / solvent-resistant labels
- Removable labels for glassware

# BradyPrinter i3300 Label Printer and Accessories

## Printer Part Numbers

| Catalog # | Description  |
|-----------|--|
| 150640    | BradyPrinter i3300 with auto cutter, Wi-Fi version. Bundled with Brady Workstation Product and Wire ID Suite label creation software               |
| 150642    | BradyPrinter i3300 with auto cutter, Wi-Fi version. Bundled with Brady Workstation Laboratory ID Suite label creation software                     |
| 150643    | BradyPrinter i3300 with auto cutter, Wi-Fi version. Bundled with Brady Workstation Safety and Facility ID Suite label creation software            |
| 150645    | BradyPrinter i3300 with auto cutter, Wi-Fi version. Bundled with Brady Workstation GHS Label App label creation software                           |
| 150639    | BradyPrinter i3300 with auto cutter, Wi-Fi version. Bundled with Brady Workstation Scan and Print Suite label creation software and CR2600 Scanner |
| 149552    | BradyPrinter i3300 with auto cutter, Wi-Fi version (includes Brady Workstation Basic design suite)   |

See page 38 for descriptions of Brady Workstation suites. Base printer ships with power cord, USB cable, cleaning kit, cutter cleaning tool, Quick Start guide, product CD with full user manual.

Brady WorkStation does not require the use of a driver. A Windows® driver for the BradyPrinter i3300 is available if needed via free download from BradyID.com.



## Accessories

| Catalog # | Description  |
|-----------|--|
| PCK-6     | Cleaning swabs soaked in IPA (pkg. of 50 swabs)              |
| 120994    | Padded rolling case with handle and supplies pockets         |
| B31-WIPER | 5-pack of replaceable media wipers (fits BradyPrinter i3300) |
| B31-CCT   | Cleaning tool for auto cutter blade                          |



Windows® is a registered trademark of Microsoft Corporation.







## Polyester Labels (B-422, B-423, B-430, B-432, B483, B-484A and B-489A)

• For product, circuit board and component ID as well as for general purpose industrial identification

**B-423, B-483, B-489A:** Service temp: -94° to 248° F


Agency approvals:

**B-430, B-432:** Service temp: -40° to 212° F

Agency approvals:

**B-484A:** Service temp: -40° to 248° F

Agency approvals:

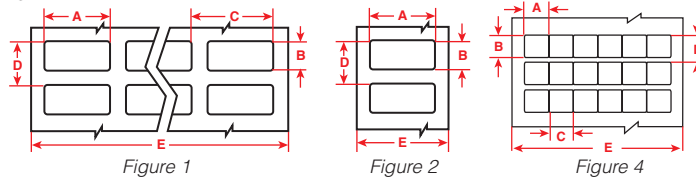

| Diagram   | Catalog #   | B#     | Color       | Label Width A<br>Inch (mm) | Label Height B<br>Inch (mm) | Horiz. Repeat C<br>Inch (mm) | Vert. Repeat D<br>Inch (mm) | Web Width E<br>Inch (mm) | Labels<br>Per Row | Labels<br>Per Roll | Rec. Ribbon |
|---|-------------|--------|-------------|----------------------------|-----------------------------|------------------------------|-----------------------------|--------------------------|-------------------|--------------------|-------------|
| <b>Standard adhesive (B-423):</b>   |             |        |             |                            |                             |                              |                             |                          |                   |                    |             |
| Fig. 4  | B33-11-423  | B-423  | Gloss White | 0.250 (6.4)                | 0.250 (6.4)                 | 0.250 (6.4)                  | 0.375 (9.5)                 | 3.200 (81.3)             | 12                | 15000              | B30-R6000   |
| Fig. 1  | B33-38-423  | B-423  | Gloss White | 0.375 (9.5)                | 0.375 (9.5)                 | 0.438 (11.1)                 | 0.475 (12.1)                | 3.200 (81.3)             | 9                 | 5000               | B30-R6000   |
| Fig. 1  | B33-149-423 | B-423  | Gloss White | 0.500 (12.7)               | 0.500 (12.7)                | 0.600 (15.2)                 | 0.600 (15.2)                | 2.500 (63.5)             | 4                 | 5000               | B30-R6000   |
| Fig. 1  | B33-1-423   | B-423  | Gloss White | 0.750 (19.1)               | 0.250 (6.4)                 | 0.800 (20.3)                 | 0.350 (8.9)                 | 3.350 (85.1)             | 4                 | 5000               | B30-R6000   |
| Fig. 2  | B33-46-423  | B-423  | Gloss White | 0.750 (19.1)               | 0.250 (6.4)                 | -                            | 0.350 (8.9)                 | 0.950 (24.1)             | 1                 | 5000               | B30-R6000   |
| Fig. 2  | B33-49-423  | B-423  | Gloss White | 0.900 (22.9)               | 0.250 (6.4)                 | -                            | 0.350 (8.9)                 | 1.100 (27.9)             | 1                 | 5000               | B30-R6000   |
| Fig. 2  | B33-103-423 | B-423  | Gloss White | 1.000 (25.4)               | 0.250 (6.4)                 | -                            | 0.350 (8.9)                 | 1.200 (30.5)             | 1                 | 5000               | B30-R6000   |
| Fig. 1  | B33-3-423   | B-423  | Gloss White | 1.000 (25.4)               | 0.375 (9.5)                 | 1.075 (27.3)                 | 0.475 (12.1)                | 3.350 (85.1)             | 3                 | 5000               | B30-R6000   |
| Fig. 1  | B33-5-423   | B-423  | Gloss White | 1.000 (25.4)               | 0.500 (12.7)                | 1.075 (27.3)                 | 0.600 (15.2)                | 3.350 (85.1)             | 3                 | 5000               | B30-R6000   |
| Fig. 2  | B33-43-423  | B-423  | Gloss White | 1.250 (31.8)               | 0.250 (6.4)                 | -                            | 0.350 (8.9)                 | 1.450 (36.8)             | 1                 | 5000               | B30-R6000   |
| Fig. 1  | B33-29-423  | B-423  | Gloss White | 1.250 (31.8)               | 0.375 (9.5)                 | 1.300 (33.0)                 | 0.475 (12.1)                | 2.750 (69.9)             | 2                 | 5000               | B30-R6000   |
| Fig. 2  | B33-45-423  | B-423  | Gloss White | 1.500 (38.1)               | 0.250 (6.4)                 | -                            | 0.350 (8.9)                 | 1.700 (43.2)             | 1                 | 5000               | B30-R6000   |
| Fig. 2  | B33-72-423  | B-423  | Gloss White | 1.750 (44.5)               | 0.250 (6.4)                 | -                            | 0.350 (8.9)                 | 1.950 (49.5)             | 1                 | 5000               | B30-R6000   |
| Fig. 2  | B33-53-423  | B-423  | Gloss White | 2.000 (50.8)               | 0.500 (12.7)                | -                            | 0.600 (15.2)                | 2.200 (55.9)             | 1                 | 2500               | B30-R6000   |
| Fig. 2  | B33-17-423  | B-423  | Gloss White | 2.000 (50.8)               | 1.000 (25.4)                | -                            | 1.125 (28.6)                | 2.200 (55.9)             | 1                 | 1500               | B30-R6000   |
| Fig. 2  | B33-18-423  | B-423  | Gloss White | 3.000 (76.2)               | 1.000 (25.4)                | -                            | 1.125 (28.6)                | 3.200 (81.3)             | 1                 | 1500               | B30-R6000   |
| Fig. 2  | B33-19-423  | B-423  | Gloss White | 3.000 (76.2)               | 2.000 (50.8)                | -                            | 2.125 (54.0)                | 3.200 (81.3)             | 1                 | 500                | B30-R6000   |
| Fig. 2  | B33-55-423  | B-423  | Gloss White | 4.000 (101.6)              | 2.000 (50.8)                | -                            | 2.125 (54.0)                | 4.200 (106.7)            | 1                 | 750                | B30-R6000   |
| <b>Standard adhesive (B-430):</b>   |             |        |             |                            |                             |                              |                             |                          |                   |                    |             |
| Fig. 1  | B33-5-430   | B-430  | Clear       | 1.000 (25.4)               | 0.500 (12.7)                | 1.075 (27.3)                 | 0.625 (15.9)                | 3.350 (85.1)             | 3                 | 5000               | B30-R6000   |
| Fig. 2  | B33-17-430  | B-430  | Clear       | 2.000 (50.8)               | 1.000 (25.4)                | -                            | 1.125 (28.6)                | 2.200 (55.9)             | 1                 | 1500               | B30-R6000   |
| Fig. 2  | B33-18-430  | B-430  | Clear       | 3.000 (76.2)               | 1.000 (25.4)                | -                            | 1.125 (28.6)                | 3.200 (81.3)             | 1                 | 1500               | B30-R6000   |
| <b>Stronger adhesive for textured surfaces (B-422):</b>                                   |             |        |             |                            |                             |                              |                             |                          |                   |                    |             |
| Fig. 1  | B33-149-422 | B-422  | Gloss White | 0.500 (12.7)               | 0.500 (12.7)                | 0.600 (15.2)                 | 0.600 (15.2)                | 2.500 (63.5)             | 4                 | 5000               | B30-R6000   |
| Fig. 1  | B33-5-422   | B-422  | Gloss White | 1.000 (25.4)               | 0.500 (12.7)                | 1.075 (27.3)                 | 0.600 (15.2)                | 3.350 (85.1)             | 3                 | 5000               | B30-R6000   |
| Fig. 1  | B33-147-422 | B-422  | Gloss White | 1.500 (38.1)               | 0.375 (9.5)                 | 1.650 (41.9)                 | 0.475 (12.1)                | 3.350 (85.1)             | 2                 | 2500               | B30-R6000   |
| Fig. 2  | B33-102-422 | B-422  | Gloss White | 1.500 (38.1)               | 0.375 (9.5)                 | -                            | 0.500 (12.7)                | 1.700 (43.2)             | 1                 | 2500               | B30-R6000   |
| Fig. 2  | B33-136-422 | B-422  | Gloss White | 1.500 (38.1)               | 0.750 (19.1)                | -                            | 0.875 (22.2)                | 1.700 (43.2)             | 1                 | 1500               | B30-R6000   |
| Fig. 2  | B33-17-422  | B-422  | Gloss White | 2.000 (50.8)               | 1.000 (25.4)                | -                            | 1.125 (28.6)                | 2.200 (55.9)             | 1                 | 1500               | B30-R6000   |
| Fig. 2  | B33-18-422  | B-422  | Gloss White | 3.000 (76.2)               | 1.000 (25.4)                | -                            | 1.125 (28.6)                | 3.200 (81.3)             | 1                 | 1500               | B30-R6000   |
| Fig. 2  | B33-19-422  | B-422  | Gloss White | 3.000 (76.2)               | 2.000 (50.8)                | -                            | 2.125 (54.0)                | 3.200 (81.3)             | 1                 | 500                | B30-R6000   |
| Fig. 2  | B33-76-422  | B-422  | Gloss White | 4.000 (101.6)              | 3.000 (76.2)                | -                            | 3.125 (79.4)                | 4.200 (106.7)            | 1                 | 500                | B30-R6000   |
| <b>Stronger adhesive for textured surfaces (B-432):</b>                                   |             |        |             |                            |                             |                              |                             |                          |                   |                    |             |
| Fig. 1  | B33-149-432 | B-432  | Clear       | 0.500 (12.7)               | 0.500 (12.7)                | 0.600 (15.2)                 | 0.625 (15.9)                | 2.500 (63.5)             | 4                 | 5000               | B30-R6000   |
| Fig. 1  | B33-5-432   | B-432  | Clear       | 1.000 (25.4)               | 0.500 (12.7)                | 1.075 (27.3)                 | 0.600 (15.2)                | 3.350 (85.1)             | 3                 | 5000               | B30-R6000   |
| Fig. 2  | B33-17-432  | B-432  | Clear       | 2.000 (50.8)               | 1.000 (25.4)                | -                            | 1.125 (28.6)                | 2.200 (55.9)             | 1                 | 1500               | B30-R6000   |
| Fig. 2  | B33-18-432  | B-432  | Clear       | 3.000 (76.2)               | 1.000 (25.4)                | -                            | 1.125 (28.6)                | 3.200 (81.3)             | 1                 | 1500               | B30-R6000   |
| Fig. 2  | B33-19-432  | B-432  | Clear       | 3.000 (76.2)               | 2.000 (50.8)                | -                            | 2.125 (54.0)                | 3.200 (81.3)             | 1                 | 500                | B30-R6000   |
| <b>Ultra-aggressive adhesive for highly textured surfaces (B-483):</b>                    |             |        |             |                            |                             |                              |                             |                          |                   |                    |             |
| Fig. 1  | B33-149-483 | B-483  | Gloss White | 0.500 (12.7)               | 0.500 (12.7)                | 0.600 (15.2)                 | 0.600 (15.2)                | 2.500 (63.5)             | 4                 | 5000               | B30-R6000   |
| Fig. 1  | B33-5-483   | B-483  | Gloss White | 1.000 (25.4)               | 0.500 (12.7)                | 1.075 (27.3)                 | 0.600 (15.2)                | 3.350 (85.1)             | 3                 | 5000               | B30-R6000   |
| Fig. 2  | B33-17-483  | B-483  | Gloss White | 2.000 (50.8)               | 1.000 (25.4)                | -                            | 1.125 (28.6)                | 2.200 (55.9)             | 1                 | 1500               | B30-R6000   |
| Fig. 2  | B33-7-483   | B-483  | Gloss White | 2.750 (69.9)               | 1.250 (31.8)                | -                            | 1.375 (34.9)                | 2.950 (74.9)             | 1                 | 1000               | B30-R6000   |
| Fig. 2  | B33-18-483  | B-483  | Gloss White | 3.000 (76.2)               | 1.000 (25.4)                | -                            | 1.125 (28.6)                | 3.200 (81.3)             | 1                 | 1500               | B30-R6000   |
| Fig. 2  | B33-19-483  | B-483  | Gloss White | 3.000 (76.2)               | 2.000 (50.8)                | -                            | 2.125 (54.0)                | 3.200 (81.3)             | 1                 | 500                | B30-R6000   |
| Fig. 2  | B33-55-483  | B-483  | Gloss White | 4.000 (101.6)              | 2.000 (50.8)                | -                            | 2.125 (54.0)                | 4.200 (106.7)            | 1                 | 750                | B30-R6000   |
| <b>Ultra-aggressive adhesive for highly textured surfaces (B-489A):</b>                   |             |        |             |                            |                             |                              |                             |                          |                   |                    |             |
| Fig. 1  | B33-5-489   | B-489A | Matte White | 1.000 (25.4)               | 0.500 (12.7)                | 1.075 (27.3)                 | 0.600 (15.2)                | 3.350 (85.1)             | 3                 | 5000               | B30-R4300   |
| Fig. 2  | B33-17-489  | B-489A | Matte White | 2.000 (50.8)               | 1.000 (25.4)                | -                            | 1.125 (28.6)                | 2.200 (55.9)             | 1                 | 1500               | B30-R4300   |
| Fig. 2  | B33-18-489  | B-489A | Matte White | 3.000 (76.2)               | 1.000 (25.4)                | -                            | 1.125 (28.6)                | 3.200 (81.3)             | 1                 | 1500               | B30-R4300   |
| Fig. 2  | B33-19-489  | B-489A | Matte White | 3.000 (76.2)               | 2.000 (50.8)                | -                            | 2.125 (54.0)                | 3.200 (81.3)             | 1                 | 500                | B30-R4300   |
| <b>Ultra-aggressive adhesive and pliable for conforming to angular surfaces (B-484A):</b> |             |        |             |                            |                             |                              |                             |                          |                   |                    |             |
| Fig. 2  | B33-125-484 | B-484A | Gloss White | 0.900 (22.9)               | 0.500 (12.7)                | -                            | 0.600 (15.2)                | 1.100 (27.9)             | 1                 | 1500               | B30-R6000   |
| Fig. 1  | B33-5-484   | B-484A | Gloss White | 1.000 (25.4)               | 0.500 (12.7)                | 1.075 (27.3)                 | 0.600 (15.2)                | 3.350 (85.1)             | 3                 | 5000               | B30-R6000   |
| Fig. 2  | B33-136-484 | B-484A | Gloss White | 1.500 (38.1)               | 0.750 (19.1)                | -                            | 0.875 (22.2)                | 1.700 (43.2)             | 1                 | 1500               | B30-R6000   |
| Fig. 2  | B33-17-484  | B-484A | Gloss White | 2.000 (50.8)               | 1.000 (25.4)                | -                            | 1.125 (28.6)                | 2.200 (55.9)             | 1                 | 1500               | B30-R6000   |
| Fig. 2  | B33-18-484  | B-484A | Gloss White | 3.000 (76.2)               | 1.000 (25.4)                | -                            | 1.125 (28.6)                | 3.200 (81.3)             | 1                 | 1500               | B30-R6000   |
| Fig. 2  | B33-19-484  | B-484A | Gloss White | 3.000 (76.2)               | 2.000 (50.8)                | -                            | 2.125 (54.0)                | 3.200 (81.3)             | 1                 | 500                | B30-R6000   |




All part numbers above are compatible with BradyPrinter i3300 and BBP®33. Parts may also be compatible with BradyPrinter S3000, BradyPrinter S3100, BBP®30, BBP®31, BBP®35 and BBP®37 printers. Visit BradyID.com to confirm compatibility.

## Metallized Polyester Labels (B-428, B-434, B-435, B-438, B-486B and B-565)

- For product labeling, asset tracking and general industrial ID
- Ideal for serial number plates and rating plates with name-plate quality and metal-looking finish

**B-428:** Service temp: -40° to 293° F  
**B-434:** Service temp: -40° to 194° F  
**B-435:** Service temp: -40° to 194° F  
**B-438:** Service temp: -40° to 104° F  
**B-486B:** Service temp: -40° to 248° F  
**B-565:** Service temp: -40° to 240° F



Agency approvals:     
 Agency approvals:     
 Agency approvals:     
 Agency approvals:     
 Agency approvals:   

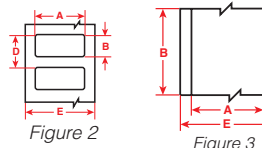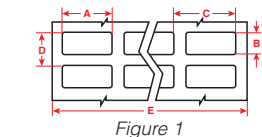

| Diagram   | Catalog #        | B#     | Color        | Label Width A<br>Inch (mm) | Label Height B<br>Inch (mm) | Horiz. Repeat C<br>Inch (mm) | Vert. Repeat D<br>Inch (mm) | Web Width E<br>Inch (mm) | Labels<br>Per Row | Labels<br>Per Roll | Rec.<br>Ribbon |
|---|------------------|--------|--------------|----------------------------|-----------------------------|------------------------------|-----------------------------|--------------------------|-------------------|--------------------|----------------|
| <b>Standard adhesive for smooth surfaces (B-428):</b>   |                  |        |              |                            |                             |                              |                             |                          |                   |                    |                |
| Fig. 1  | B33-5-428        | B-428  | Matte Silver | 1.000 (25.4)               | 0.500 (12.7)                | 1.075 (27.3)                 | 0.600 (15.2)                | 3.350 (85.1)             | 3                 | 5000               | B30-R4300      |
| Fig. 2  | B33-53-428       | B-428  | Matte Silver | 2.000 (50.8)               | 0.500 (12.7)                | -                            | 0.600 (15.2)                | 2.200 (55.9)             | 1                 | 2500               | B30-R4300      |
| Fig. 2  | B33-17-428       | B-428  | Matte Silver | 2.000 (50.8)               | 1.000 (25.4)                | -                            | 1.125 (28.6)                | 2.200 (55.9)             | 1                 | 1500               | B30-R4300      |
| Fig. 2  | B33-18-428       | B-428  | Matte Silver | 3.000 (76.2)               | 1.000 (25.4)                | -                            | 1.125 (28.6)                | 3.200 (81.3)             | 1                 | 1500               | B30-R4300      |
| Fig. 2  | B33-19-428       | B-428  | Matte Silver | 3.000 (76.2)               | 2.000 (50.8)                | -                            | 2.125 (54.0)                | 3.200 (81.3)             | 1                 | 500                | B30-R4300      |
| Fig. 3  | B33C-3000-428    | B-428  | Matte Silver | 3.000 (76.2)               | 85 ft. (25.9m)              | -                            | -                           | 3.400 (86.4)             | 1 roll (cont.)    |                    | B30-R4300      |
| <b>Standard adhesive for smooth surfaces (B-565):</b>   |                  |        |              |                            |                             |                              |                             |                          |                   |                    |                |
| Fig. 3  | B30C-1125-565-SL | B-565  | Matte Silver | 1.125 (28.6)               | 100 ft. (30.5m)             | -                            | -                           | 1.375 (34.9)             | 1 roll (cont.)    |                    | B30-R4300      |
| Fig. 3  | B30C-2250-565-SL | B-565  | Matte Silver | 2.250 (57.5)               | 100 ft. (30.5m)             | -                            | -                           | 2.500 (63.5)             | 1 roll (cont.)    |                    | B30-R4300      |
| Fig. 3  | B30C-4000-565-SL | B-565  | Matte Silver | 4.000 (101.6)              | 100 ft. (30.5m)             | -                            | -                           | 4.200 (106.7)            | 1 roll (cont.)    |                    | B30-R4300      |
| <b>Standard adhesive for smooth surfaces (B-435):</b>   |                  |        |              |                            |                             |                              |                             |                          |                   |                    |                |
| Fig. 2  | B33-18-435       | B-435  | Gloss Silver | 3.000 (76.2)               | 1.000 (25.4)                | -                            | 1.125 (28.6)                | 3.200 (81.3)             | 1                 | 1500               | B30-R6000      |
| Fig. 2  | B33-19-435       | B-435  | Gloss Silver | 3.000 (76.2)               | 2.000 (50.8)                | -                            | 2.125 (54.0)                | 3.200 (81.3)             | 1                 | 500                | B30-R6000      |
| Fig. 2  | B33-55-435       | B-435  | Gloss Silver | 4.000 (101.6)              | 2.000 (50.8)                | -                            | 2.125 (54.0)                | 4.200 (106.7)            | 1                 | 750                | B30-R6000      |
| <b>Stronger adhesive for rougher surfaces (B-434):</b>  |                  |        |              |                            |                             |                              |                             |                          |                   |                    |                |
| Fig. 1  | B33-5-434        | B-434  | Gloss Silver | 1.000 (25.4)               | 0.500 (12.7)                | 1.075 (27.3)                 | 0.600 (15.2)                | 3.350 (85.1)             | 3                 | 5000               | B30-R6000      |
| Fig. 2  | B33-136-434      | B-434  | Gloss Silver | 1.500 (38.1)               | 0.750 (19.1)                | -                            | 0.875 (22.2)                | 1.700 (43.2)             | 1                 | 1500               | B30-R6000      |
| Fig. 2  | B33-17-434       | B-434  | Gloss Silver | 2.000 (50.8)               | 1.000 (25.4)                | -                            | 1.125 (28.6)                | 2.200 (55.9)             | 1                 | 1500               | B30-R6000      |
| Fig. 2  | B33-18-434       | B-434  | Gloss Silver | 3.000 (76.2)               | 1.000 (25.4)                | -                            | 1.125 (28.6)                | 3.200 (81.3)             | 1                 | 1500               | B30-R6000      |
| Fig. 2  | B33-19-434       | B-434  | Gloss Silver | 3.000 (76.2)               | 2.000 (50.8)                | -                            | 2.125 (54.0)                | 3.200 (81.3)             | 1                 | 500                | B30-R6000      |
| Fig. 2  | B33-55-434       | B-434  | Gloss Silver | 4.000 (101.6)              | 2.000 (50.8)                | -                            | 2.125 (54.0)                | 4.200 (106.7)            | 1                 | 750                | B30-R6000      |
| <b>Ultra-aggressive adhesive for highly textured, powder coated and low surface energy surfaces (B-486B):</b> |                  |        |              |                            |                             |                              |                             |                          |                   |                    |                |
| Fig. 2  | B33-59-486       | B-486B | Matte Silver | 1.000 (25.4)               | 0.500 (12.7)                | -                            | 0.600 (15.2)                | 1.200 (30.5)             | 1                 | 2500               | B30-R4300      |
| Fig. 1  | B33-5-486        | B-486B | Matte Silver | 1.000 (25.4)               | 0.500 (12.7)                | 1.075 (27.3)                 | 0.600 (15.2)                | 3.350 (85.1)             | 3                 | 5000               | B30-R4300      |
| Fig. 2  | B33-53-486       | B-486B | Matte Silver | 2.000 (50.8)               | 0.500 (12.7)                | -                            | 0.600 (15.2)                | 2.200 (55.9)             | 1                 | 2500               | B30-R4300      |
| Fig. 2  | B33-17-486       | B-486B | Matte Silver | 2.000 (50.8)               | 1.000 (25.4)                | -                            | 1.125 (28.6)                | 2.200 (55.9)             | 1                 | 1300               | B30-R4300      |
| Fig. 2  | B33-7-486        | B-486B | Matte Silver | 2.750 (69.9)               | 1.250 (31.8)                | -                            | 1.375 (34.9)                | 2.950 (74.9)             | 1                 | 1000               | B30-R4300      |
| Fig. 2  | B33-18-486       | B-486B | Matte Silver | 3.000 (76.2)               | 1.000 (25.4)                | -                            | 1.125 (28.6)                | 3.200 (81.3)             | 1                 | 1300               | B30-R4300      |
| Fig. 2  | B33-19-486       | B-486B | Matte Silver | 3.000 (76.2)               | 2.000 (50.8)                | -                            | 2.125 (54.0)                | 3.200 (81.3)             | 1                 | 500                | B30-R4300      |
| Fig. 2  | B33-76-486       | B-486B | Matte Silver | 4.000 (101.6)              | 3.000 (76.2)                | -                            | 3.125 (79.4)                | 4.200 (106.7)            | 1                 | 500                | B30-R4300      |
| Fig. 2  | B33-161-486      | B-486B | Matte Silver | 4.000 (101.6)              | 4.000 (101.6)               | -                            | 4.125 (104.8)               | 4.200 (106.7)            | 1                 | 250                | B30-R4300      |

## Tamper-Evident Asset ID Labels (B-438)

- Leaves checkerboard footprint on surface and on label if removed to prevent re-use




| Diagram | Catalog #        | B#    | Color        | Label Width A<br>Inch (mm) | Label Height B<br>Inch (mm) | Vert. Repeat D<br>Inch (mm) | Web Width E<br>Inch (mm) | Labels<br>Per Row | Labels<br>Per Roll | Rec. Ribbon |
|---------|------------------|-------|--------------|----------------------------|-----------------------------|-----------------------------|--------------------------|-------------------|--------------------|-------------|
| Fig. 2  | B30-17-438       | B-438 | Matte Silver | 2.000 (50.8)               | 1.000 (25.4)                | 2.500 (63.5)                | 1.125 (28.6)             | 1                 | 1225               | B30-R4300   |
| Fig. 2  | B30-18-438       | B-438 | Matte Silver | 3.000 (76.2)               | 1.000 (25.4)                | 3.250 (82.6)                | 1.250 (31.8)             | 1                 | 1225               | B30-R4300   |
| Fig. 2  | B30-222-438      | B-438 | Matte Silver | 3.000 (76.2)               | 2.000 (50.8)                | 3.250 (82.6)                | 2.250 (57.2)             | 1                 | 650                | B30-R4300   |
| Fig. 3  | B30C-3000-438-SL | B-438 | Matte Silver | 3.000 (76.2)               | 100 ft. (30.5m)             | -                           | 3.250 (82.6)             | 1 roll (cont.)    |                    | B30-R4300   |



All part numbers above are compatible with BradyPrinter i3300 and BBP®33. Parts may also be compatible with BradyPrinter S3000, BradyPrinter S3100, BBP®30, BBP®31, BBP®35 and BBP®37 printers. Visit BradyID.com to confirm compatibility.

## Standard Polyimide Labels (B-724 and B-727)

- Top- or bottom-side component ID or board ID labels that withstand the various processes, fluxes and cleaning solvents encountered in the manufacture of printed circuit boards

**B-727:** Service temp: -94° to 212° F (short burst max temp: 80 sec at 572° F, 5 min at 500° F, 2 hrs at 338° F)  
Agency approvals:  RoHS

**B-724:** Service temp: -94° to 518° F (short burst max temp: 80 sec at 626° F, 5 min at 536° F)  
Agency approvals: RoHS

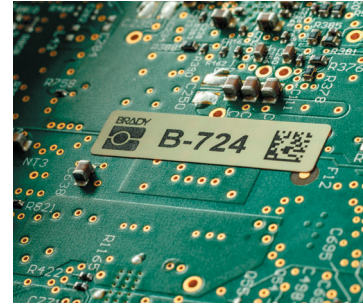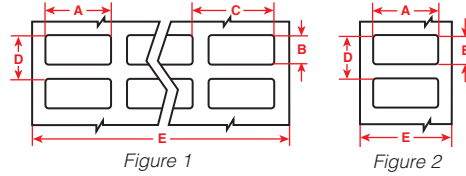


| Diagram                                    | Catalog #   | B#    | Color       | Label Width A<br>Inch (mm) | Label Height B<br>Inch (mm) | Horiz. Repeat C<br>Inch (mm) | Vert. Repeat D<br>Inch (mm) | Web Width E<br>Inch (mm) | Labels<br>Per Row | Labels<br>Per Roll | Rec.<br>Ribbon |
|--|-------------|-------|-------------|----------------------------|-----------------------------|------------------------------|-----------------------------|--------------------------|-------------------|--------------------|----------------|
| <b>Standard temperature (B-727):</b>       |             |       |             |                            |                             |                              |                             |                          |                   |                    |                |
| Fig. 1                                     | B33-11-727  | B-727 | Gloss White | 0.250 (6.35)               | 0.250 (6.4)                 | 0.250 (6.4)                  | 0.375 (9.5)                 | 3.200 (81.3)             | 12                | 5000               | B30-R6000      |
| Fig. 1                                     | B33-38-727  | B-727 | Gloss White | 0.375 (9.5)                | 0.375 (9.5)                 | 0.438 (11.1)                 | 0.475 (12.1)                | 3.200 (81.3)             | 9                 | 5000               | B30-R6000      |
| Fig. 1                                     | B33-149-727 | B-727 | Gloss White | 0.500 (12.7)               | 0.500 (12.7)                | 0.600 (15.2)                 | 0.600 (15.2)                | 2.500 (63.5)             | 4                 | 5000               | B30-R6000      |
| Fig. 1                                     | B33-1-727   | B-727 | Gloss White | 0.750 (19.1)               | 0.250 (6.4)                 | 0.800 (20.3)                 | 0.350 (8.9)                 | 3.350 (85.1)             | 4                 | 5000               | B30-R6000      |
| Fig. 2                                     | B33-49-727  | B-727 | Gloss White | 0.900 (22.9)               | 0.250 (6.4)                 | -                            | 0.350 (8.9)                 | 1.100 (27.9)             | 1                 | 5000               | B30-R6000      |
| Fig. 1                                     | B33-2-727   | B-727 | Gloss White | 0.900 (22.9)               | 0.250 (6.4)                 | 1.125 (28.6)                 | 0.350 (8.9)                 | 3.350 (85.1)             | 3                 | 5000               | B30-R6000      |
| Fig. 2                                     | B33-103-727 | B-727 | Gloss White | 1.000 (25.4)               | 0.250 (6.4)                 | -                            | 0.350 (8.9)                 | 1.200 (30.5)             | 1                 | 5000               | B30-R6000      |
| Fig. 2                                     | B33-58-727  | B-727 | Gloss White | 1.000 (25.4)               | 0.375 (9.5)                 | -                            | 0.475 (12.1)                | 1.200 (30.5)             | 1                 | 4000               | B30-R6000      |
| Fig. 2                                     | B33-59-727  | B-727 | Gloss White | 1.000 (25.4)               | 0.500 (12.7)                | -                            | 0.600 (15.2)                | 1.200 (30.5)             | 1                 | 2500               | B30-R6000      |
| Fig. 2                                     | B33-43-727  | B-727 | Gloss White | 1.250 (31.8)               | 0.250 (6.4)                 | -                            | 0.350 (8.9)                 | 1.450 (36.8)             | 1                 | 5000               | B30-R6000      |
| Fig. 2                                     | B33-44-727  | B-727 | Gloss White | 1.375 (34.9)               | 0.250 (6.4)                 | -                            | 0.350 (8.9)                 | 1.600 (40.6)             | 1                 | 5000               | B30-R6000      |
| Fig. 2                                     | B33-45-727  | B-727 | Gloss White | 1.500 (38.1)               | 0.250 (6.4)                 | -                            | 0.350 (8.9)                 | 1.700 (43.2)             | 1                 | 5000               | B30-R6000      |
| Fig. 2                                     | B33-72-727  | B-727 | Gloss White | 1.750 (44.5)               | 0.250 (6.4)                 | -                            | 0.350 (8.9)                 | 1.950 (49.5)             | 1                 | 5000               | B30-R6000      |
| <b>Extremely high temperature (B-724):</b> |             |       |             |                            |                             |                              |                             |                          |                   |                    |                |
| Fig. 1                                     | B33-149-724 | B-724 | Matte Amber | 0.500 (12.7)               | 0.500 (12.7)                | 0.600 (15.2)                 | 0.600 (15.2)                | 2.500 (63.5)             | 4                 | 5000               | B30-R4300      |
| Fig. 2                                     | B33-46-724  | B-724 | Matte Amber | 0.750 (19.1)               | 0.250 (6.4)                 | -                            | 0.350 (8.9)                 | 0.950 (24.1)             | 1                 | 5000               | B30-R4300      |
| Fig. 1                                     | B33-1-724   | B-724 | Matte Amber | 0.750 (19.1)               | 0.250 (6.4)                 | 0.800 (20.3)                 | 0.350 (8.9)                 | 3.350 (85.1)             | 4                 | 5000               | B30-R4300      |
| Fig. 1                                     | B33-2-724   | B-724 | Matte Amber | 0.900 (22.9)               | 0.250 (6.4)                 | 1.125 (28.6)                 | 0.350 (8.9)                 | 3.350 (85.1)             | 3                 | 5000               | B30-R4300      |
| Fig. 2                                     | B33-43-724  | B-724 | Matte Amber | 1.250 (31.8)               | 0.250 (6.4)                 | -                            | 0.350 (8.9)                 | 1.450 (36.8)             | 1                 | 5000               | B30-R4300      |
| Fig. 1                                     | B33-4-724   | B-724 | Matte Amber | 1.500 (38.1)               | 0.250 (6.4)                 | -                            | 0.350 (8.9)                 | 3.350 (85.1)             | 2                 | 5000               | B30-R4300      |

## Paper Labels (B-424)

- Economical choice for light duty general ID
- White finish and matte topcoat
- Excellent contrast and smear resistance for barcode printing

Service temp: -40° to 124° F Agency approvals: RoHS



| Diagram | Catalog #  | B#    | Color | Label Width A<br>Inch (mm) | Label Height B<br>Inch (mm) | Horiz. Repeat C<br>Inch (mm) | Vert. Repeat D<br>Inch (mm) | Web Width E<br>Inch (mm) | Labels<br>Per Row | Labels<br>Per Roll | Rec. Ribbon |
|---------|------------|-------|-------|----------------------------|-----------------------------|------------------------------|-----------------------------|--------------------------|-------------------|--------------------|-------------|
| Fig. 2  | B33-53-424 | B-424 | White | 2.000 (50.8)               | 0.500 (12.7)                | -                            | 0.600 (15.2)                | 2.200 (55.9)             | 1                 | 2500               | B30-R4300   |
| Fig. 2  | B33-17-424 | B-424 | White | 2.000 (50.8)               | 1.000 (25.4)                | 1.125 (28.6)                 | 2.200 (55.9)                | -                        | 1                 | 1500               | B30-R4300   |
| Fig. 2  | B33-7-424  | B-424 | White | 2.750 (69.9)               | 1.250 (31.8)                | -                            | 1.375 (34.9)                | 2.950 (74.9)             | 1                 | 1000               | B30-R4300   |
| Fig. 2  | B33-18-424 | B-424 | White | 3.000 (76.2)               | 1.000 (25.4)                | 1.125 (28.6)                 | 3.200 (81.3)                | -                        | 1                 | 1500               | B30-R4300   |
| Fig. 2  | B33-19-424 | B-424 | White | 3.000 (76.2)               | 2.000 (50.8)                | 2.125 (54.0)                 | 3.200 (81.3)                | -                        | 1                 | 500                | B30-R4300   |
| Fig. 2  | B33-20-424 | B-424 | White | 3.000 (76.2)               | 5.000 (127)                 | -                            | 5.125 (130.2)               | 3.200 (81.3)             | 1                 | 250                | B30-R4300   |
| Fig. 2  | B33-55-424 | B-424 | White | 4.000 (101.6)              | 2.000 (50.8)                | -                            | 2.125 (54.0)                | 4.200 (106.7)            | 1                 | 750                | B30-R4300   |
| Fig. 2  | B33-25-424 | B-424 | White | 4.000 (101.6)              | 6.000 (152.4)               | 6.125 (155.6)                | 4.200 (106.7)               | -                        | 1                 | 350                | B30-R4300   |



All part numbers above are compatible with BradyPrinter i3300 and BBP®33. Parts may also be compatible with BradyPrinter S3000, BradyPrinter S3100, BBP®30, BBP®31, BBP®35 and BBP®37 printers. Visit BradyID.com to confirm compatibility.




## Static Dissipative Polyimide Labels (B-717, B-718 and B-719)

- Circuit board and electronic component ID with static dissipative adhesive and release liner with surface resistivity values recommended for dissipative ESD packaging
- Complies with EIA-541 packaging material standards for ESD sensitive items
- For top- or bottom-side component or board identification

All: Service temp: -94° to 212° F (short burst max temp:  
80 sec at 572° F, 5 min at 500° F, 2 hrs at 338° F)  
Agency approvals:  

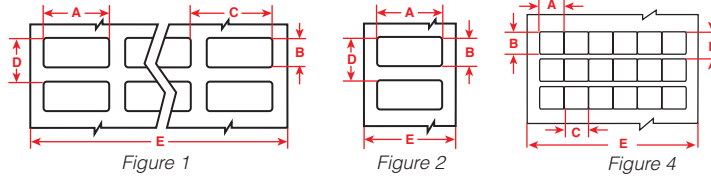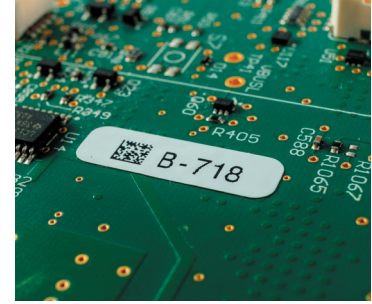





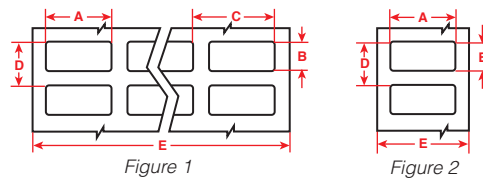
| Diagram   | Catalog #     | B#    | Color       | Label Width A<br>Inch (mm) | Label Height B<br>Inch (mm) | Horiz. Repeat C<br>Inch (mm) | Vert. Repeat D<br>Inch (mm) | Web Width E<br>Inch (mm) | Labels<br>Per Row | Labels<br>Per Roll | Rec.<br>Ribbon |
|---|---------------|-------|-------------|----------------------------|-----------------------------|------------------------------|-----------------------------|--------------------------|-------------------|--------------------|----------------|
| <b>Standard thickness (B-717):</b>                                    |               |       |             |                            |                             |                              |                             |                          |                   |                    |                |
| Fig. 2  | * B33-46-717  | B-717 | Gloss White | 0.750 (19.1)               | 0.250 (6.4)                 | -                            | 0.350 (8.9)                 | 0.950 (24.1)             | 1                 | 5000               | B30-R6000      |
| Fig. 2  | * B33-103-717 | B-717 | Gloss White | 1.000 (25.4)               | 0.250 (6.4)                 | -                            | 0.350 (8.9)                 | 1.200 (30.5)             | 1                 | 5000               | B30-R6000      |
| Fig. 2  | * B33-43-717  | B-717 | Gloss White | 1.250 (31.8)               | 0.250 (6.4)                 | -                            | 0.350 (8.9)                 | 1.450 (36.8)             | 1                 | 5000               | B30-R6000      |
| Fig. 2  | * B33-45-717  | B-717 | Gloss White | 1.500 (38.1)               | 0.250 (6.4)                 | -                            | 0.350 (8.9)                 | 1.700 (43.2)             | 1                 | 5000               | B30-R6000      |
| <b>Low profile label (B-718):</b>                                     |               |       |             |                            |                             |                              |                             |                          |                   |                    |                |
| Fig. 4  | * B33-11-718  | B-718 | Gloss White | 0.250 (6.4)                | 0.250 (6.4)                 | 0.250 (6.4)                  | 0.375 (9.5)                 | 3.200 (81.3)             | 12                | 1500               | B30-R6000      |
| Fig. 1  | * B33-38-718  | B-718 | Gloss White | 0.375 (9.5)                | 0.375 (9.5)                 | 0.438 (11.1)                 | 0.475 (12.1)                | 3.200 (81.3)             | 9                 | 5000               | B30-R6000      |
| Fig. 1  | * B33-149-718 | B-718 | Gloss White | 0.500 (12.7)               | 0.500 (12.7)                | 0.600 (15.2)                 | 0.600 (15.2)                | 2.500 (63.5)             | 4                 | 5000               | B30-R6000      |
| Fig. 1  | * B33-1-718   | B-718 | Gloss White | 0.750 (19.1)               | 0.250 (6.4)                 | 0.800 (20.3)                 | 0.350 (8.9)                 | 3.350 (85.1)             | 4                 | 5000               | B30-R6000      |
| Fig. 2  | * B33-46-718  | B-718 | Gloss White | 0.750 (19.1)               | 0.250 (6.4)                 | -                            | 0.350 (8.9)                 | 0.950 (24.1)             | 1                 | 5000               | B30-R6000      |
| Fig. 2  | * B33-49-718  | B-718 | Gloss White | 0.900 (22.9)               | 0.250 (6.4)                 | -                            | 0.350 (8.9)                 | 1.100 (27.9)             | 1                 | 5000               | B30-R6000      |
| Fig. 2  | * B33-43-718  | B-718 | Gloss White | 1.250 (31.8)               | 0.250 (6.4)                 | -                            | 0.350 (8.9)                 | 1.450 (36.8)             | 1                 | 5000               | B30-R6000      |
| Fig. 2  | * B33-45-718  | B-718 | Gloss White | 1.500 (38.1)               | 0.250 (6.4)                 | -                            | 0.350 (8.9)                 | 1.700 (43.2)             | 1                 | 5000               | B30-R6000      |
| Fig. 2  | * B33-72-718  | B-718 | Gloss White | 1.750 (44.5)               | 0.250 (6.4)                 | -                            | 0.350 (8.9)                 | 1.950 (49.5)             | 1                 | 5000               | B30-R6000      |
| <b>Low profile label to prevent sticking of solder balls (B-719):</b> |               |       |             |                            |                             |                              |                             |                          |                   |                    |                |
| Fig. 1  | * B33-38-719  | B-719 | Matte White | 0.375 (9.5)                | 0.375 (9.5)                 | 0.438 (11.1)                 | 0.475 (12.1)                | 3.200 (81.3)             | 9                 | 5000               | B30-R6000      |
| Fig. 2  | * B33-46-719  | B-719 | Matte White | 0.750 (19.1)               | 0.250 (6.4)                 | -                            | 0.350 (8.9)                 | 0.950 (24.1)             | 1                 | 5000               | B30-R6000      |
| Fig. 1  | * B33-2-719   | B-719 | Matte White | 0.900 (22.9)               | 0.250 (6.4)                 | 1.125 (28.6)                 | 0.350 (8.9)                 | 3.350 (85.1)             | 3                 | 5000               | B30-R6000      |
| Fig. 2  | * B33-43-719  | B-719 | Matte White | 1.250 (31.8)               | 0.250 (6.4)                 | -                            | 0.350 (8.9)                 | 1.450 (36.8)             | 1                 | 5000               | B30-R6000      |

\*  **WARNING:** Cancer [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

## Polypropylene Labels (B-425)

- General labeling material for indoor use
- Outstanding chemical and solvent resistance and print performance
- Not recommended for prolonged outdoor use

Service temp: -94° to 212° F  
Agency approvals:    



| Diagram | Catalog #  | B#    | Color | Label Width A<br>Inch (mm) | Label Height B<br>Inch (mm) | Horiz. Repeat C<br>Inch (mm) | Vert. Repeat D<br>Inch (mm) | Web Width E<br>Inch (mm) | Labels<br>Per Row | Labels<br>Per Roll | Rec. Ribbon |
|---------|------------|-------|-------|----------------------------|-----------------------------|------------------------------|-----------------------------|--------------------------|-------------------|--------------------|-------------|
| Fig. 1  | B33-5-425  | B-425 | White | 1.000 (25.4)               | 0.500 (12.7)                | 1.075 (27.3)                 | 0.600 (15.2)                | 3.350 (85.1)             | 3                 | 5000               | B30-R4300   |
| Fig. 2  | B33-17-425 | B-425 | White | 2.000 (50.8)               | 1.000 (25.4)                | -                            | 1.125 (28.6)                | 2.200 (55.9)             | 1                 | 1500               | B30-R4300   |
| Fig. 2  | B33-18-425 | B-425 | White | 3.000 (76.2)               | 1.000 (25.4)                | -                            | 1.125 (28.6)                | 3.200 (81.3)             | 1                 | 1500               | B30-R4300   |
| Fig. 2  | B33-19-425 | B-425 | White | 3.000 (76.2)               | 2.000 (50.8)                | -                            | 2.125 (54.0)                | 3.200 (81.3)             | 1                 | 500                | B30-R4300   |

All part numbers above are compatible with BradyPrinter i3300 and BBP®33. Parts may also be compatible with BradyPrinter S3000, BradyPrinter S3100, BBP®30, BBP®31, BBP®35 and BBP®37 printers. Visit [BradyID.com](http://BradyID.com) to confirm compatibility.

## Raised Profile Labels – Engraved Plate Substitutes – Push Button Style (B-593)


Costs up to 80% less than engraved legend plates

- High gloss, polyester label with thick raised profile and ultra-aggressive adhesive (0.70 mm thick)
- High-performance, low-cost substitute to engraved plates
- 10-year outdoor durability rating
- 5 push button sizes (including keyed and non-keyed 22.5 mm and 30.5 mm hole dia. keyed)

Service temp: -4° to 212° F Application temp: 50° to 212° F

Average outdoor durability: Up to 10 years

Agency approvals:  RoHS 

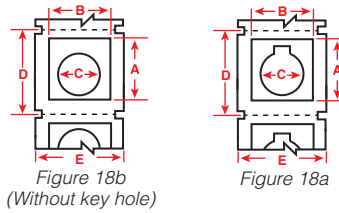

| Diagram  | Catalog #         | B#    | Color  | Label Height A<br>Inch (mm) | Label Width B<br>Inch (mm) | Hole Diameter C<br>Inch (mm) | Vert. Repeat D<br>Inch (mm) | Web Width E<br>Inch (mm) | Labels Per Row | Labels Per Roll | Rec. Ribbon  |
|----------|-------------------|-------|--------|-----------------------------|----------------------------|------------------------------|-----------------------------|--------------------------|----------------|-----------------|--------------|
| Fig. 18a | B30EP-167-593-WT  | B-593 | White  | 1.500 (38.1)                | 1.200 (30.5)               | 0.885 (22.5)                 | 1.750 (44.5)                | 2.500 (63.5)             | 1              | 200             | B30-R6000    |
| Fig. 18b | B30EP-167U-593-WT | B-593 | White  | 1.500 (38.1)                | 1.200 (30.5)               | 0.885 (22.5)                 | 1.750 (44.5)                | 2.500 (63.5)             | 1              | 200             | B30-R6000    |
| Fig. 18a | B30EP-169-593-WT  | B-593 | White  | 1.800 (45.7)                | 1.800 (45.7)               | 1.200 (30.5)                 | 2.000 (50.8)                | 2.500 (63.5)             | 1              | 190             | B30-R6000    |
| Fig. 18a | B30EP-168-593-WT  | B-593 | White  | 1.900 (48.3)                | 1.200 (30.5)               | 0.885 (22.5)                 | 2.125 (54.0)                | 2.500 (63.5)             | 1              | 180             | B30-R6000    |
| Fig. 18a | B30EP-170-593-WT  | B-593 | White  | 2.400 (60.9)                | 2.400 (60.9)               | 1.200 (30.5)                 | 2.625 (66.7)                | 3.250 (82.6)             | 1              | 145             | B30-R6000    |
| Fig. 18a | B30EP-167-593-YL  | B-593 | Yellow | 1.500 (38.1)                | 1.200 (30.5)               | 0.885 (22.5)                 | 1.750 (44.5)                | 2.500 (63.5)             | 1              | 200             | B30-R6000    |
| Fig. 18b | B30EP-167U-593-YL | B-593 | Yellow | 1.500 (38.1)                | 1.200 (30.5)               | 0.885 (22.5)                 | 1.750 (44.5)                | 2.500 (63.5)             | 1              | 200             | B30-R6000    |
| Fig. 18a | B30EP-169-593-YL  | B-593 | Yellow | 1.800 (45.7)                | 1.800 (45.7)               | 1.200 (30.5)                 | 2.000 (50.8)                | 2.500 (63.5)             | 1              | 190             | B30-R6000    |
| Fig. 18a | B30EP-168-593-YL  | B-593 | Yellow | 1.900 (48.3)                | 1.200 (30.5)               | 0.885 (22.5)                 | 2.125 (54.0)                | 2.500 (63.5)             | 1              | 180             | B30-R6000    |
| Fig. 18a | B30EP-170-593-YL  | B-593 | Yellow | 2.400 (60.9)                | 2.400 (60.9)               | 1.200 (30.5)                 | 2.625 (66.7)                | 3.250 (82.6)             | 1              | 145             | B30-R6000    |
| Fig. 18a | B30EP-167-593-BK  | B-593 | Black  | 1.500 (38.1)                | 1.200 (30.5)               | 0.885 (22.5)                 | 1.750 (44.5)                | 2.500 (63.5)             | 1              | 200             | B30-R4400-WT |
| Fig. 18b | B30EP-167U-593-BK | B-593 | Black  | 1.500 (38.1)                | 1.200 (30.5)               | 0.885 (22.5)                 | 1.750 (44.5)                | 2.500 (63.5)             | 1              | 200             | B30-R4400-WT |
| Fig. 18a | B30EP-169-593-BK  | B-593 | Black  | 1.800 (45.7)                | 1.800 (45.7)               | 1.200 (30.5)                 | 2.000 (50.8)                | 2.500 (63.5)             | 1              | 190             | B30-R4400-WT |
| Fig. 18a | B30EP-168-593-BK  | B-593 | Black  | 1.900 (48.3)                | 1.200 (30.5)               | 0.885 (22.5)                 | 2.125 (54.0)                | 2.500 (63.5)             | 1              | 180             | B30-R4400-WT |
| Fig. 18a | B30EP-170-593-BK  | B-593 | Black  | 2.400 (60.9)                | 2.400 (60.9)               | 1.200 (30.5)                 | 2.625 (66.7)                | 3.250 (82.6)             | 1              | 145             | B30-R4400-WT |
| Fig. 18a | B30EP-167-593-GN  | B-593 | Green  | 1.500 (38.1)                | 1.200 (30.5)               | 0.885 (22.5)                 | 1.750 (44.5)                | 2.500 (63.5)             | 1              | 200             | B30-R4400-WT |
| Fig. 18b | B30EP-167U-593-GN | B-593 | Green  | 1.500 (38.1)                | 1.200 (30.5)               | 0.885 (22.5)                 | 1.750 (44.5)                | 2.500 (63.5)             | 1              | 200             | B30-R4400-WT |
| Fig. 18a | B30EP-169-593-GN  | B-593 | Green  | 1.800 (45.7)                | 1.800 (45.7)               | 1.200 (30.5)                 | 2.000 (50.8)                | 2.500 (63.5)             | 1              | 190             | B30-R4400-WT |
| Fig. 18a | B30EP-168-593-GN  | B-593 | Green  | 1.900 (48.3)                | 1.200 (30.5)               | 0.885 (22.5)                 | 2.125 (54.0)                | 2.500 (63.5)             | 1              | 180             | B30-R4400-WT |
| Fig. 18a | B30EP-170-593-GN  | B-593 | Green  | 2.400 (60.9)                | 2.400 (60.9)               | 1.200 (30.5)                 | 2.625 (66.7)                | 3.250 (82.6)             | 1              | 145             | B30-R4400-WT |
| Fig. 18a | B30EP-167-593-RD  | B-593 | Red    | 1.500 (38.1)                | 1.200 (30.5)               | 0.885 (22.5)                 | 1.750 (44.5)                | 2.500 (63.5)             | 1              | 200             | B30-R4400-WT |
| Fig. 18b | B30EP-167U-593-RD | B-593 | Red    | 1.500 (38.1)                | 1.200 (30.5)               | 0.885 (22.5)                 | 1.750 (44.5)                | 2.500 (63.5)             | 1              | 200             | B30-R4400-WT |
| Fig. 18a | B30EP-169-593-RD  | B-593 | Red    | 1.800 (45.7)                | 1.800 (45.7)               | 1.200 (30.5)                 | 2.000 (50.8)                | 2.500 (63.5)             | 1              | 190             | B30-R4400-WT |
| Fig. 18a | B30EP-168-593-RD  | B-593 | Red    | 1.900 (48.3)                | 1.200 (30.5)               | 0.885 (22.5)                 | 2.125 (54.0)                | 2.500 (63.5)             | 1              | 180             | B30-R4400-WT |
| Fig. 18a | B30EP-170-593-RD  | B-593 | Red    | 2.400 (60.9)                | 2.400 (60.9)               | 1.200 (30.5)                 | 2.625 (66.7)                | 3.250 (82.6)             | 1              | 145             | B30-R4400-WT |

U.S. Patent Nos. US8475914B2; US9005729B2.

All part numbers above are compatible with BradyPrinter i3300 and BBP®33. Parts may also be compatible with BradyPrinter S3000, BradyPrinter S3100, BBP®30, BBP®31, BBP®35 and BBP®37 printers. Visit BradyID.com to confirm compatibility.

## Raised Profile Labels – Engraved Plate Substitutes – Rectangular Style (B-593)

Costs up to 80% less than engraved legend plates

- High gloss, polyester label with thick raised profile and ultra-aggressive adhesive (0.70 mm thick)
- Ideal for inside-panel backer board labels and front-of-enclosure labeling
- Costs up to 80% less than engraved plates and prints out in about 4 seconds
- 10-year outdoor durability rating





Figure 18c

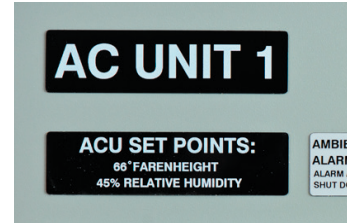

Service temp: -4° to 212° F Application temp: 50° to 212° F  
Average outdoor durability: Up to 10 years  
Agency approvals:

| Diagram  | Catalog #        | B#    | Color  | Label Height A<br>Inch (mm) | Label Width B<br>Inch (mm) | Vert. Repeat D<br>Inch (mm) | Web Width E<br>Inch (mm) | Labels Per Row | Labels Per Roll | Rec. Ribbon  |
|----------|------------------|-------|--------|-----------------------------|----------------------------|-----------------------------|--------------------------|----------------|-----------------|--------------|
| Fig. 18c | B30EP-171-593-WT | B-593 | White  | 0.490 (12.5)                | 1.060 (26.9)               | 0.750 (19.1)                | 1.375 (34.9)             | 1              | 500             | B30-R6000    |
| Fig. 18c | B30EP-172-593-WT | B-593 | White  | 0.590 (15.0)                | 1.770 (45.0)               | 0.850 (21.6)                | 2.500 (63.5)             | 1              | 450             | B30-R6000    |
| Fig. 18c | B30EP-175-593-WT | B-593 | White  | 0.750 (19.1)                | 3.000 (76.2)               | 1.000 (25.4)                | 3.250 (82.6)             | 1              | 375             | B30-R6000    |
| Fig. 18c | B30EP-173-593-WT | B-593 | White  | 1.000 (25.4)                | 2.000 (50.8)               | 1.250 (31.8)                | 2.500 (63.5)             | 1              | 300             | B30-R6000    |
| Fig. 18c | B30EP-174-593-WT | B-593 | White  | 1.000 (25.4)                | 4.000 (101.6)              | 1.250 (31.8)                | 4.250 (108.0)            | 1              | 300             | B30-R6000    |
| Fig. 18c | B30EP-176-593-WT | B-593 | White  | 1.000 (25.4)                | 3.000 (76.2)               | 1.250 (31.8)                | 3.250 (82.6)             | 1              | 300             | B30-R6000    |
| Fig. 18c | B30EP-177-593-WT | B-593 | White  | 2.500 (63.5)                | 3.000 (76.2)               | 2.750 (69.9)                | 3.250 (82.6)             | 1              | 125             | B30-R6000    |
| Fig. 18c | B30EP-171-593-YL | B-593 | Yellow | 0.490 (12.5)                | 1.060 (26.9)               | 0.750 (19.1)                | 1.375 (34.9)             | 1              | 500             | B30-R6000    |
| Fig. 18c | B30EP-172-593-YL | B-593 | Yellow | 0.590 (15.0)                | 1.770 (45.0)               | 0.850 (21.6)                | 2.500 (63.5)             | 1              | 450             | B30-R6000    |
| Fig. 18c | B30EP-175-593-YL | B-593 | Yellow | 0.750 (19.1)                | 3.000 (76.2)               | 1.000 (25.4)                | 3.250 (82.6)             | 1              | 375             | B30-R6000    |
| Fig. 18c | B30EP-173-593-YL | B-593 | Yellow | 1.000 (25.4)                | 2.000 (50.8)               | 1.250 (31.8)                | 2.500 (63.5)             | 1              | 300             | B30-R6000    |
| Fig. 18c | B30EP-174-593-YL | B-593 | Yellow | 1.000 (25.4)                | 4.000 (101.6)              | 1.250 (31.8)                | 4.250 (108.0)            | 1              | 300             | B30-R6000    |
| Fig. 18c | B30EP-176-593-YL | B-593 | Yellow | 1.000 (25.4)                | 3.000 (76.2)               | 1.250 (31.8)                | 3.250 (82.6)             | 1              | 300             | B30-R6000    |
| Fig. 18c | B30EP-177-593-YL | B-593 | Yellow | 2.500 (63.5)                | 3.000 (76.2)               | 2.750 (69.9)                | 3.250 (82.6)             | 1              | 125             | B30-R6000    |
| Fig. 18c | B30EP-171-593-BK | B-593 | Black  | 0.490 (12.5)                | 1.060 (26.9)               | 0.750 (19.1)                | 1.375 (34.9)             | 1              | 500             | B30-R4400-WT |
| Fig. 18c | B30EP-172-593-BK | B-593 | Black  | 0.590 (15.0)                | 1.770 (45.0)               | 0.850 (21.6)                | 2.500 (63.5)             | 1              | 450             | B30-R4400-WT |
| Fig. 18c | B30EP-175-593-BK | B-593 | Black  | 0.750 (19.1)                | 3.000 (76.2)               | 1.000 (25.4)                | 3.250 (82.6)             | 1              | 375             | B30-R4400-WT |
| Fig. 18c | B30EP-173-593-BK | B-593 | Black  | 1.000 (25.4)                | 2.000 (50.8)               | 1.250 (31.8)                | 2.500 (63.5)             | 1              | 300             | B30-R4400-WT |
| Fig. 18c | B30EP-174-593-BK | B-593 | Black  | 1.000 (25.4)                | 4.000 (101.6)              | 1.250 (31.8)                | 4.250 (108.0)            | 1              | 300             | B30-R4400-WT |
| Fig. 18c | B30EP-176-593-BK | B-593 | Black  | 1.000 (25.4)                | 3.000 (76.2)               | 1.250 (31.8)                | 3.250 (82.6)             | 1              | 300             | B30-R4400-WT |
| Fig. 18c | B30EP-177-593-BK | B-593 | Black  | 2.500 (63.5)                | 3.000 (76.2)               | 2.750 (69.9)                | 3.250 (82.6)             | 1              | 125             | B30-R4400-WT |
| Fig. 18c | B30EP-171-593-GN | B-593 | Green  | 0.490 (12.5)                | 1.060 (26.9)               | 0.750 (19.1)                | 1.375 (34.9)             | 1              | 500             | B30-R4400-WT |
| Fig. 18c | B30EP-172-593-GN | B-593 | Green  | 0.590 (15.0)                | 1.770 (45.0)               | 0.850 (21.6)                | 2.500 (63.5)             | 1              | 450             | B30-R4400-WT |
| Fig. 18c | B30EP-175-593-GN | B-593 | Green  | 0.750 (19.1)                | 3.000 (76.2)               | 1.000 (25.4)                | 3.250 (82.6)             | 1              | 375             | B30-R4400-WT |
| Fig. 18c | B30EP-173-593-GN | B-593 | Green  | 1.000 (25.4)                | 2.000 (50.8)               | 1.250 (31.8)                | 2.500 (63.5)             | 1              | 300             | B30-R4400-WT |
| Fig. 18c | B30EP-174-593-GN | B-593 | Green  | 1.000 (25.4)                | 4.000 (101.6)              | 1.250 (31.8)                | 4.250 (108.0)            | 1              | 300             | B30-R4400-WT |
| Fig. 18c | B30EP-176-593-GN | B-593 | Green  | 1.000 (25.4)                | 3.000 (76.2)               | 1.250 (31.8)                | 3.250 (82.6)             | 1              | 300             | B30-R4400-WT |
| Fig. 18c | B30EP-177-593-GN | B-593 | Green  | 2.500 (63.5)                | 3.000 (76.2)               | 2.750 (69.9)                | 3.250 (82.6)             | 1              | 125             | B30-R4400-WT |
| Fig. 18c | B30EP-171-593-RD | B-593 | Red    | 0.490 (12.5)                | 1.060 (26.9)               | 0.750 (19.1)                | 1.375 (34.9)             | 1              | 500             | B30-R4400-WT |
| Fig. 18c | B30EP-172-593-RD | B-593 | Red    | 0.590 (15.0)                | 1.770 (45.0)               | 0.850 (21.6)                | 2.500 (63.5)             | 1              | 450             | B30-R4400-WT |
| Fig. 18c | B30EP-173-593-RD | B-593 | Red    | 1.000 (25.4)                | 2.000 (50.8)               | 1.250 (31.8)                | 2.500 (63.5)             | 1              | 300             | B30-R4400-WT |
| Fig. 18c | B30EP-174-593-RD | B-593 | Red    | 1.000 (25.4)                | 4.000 (101.6)              | 1.250 (31.8)                | 4.250 (108.0)            | 1              | 300             | B30-R4400-WT |
| Fig. 18c | B30EP-171-593-SL | B-593 | Silver | 0.490 (12.5)                | 1.060 (26.9)               | 0.750 (19.1)                | 1.375 (34.9)             | 1              | 500             | B30-R6000    |
| Fig. 18c | B30EP-172-593-SL | B-593 | Silver | 0.590 (15.0)                | 1.770 (45.0)               | 0.850 (21.6)                | 2.500 (63.5)             | 1              | 450             | B30-R6000    |
| Fig. 18c | B30EP-173-593-SL | B-593 | Silver | 1.000 (25.4)                | 2.000 (50.8)               | 1.250 (31.8)                | 2.500 (63.5)             | 1              | 300             | B30-R6000    |
| Fig. 18c | B30EP-174-593-SL | B-593 | Silver | 1.000 (25.4)                | 4.000 (101.6)              | 1.250 (31.8)                | 4.250 (108.0)            | 1              | 300             | B30-R6000    |

U.S. Patent Nos. US8475914B2; US9005729B2.

All part numbers above are compatible with BradyPrinter i3300 and BBP®33. Parts may also be compatible with BradyPrinter S3000, BradyPrinter S3100, BBP®30, BBP®31, BBP®35 and BBP®37 printers. Visit BradyID.com to confirm compatibility.



## Panel ID Labels (B-483, B-484A, B-499, B-593 and B-595)

- Various sizes in several durable material types
- Also ideal for marking backer board, DIN rail, relays, PLCs, switches, solenoids, drive motors and other components inside panels
- All recommended materials are flexible and have high-tack adhesives for adhesion to wide variety of surfaces and components

**B-483:** Service temp: -40° to 248° F Agency approvals:

**B-484A:** Service temp: -40° to 240° F Agency approvals:

**B-499:** Service temp: -40° to 193° F Agency approvals:

**B-593:** Service temp: -4° to 212° F Agency approvals:

**B-595:** Service temp: -40° to 180° F, 8-10 years average outdoor durability Agency approvals:

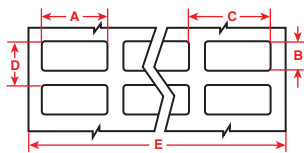


Figure 1




Figure 2




Figure 3




Figure 18c






Figure 70

| Diagram   | Catalog #          | B#     | Color | Label Width A Inch (mm) | Label Height B Inch (mm) | Horiz. Repeat C Inch (mm) | Vert. Repeat D Inch (mm) | Web Width E Inch (mm) | Labels Per Row | Labels Per Roll | Rec. Ribbon |
|---|--------------------|--------|-------|-------------------------|--------------------------|---------------------------|--------------------------|-----------------------|----------------|-----------------|-------------|
| <b>Nylon Cloth - Permanent adhesive (B-499):</b>  |                    |        |       |                         |                          |                           |                          |                       |                |                 |             |
| Fig. 1  | B33-68-499         | B-499  | White | 0.500 (12.7)            | 0.750 (19.1)             | 0.600 (15.2)              | 0.875 (22.2)             | 2.500 (63.5)          | 4              | 1500            | B30-R6000   |
| Fig. 1  | B33-165-499        | B-499  | White | 0.800 (20.3)            | 1.437 (36.5)             | 0.900 (22.9)              | 1.562 (39.7)             | 3.700 (94.0)          | 4              | 2500            | B30-R6000   |
| Fig. 2  | B33-125-499        | B-499  | White | 0.900 (22.9)            | 0.500 (12.7)             | -                         | -                        | -                     | 1              | 1500            | B30-R6000   |
| Fig. 1  | B33-126-499        | B-499  | White | 0.900 (22.9)            | 0.500 (12.7)             | -                         | -                        | -                     | 2              | 1500            | B30-R6000   |
| Fig. 2  | B33-163-499        | B-499  | White | 1.000 (25.4)            | 0.375 (9.5)              | -                         | -                        | -                     | 1              | 1500            | B30-R6000   |
| Fig. 1  | B33-152-499        | B-499  | White | 1.000 (25.4)            | 0.375 (9.5)              | -                         | -                        | -                     | 2              | 1500            | B30-R6000   |
| Fig. 2  | B33-136-499        | B-499  | White | 1.500 (38.1)            | 0.750 (19.1)             | -                         | 0.875 (22.2)             | 1.770 (45.0)          | 1              | 1500            | B30-R6000   |
| Fig. 2  | B33-137-499        | B-499  | White | 2.000 (50.8)            | 1.000 (25.4)             | -                         | 1.125 (28.6)             | 2.200 (55.9)          | 1              | 1100            | B30-R6000   |
| Fig. 2  | B33-125-499        | B-499  | White | 2.000 (50.8)            | 0.250 (6.4)              | -                         | -                        | -                     | 1              | 1500            | B30-R6000   |
| <b>Polyester - Ultra-aggressive adhesive for highly textured and low surface energy surfaces (B-483):</b> |                    |        |       |                         |                          |                           |                          |                       |                |                 |             |
| Fig. 1  | B33-149-483        | B-483  | White | 0.500 (12.7)            | 0.500 (12.7)             | 0.600 (15.2)              | 0.600 (15.2)             | 2.500 (63.5)          | 4              | 5000            | B30-R6000   |
| Fig. 1  | B33-5-483          | B-483  | White | 1.000 (25.4)            | 0.500 (12.7)             | 1.075 (27.3)              | 0.600 (15.2)             | 3.350 (85.1)          | 3              | 5000            | B30-R6000   |
| Fig. 2  | B33-17-483         | B-483  | White | 2.000 (50.8)            | 1.000 (25.4)             | -                         | 1.125 (28.6)             | 2.200 (55.9)          | 1              | 1500            | B30-R6000   |
| Fig. 2  | B33-7-483          | B-483  | White | 2.750 (69.9)            | 1.250 (31.8)             | -                         | 1.375 (34.9)             | 2.950 (74.9)          | 1              | 1000            | B30-R6000   |
| Fig. 2  | B33-18-483         | B-483  | White | 3.000 (76.2)            | 1.000 (25.4)             | -                         | 1.125 (28.6)             | 3.200 (81.3)          | 1              | 1500            | B30-R6000   |
| Fig. 2  | B33-19-483         | B-483  | White | 3.000 (76.2)            | 2.000 (50.8)             | -                         | 2.125 (54.0)             | 3.200 (81.3)          | 1              | 500             | B30-R6000   |
| Fig. 2  | B33-55-483         | B-483  | White | 4.000 (101.6)           | 2.000 (50.8)             | -                         | 2.125 (54.0)             | 4.200 (106.7)         | 1              | 750             | B30-R6000   |
| <b>Polyester - Ultra-aggressive adhesive and pliable for conforming to angular surfaces (B-484A):</b>     |                    |        |       |                         |                          |                           |                          |                       |                |                 |             |
| Fig. 2  | B33-125-484        | B-484A | White | 0.900 (22.9)            | 0.500 (12.7)             | -                         | 0.600 (15.2)             | 1.100 (27.9)          | 1              | 1500            | B30-R6000   |
| Fig. 1  | B33-5-484          | B-484A | White | 1.000 (25.4)            | 0.500 (12.7)             | 1.075 (27.3)              | 0.600 (15.2)             | 3.350 (85.1)          | 3              | 5000            | B30-R6000   |
| Fig. 2  | B33-136-484        | B-484A | White | 1.500 (38.1)            | 0.750 (19.1)             | -                         | 0.875 (22.2)             | 1.700 (43.2)          | 1              | 1500            | B30-R6000   |
| Fig. 2  | B33-17-484         | B-484A | White | 2.000 (50.8)            | 1.000 (25.4)             | -                         | 1.125 (28.6)             | 2.200 (55.9)          | 1              | 1500            | B30-R6000   |
| Fig. 2  | B33-18-484         | B-484A | White | 3.000 (76.2)            | 1.000 (25.4)             | -                         | 1.125 (28.6)             | 3.200 (81.3)          | 1              | 1500            | B30-R6000   |
| Fig. 2  | B33-19-484         | B-484A | White | 3.000 (76.2)            | 2.000 (50.8)             | -                         | 2.125 (54.0)             | 3.200 (81.3)          | 1              | 500             | B30-R6000   |
| <b>Raised Profile Polyester - Thick raised profile label with ultra-aggressive adhesive (B-593):</b>      |                    |        |       |                         |                          |                           |                          |                       |                |                 |             |
| Fig. 18c  | B30EP-171-593-WT   | B-593  | White | 0.490 (12.5)            | 1.060 (26.9)             | -                         | 0.750 (19.1)             | 1.375 (34.9)          | 1              | 500             | B30-R6000   |
| Fig. 18c  | B30EP-171-593-BK   | B-593  | Black | 0.490 (12.5)            | 1.060 (26.9)             | -                         | 0.750 (19.1)             | 1.375 (34.9)          | 1              | 500             | B30-R6000   |
| <b>Pre-Printed Vinyl - Permanent adhesive, conformable; Indoor / outdoor grade (B-595):</b>               |                    |        |       |                         |                          |                           |                          |                       |                |                 |             |
| Fig. 70   | B30-241-595-ANSIDA | B-595  |       | 2.250 (57.5)            | 3.000 (76.2)             | -                         | -                        | -                     | 1              | 300             | B30-R10000  |
| Fig. 70   | B30-25-595-ANSIDA  | B-595  |       | 4.000 (101.6)           | 6.000 (152.4)            | -                         | -                        | -                     | 1              | 175             | B30-R10000  |
| Fig. 70   | B30-241-595-ANSIWA | B-595  |       | 2.250 (57.5)            | 3.000 (76.2)             | -                         | -                        | -                     | 1              | 300             | B30-R10000  |
| Fig. 70   | B30-25-595-ANSIWA  | B-595  |       | 4.000 (101.6)           | 6.000 (152.4)            | -                         | -                        | -                     | 1              | 175             | B30-R10000  |

All part numbers above are compatible with BradyPrinter i3300 and BBP®33. Parts may also be compatible with BradyPrinter S3000, BradyPrinter S3100, BBP®30, BBP®31, BBP®35 and BBP®37 printers. Visit BradyID.com to confirm compatibility.

## Self-Laminating Wire and Cable Labels (B-427)

- Features white printable area with clear "tail" that wraps around marker to protect text
- Superior resistance to abrasion, handling, solvents, water, oil and dirt
- Vinyl with permanent acrylic adhesive designed specifically for tightly curved surfaces

Service temp: -40° to 158° F  
Agency approvals:  


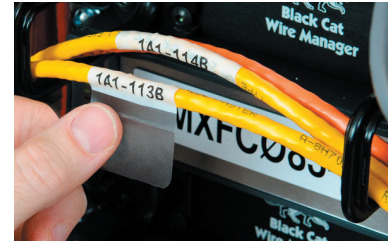


Figure 9a

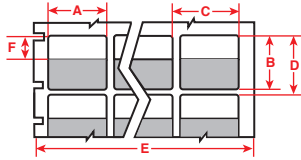


Figure 12




Figure 14




Figure 15

| Diagram | Catalog #     | B#    | Color | Label Width A Inch (mm) | Label Height B Inch (mm) | Horiz. Repeat C Inch (mm) | Vert. Repeat D Inch (mm) | Web Width E Inch (mm) | Print Area Height F Inch (mm) | Labels Per Row | Labels Per Roll | Rec. Ribbon |
|---------|---------------|-------|-------|-------------------------|--------------------------|---------------------------|--------------------------|-----------------------|-------------------------------|----------------|-----------------|-------------|
| Fig. 12 | B33-80-427    | B-427 | White | 0.500 (12.7)            | 0.750 (19.1)             | 0.600 (15.2)              | 0.950 (24.1)             | 2.500 (63.5)          | 0.375 (9.5)                   | 4              | 2500            | B30-R4300   |
| Fig. 12 | B33-113-427   | B-427 | White | 0.500 (12.7)            | 1.000 (25.4)             | 0.600 (15.2)              | 0.950 (24.1)             | 2.500 (63.5)          | 0.375 (9.5)                   | 4              | 2500            | B30-R4300   |
| Fig. 12 | B33-8-427     | B-427 | White | 0.500 (12.7)            | 1.437 (36.5)             | 0.662 (16.8)              | 1.625 (41.3)             | 3.350 (85.1)          | 0.500 (12.7)                  | 5              | 5000            | B30-R4300   |
| Fig. 12 | B33-56-427    | B-427 | White | 0.750 (19.1)            | 0.937 (23.8)             | 0.800 (20.3)              | 1.125 (28.6)             | 3.350 (85.1)          | 0.375 (9.5)                   | 4              | 5000            | B30-R4300   |
| Fig. 12 | B33-73-427    | B-427 | White | 0.750 (19.1)            | 1.750 (44.6)             | 0.800 (20.3)              | 1.875 (47.6)             | 3.350 (85.1)          | 0.500 (12.7)                  | 4              | 3500            | B30-R4300   |
| Fig. 12 | B33-74-427    | B-427 | White | 0.800 (20.3)            | 1.437 (36.5)             | 0.800 (20.3)              | 1.625 (41.3)             | 3.400 (86.4)          | 0.500 (12.7)                  | 4              | 4000            | B30-R4300   |
| Fig. 12 | B33-115-427   | B-427 | White | 1.000 (25.4)            | 0.750 (19.1)             | 1.100 (27.9)              | 0.875 (22.2)             | 2.300 (58.4)          | 0.375 (9.5)                   | 2              | 2500            | B30-R4300   |
| Fig. 12 | B33-116-427   | B-427 | White | 1.000 (25.4)            | 1.000 (25.4)             | 1.100 (27.9)              | 1.125 (28.6)             | 2.300 (58.4)          | 0.375 (9.5)                   | 2              | 2500            | B30-R4300   |
| Fig. 12 | B33-9-427     | B-427 | White | 1.000 (25.4)            | 1.437 (36.5)             | 1.075 (27.3)              | 1.625 (41.3)             | 3.350 (85.1)          | 0.500 (12.7)                  | 3              | 2500            | B30-R4300   |
| Fig. 12 | B33-75-427    | B-427 | White | 1.000 (25.4)            | 2.250 (57.2)             | 1.100 (27.9)              | 2.375 (60.3)             | 2.300 (58.4)          | 0.750 (19.1)                  | 2              | 1400            | B30-R4300   |
| Fig. 15 | B33-131-427   | B-427 | White | 1.000 (25.4)            | 2.625 (66.7)             | -                         | 1.125 (28.6)             | 2.825 (71.8)          | 1.000 (25.4)                  | 1              | 1500            | B30-R4300   |
| Fig. 12 | B33-10-427    | B-427 | White | 1.000 (25.4)            | 3.750 (95.3)             | 1.075 (27.3)              | 4.000 (101.6)            | 3.350 (85.1)          | 1.000 (25.4)                  | 3              | 1200            | B30-R4300   |
| Fig. 12 | B33-81-427    | B-427 | White | 1.000 (25.4)            | 6.000 (152.4)            | 1.100 (27.9)              | 6.187 (157.1)            | 2.300 (58.4)          | 1.500 (38.1)                  | 2              | 500             | B30-R4300   |
| Fig. 9a | B33-135-427AW | B-427 | White | 1.500 (38.1)            | 0.750 (19.1)             | -                         | 0.875 (22.2)             | 1.700 (43.2)          | -                             | 1              | 1500            | B30-R4300   |
| Fig. 14 | B33-118-427   | B-427 | White | 1.500 (38.1)            | 1.000 (25.4)             | -                         | 1.125 (28.6)             | 1.700 (43.2)          | 0.375 (9.5)                   | 1              | 1250            | B30-R4300   |
| Fig. 14 | B33-119-427   | B-427 | White | 1.500 (38.1)            | 1.500 (38.1)             | -                         | 1.750 (44.5)             | 1.700 (43.2)          | 0.500 (12.7)                  | 1              | 1000            | B30-R4300   |
| Fig. 14 | B33-272-427   | B-427 | White | 1.500 (38.1)            | 2.250 (57.2)             | -                         | 2.500 (63.5)             | 1.700 (43.2)          | 0.750 (19.1)                  | 1              | 700             | B30-R4300   |
| Fig. 14 | B33-120-427   | B-427 | White | 1.750 (44.5)            | 1.000 (25.4)             | -                         | 1.125 (28.6)             | 1.950 (49.5)          | 0.375 (9.5)                   | 1              | 1250            | B30-R4300   |
| Fig. 14 | B33-121-427   | B-427 | White | 1.750 (44.5)            | 1.500 (38.1)             | -                         | 1.750 (44.5)             | 1.950 (49.5)          | 0.500 (12.7)                  | 1              | 1000            | B30-R4300   |
| Fig. 14 | B33-273-427   | B-427 | White | 1.750 (44.5)            | 2.250 (57.2)             | -                         | 2.500 (63.5)             | 1.950 (49.5)          | 0.750 (19.1)                  | 1              | 500             | B30-R4300   |
| Fig. 9a | B33-137-427AW | B-427 | White | 2.000 (50.8)            | 1.000 (25.4)             | -                         | 1.125 (28.6)             | 2.200 (55.9)          | -                             | 1              | 1500            | B30-R4300   |
| Fig. 14 | B33-27-427    | B-427 | White | 2.000 (50.8)            | 3.750 (95.3)             | -                         | 4.000 (101.6)            | 2.200 (55.9)          | 1.000 (25.4)                  | 1              | 400             | B30-R4300   |
| Fig. 14 | B33-26-427    | B-427 | White | 2.500 (63.5)            | 2.250 (57.2)             | -                         | 2.438 (61.9)             | 2.700 (68.8)          | 0.750 (19.1)                  | 1              | 500             | B30-R4300   |
| Fig. 14 | B33-82-427    | B-427 | White | 2.000 (50.8)            | 6.000 (152.4)            | -                         | 6.187 (157.1)            | 2.200 (55.9)          | 1.500 (38.1)                  | 1              | 200             | B30-R4300   |

## Zero-Halogen Cable Markers (B-7643)

Thermoplastic Polyether Polyurethane is a zero-halogen high-density, thermoplastic cable marker designed for dot matrix or thermal-transfer printing.

- Meets the requirements of a halogen-free material per IEC 61249-2-21 (2003-11)
- Excellent chemical, oil and water resistance
- RoHS compliant using EU Directive 2002/95/EC
- Operating temperature of -40° to 193° F (-40° to 90° C)




Figure 61



| Diagram | Catalog #        | B#     | Color  | Label Width A Inch (mm) | Label Height B Inch (mm) | Labels Per Row | Labels Per Roll | Rec. Ribbon |
|---------|------------------|--------|--------|-------------------------|--------------------------|----------------|-----------------|-------------|
| Fig. 61 | B33-6010-7643-WT | B-7643 | White  | 2.36 (60)               | 0.39 (9.91)              | 1              | 500             | B30-R6000   |
| Fig. 61 | B33-7525-7643-WT | B-7643 | White  | 2.95 (75)               | 0.98 (24.9)              | 1              | 250             | B30-R6000   |
| Fig. 61 | B33-7510-7643-WT | B-7643 | White  | 2.95 (75)               | 0.39 (9.91)              | 1              | 500             | B30-R6000   |
| Fig. 61 | B33-7515-7643-WT | B-7643 | White  | 2.95 (75)               | 0.59 (14.9)              | 1              | 500             | B30-R6000   |
| Fig. 61 | B33-6010-7643-YL | B-7643 | Yellow | 2.36 (60)               | 0.39 (9.91)              | 1              | 500             | B30-R6000   |
| Fig. 61 | B33-7525-7643-YL | B-7643 | Yellow | 2.95 (75)               | 0.98 (24.9)              | 1              | 250             | B30-R6000   |
| Fig. 61 | B33-7510-7643-YL | B-7643 | Yellow | 2.95 (75)               | 0.39 (9.91)              | 1              | 500             | B30-R6000   |
| Fig. 61 | B33-7515-7643-YL | B-7643 | Yellow | 2.95 (75)               | 0.59 (14.9)              | 1              | 500             | B30-R6000   |

All part numbers above are compatible with BradyPrinter i3300 and BBP®33. Parts may also be compatible with BradyPrinter S3000, BradyPrinter S3100, BBP®30, BBP®31, BBP®35 and BBP®37 printers. Visit BradyID.com to confirm compatibility.

## High-Temp Adhesive Topcoated Polyvinylfluoride Wire and Cable Labels (B-437)

- Topcoated polyvinylfluoride label for wire and cable marking where high temperature and self-extinguishing features are required
- Heavy-duty performance with excellent resistance to water, oil and other fluids
- Meets MIL-M-87958 Standard

Service temp: -94° to 275° F  
Agency approvals: **RoHS**




Figure 1




Figure 3





Figure 4



| Diagram                  | Catalog #       | B#    | Color  | Label Width A<br>Inch (mm) | Label Height B<br>Inch (mm) | Horiz.<br>Repeat C<br>Inch (mm) | Vert.<br>Repeat D<br>Inch (mm) | Web Width E<br>Inch (mm) | Labels<br>Per Row | Labels<br>Per Roll | Rec. Ribbon |
|--------------------------|-----------------|-------|--------|----------------------------|-----------------------------|---------------------------------|--------------------------------|--------------------------|-------------------|--------------------|-------------|
| Fig. 4                   | B33-11-437      | B-437 | White  | 0.250 (6.4)                | 0.250 (6.4)                 | 0.250 (6.4)                     | 0.375 (9.5)                    | 3.200 (81.3)             | 12                | 15000              | B30-R4300   |
| Fig. 1                   | B33-1-437       | B-437 | White  | 0.750 (19.1)               | 0.250 (6.4)                 | 0.800 (20.3)                    | 0.350 (8.9)                    | 3.350 (85.1)             | 4                 | 5000               | B30-R4300   |
| Fig. 1                   | B33-2-437       | B-437 | White  | 0.900 (22.9)               | 0.250 (6.4)                 | 1.125 (28.6)                    | 0.350 (8.9)                    | 3.350 (85.1)             | 3                 | 5000               | B30-R4300   |
| Fig. 1                   | B33-5-437       | B-437 | White  | 1.000 (25.4)               | 0.500 (12.7)                | 1.075 (27.3)                    | 0.600 (15.2)                   | 3.350 (85.1)             | 3                 | 5000               | B30-R4300   |
| Fig. 1                   | B33-29-437      | B-437 | White  | 1.250 (31.8)               | 0.375 (9.5)                 | 1.300 (33.0)                    | 0.475 (12.1)                   | 2.750 (69.9)             | 2                 | 5000               | B30-R4300   |
| Fig. 1                   | B33-5-437YL     | B-437 | Yellow | 1.000 (25.4)               | 0.500 (12.7)                | 1.075 (27.3)                    | 0.600 (15.2)                   | 3.350 (85.1)             | 3                 | 5000               | B30-R4300   |
| Fig. 1                   | B33-29-437YL    | B-437 | Yellow | 1.250 (31.8)               | 0.375 (9.5)                 | 1.300 (33.0)                    | 0.475 (12.1)                   | 2.750 (69.9)             | 2                 | 5000               | B30-R4300   |
| <b>Continuous Rolls:</b> |                 |       |        |                            |                             |                                 |                                |                          |                   |                    |             |
| Fig. 3                   | B33C-1000-437   | B-437 | White  | 1.000 (25.4)               | 85 ft. (25.9m)              | -                               | -                              | 1.200 (30.5)             | 1 roll (cont.)    |                    | B30-R4300   |
| Fig. 3                   | B33C-1500-437   | B-437 | White  | 1.500 (38.1)               | 85 ft. (25.9m)              | -                               | -                              | 1.900 (48.3)             | 1 roll (cont.)    |                    | B30-R4300   |
| Fig. 3                   | B33C-2000-437   | B-437 | White  | 2.000 (50.8)               | 85 ft. (25.9m)              | -                               | -                              | 2.200 (55.9)             | 1 roll (cont.)    |                    | B30-R4300   |
| Fig. 3                   | B33C-3000-437   | B-437 | White  | 3.000 (76.2)               | 85 ft. (25.9m)              | -                               | -                              | 3.400 (86.4)             | 1 roll (cont.)    |                    | B30-R4300   |
| Fig. 3                   | B33C-1000-437YL | B-437 | Yellow | 1.000 (25.4)               | 85 ft. (25.9m)              | -                               | -                              | 1.200 (30.5)             | 1 roll (cont.)    |                    | B30-R4300   |
| Fig. 3                   | B33C-1500-437YL | B-437 | Yellow | 1.500 (38.1)               | 85 ft. (25.9m)              | -                               | -                              | 1.900 (48.3)             | 1 roll (cont.)    |                    | B30-R4300   |
| Fig. 3                   | B33C-2000-437YL | B-437 | Yellow | 2.000 (50.8)               | 85 ft. (25.9m)              | -                               | -                              | 2.200 (55.9)             | 1 roll (cont.)    |                    | B30-R4300   |
| Fig. 3                   | B33C-3000-437YL | B-437 | Yellow | 3.000 (76.2)               | 85 ft. (25.9m)              | -                               | -                              | 3.400 (86.4)             | 1 roll (cont.)    |                    | B30-R4300   |

### ▶ Also available in self-laminating format

B-437 High-Temp Adhesive Wire and Cable Labels are available in self-laminating format as a custom order. Contact Brady to order B-642 material and B30-R4300 ribbon.

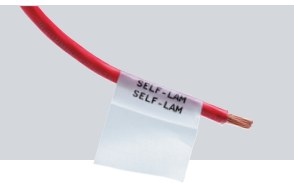

## Vinyl Cloth Adhesive Wire and Cable Labels (B-498)

- A vinyl cloth label for marking wires, cables and inside-panel components
- Repositionable – a highly unique adhesive and cloth construction gives excellent holding power and still allows for clean removal and reapplication
- Ideal choice for marking both ends of a wire that you may need to cut shorter before final termination

Service temp: -40° to 175° F  
Agency approvals: **UL RoHS CE**





Figure 1



| Diagram | Catalog #  | B#    | Color | Label Width A<br>Inch (mm) | Label Height B<br>Inch (mm) | Horiz.<br>Repeat C<br>Inch (mm) | Vert.<br>Repeat D<br>Inch (mm) | Web Width E<br>Inch (mm) | Labels<br>Per Row | Labels<br>Per Roll | Rec. Ribbon |
|---------|------------|-------|-------|----------------------------|-----------------------------|---------------------------------|--------------------------------|--------------------------|-------------------|--------------------|-------------|
| Fig. 1  | B33-90-498 | B-498 | White | 0.250 (6.4)                | 1.437 (36.5)                | 0.350 (8.9)                     | 1.562 (39.7)                   | 2.200 (55.9)             | 6                 | 2500               | B30-R6200   |
| Fig. 1  | B33-68-498 | B-498 | White | 0.500 (12.7)               | 0.750 (19.1)                | 0.600 (15.2)                    | 0.875 (22.2)                   | 2.500 (63.5)             | 4                 | 5000               | B30-R6200   |
| Fig. 1  | B33-87-498 | B-498 | White | 0.500 (12.7)               | 1.437 (36.5)                | 0.600 (15.2)                    | 1.562 (39.7)                   | 3.700 (94)               | 6                 | 2500               | B30-R6200   |
| Fig. 1  | B33-1-498  | B-498 | White | 0.750 (19.1)               | 0.250 (6.4)                 | 0.800 (20.3)                    | 0.350 (8.9)                    | 3.350 (85.1)             | 4                 | 5000               | B30-R6200   |
| Fig. 1  | B33-91-498 | B-498 | White | 0.750 (19.1)               | 0.937 (23.8)                | 0.850 (21.6)                    | 1.062 (27.0)                   | 3.500 (88.9)             | 4                 | 2500               | B30-R6200   |
| Fig. 1  | B33-95-498 | B-498 | White | 0.800 (20.3)               | 1.437 (36.5)                | 0.900 (22.9)                    | 1.562 (39.7)                   | 2.800 (71.1)             | 3                 | 2300               | B30-R6200   |
| Fig. 1  | B33-5-498  | B-498 | White | 1.000 (25.4)               | 0.500 (12.7)                | 1.075 (27.3)                    | 0.600 (15.2)                   | 3.350 (85.1)             | 3                 | 5000               | B30-R6200   |
| Fig. 1  | B33-88-498 | B-498 | White | 1.000 (25.4)               | 0.750 (19.1)                | 1.100 (27.9)                    | 0.875 (22.2)                   | 2.300 (58.4)             | 2                 | 2500               | B30-R6200   |
| Fig. 1  | B33-89-498 | B-498 | White | 1.000 (25.4)               | 1.437 (36.5)                | 1.100 (27.9)                    | 1.562 (39.7)                   | 3.400 (86.4)             | 3                 | 2300               | B30-R6200   |

All part numbers above are compatible with BradyPrinter i3300 and BBP®33. arts may also be compatible with BradyPrinter S3000, BradyPrinter S3100, BBP®30, BBP®31, BBP®35 and BBP®37 printers. Visit BradyID.com to confirm compatibility.

## High-Temp Adhesive Polyimide Wire and Cable Labels (B-472)

- Topcoated polyimide label for wire and cable marking where high temperature and self-extinguishing features are required
- Heavy-duty performance with excellent resistance to water, oil and other fluids

Service temp: -94° to 320° F

Agency approvals: **RoHS**




Figure 1




Figure 3




Figure 4



| Diagram                  | Catalog #       | B#    | Color  | Label Width A Inch (mm) | Label Height B Inch (mm) | Horiz. Repeat C Inch (mm) | Vert. Repeat D Inch (mm) | Web Width E Inch (mm) | Labels Per Row | Labels Per Roll | Rec. Ribbon |
|--------------------------|-----------------|-------|--------|-------------------------|--------------------------|---------------------------|--------------------------|-----------------------|----------------|-----------------|-------------|
| Fig. 4                   | B33-11-472      | B-472 | White  | 0.250 (6.4)             | 0.250 (6.4)              | 0.250 (6.4)               | 0.375 (9.5)              | 3.200 (81.3)          | 12             | 15000           | B30-R4300   |
| Fig. 1                   | B33-1-472       | B-472 | White  | 0.750 (19.1)            | 0.250 (6.4)              | 0.800 (20.3)              | 0.350 (8.9)              | 3.350 (85.1)          | 4              | 5000            | B30-R4300   |
| Fig. 1                   | B33-2-472       | B-472 | White  | 0.900 (22.9)            | 0.250 (6.4)              | 1.125 (28.6)              | 0.350 (8.9)              | 3.350 (85.1)          | 3              | 5000            | B30-R4300   |
| Fig. 1                   | B33-5-472       | B-472 | White  | 1.000 (25.4)            | 0.500 (12.7)             | 1.075 (27.3)              | 0.600 (15.2)             | 3.350 (85.1)          | 3              | 5000            | B30-R4300   |
| Fig. 1                   | B33-29-472      | B-472 | White  | 1.250 (31.8)            | 0.375 (9.5)              | 1.300 (33.0)              | 0.475 (12.1)             | 2.750 (69.9)          | 2              | 5000            | B30-R4300   |
| Fig. 1                   | B33-5-472YL     | B-472 | Yellow | 1.000 (25.4)            | 0.500 (12.7)             | 1.075 (27.3)              | 0.600 (15.2)             | 3.350 (85.1)          | 3              | 5000            | B30-R4300   |
| Fig. 1                   | B33-29-472YL    | B-472 | Yellow | 1.250 (31.8)            | 0.375 (9.5)              | 1.300 (33.0)              | 0.475 (12.1)             | 2.750 (69.9)          | 2              | 5000            | B30-R4300   |
| <b>Continuous Rolls:</b> |                 |       |        |                         |                          |                           |                          |                       |                |                 |             |
| Fig. 3                   | B33C-1000-472   | B-472 | White  | 1.000 (25.4)            | 85ft (25.9m)             | -                         | -                        | 1.200 (30.5)          | 1 roll (cont.) |                 | B30-R4300   |
| Fig. 3                   | B33C-1500-472   | B-472 | White  | 1.500 (38.1)            | 85ft (25.9m)             | -                         | -                        | 1.900 (48.3)          | 1 roll (cont.) |                 | B30-R4300   |
| Fig. 3                   | B33C-2000-472   | B-472 | White  | 2.000 (50.8)            | 85ft (25.9m)             | -                         | -                        | 2.200 (55.9)          | 1 roll (cont.) |                 | B30-R4300   |
| Fig. 3                   | B33C-3000-472   | B-472 | White  | 3.000 (76.2)            | 85ft (25.9m)             | -                         | -                        | 3.400 (86.4)          | 1 roll (cont.) |                 | B30-R4300   |
| Fig. 3                   | B33C-1000-472YL | B-472 | Yellow | 1.000 (25.4)            | 85ft (25.9m)             | -                         | -                        | 1.200 (30.5)          | 1 roll (cont.) |                 | B30-R4300   |
| Fig. 3                   | B33C-1500-472YL | B-472 | Yellow | 1.500 (38.1)            | 85ft (25.9m)             | -                         | -                        | 1.900 (48.3)          | 1 roll (cont.) |                 | B30-R4300   |
| Fig. 3                   | B33C-2000-472YL | B-472 | Yellow | 2.000 (50.8)            | 85ft (25.9m)             | -                         | -                        | 2.200 (55.9)          | 1 roll (cont.) |                 | B30-R4300   |
| Fig. 3                   | B33C-3000-472YL | B-472 | Yellow | 3.000 (76.2)            | 85ft (25.9m)             | -                         | -                        | 3.400 (86.4)          | 1 roll (cont.) |                 | B30-R4300   |

## Terminal Block Adhesive Strips (B-498)

- Specially designed narrow-width continuous label for alignment on terminal blocks and patch panels
- Highly unique adhesive and vinyl cloth construction gives excellent holding power and still allows for clean removal and reapplication

Service temp: -40° to 175° F

Agency approvals: **UL RoHS**




Figure 3



| Diagram | Catalog #    | B#    | Color | Label Width A Inch (mm) | Roll Length B Feet (m) | Web Width E Inch (mm) | Labels Per Roll | Rec. Ribbon |
|---------|--------------|-------|-------|-------------------------|------------------------|-----------------------|-----------------|-------------|
| Fig. 3  | B33C-312-498 | B-498 | White | 0.312 (7.9)             | 85 (25.9)              | 1.000 (25.4)          | 1 roll (cont.)  | B30-R6200   |
| Fig. 3  | B33C-375-498 | B-498 | White | 0.375 (9.5)             | 85 (25.9)              | 1.000 (25.4)          | 1 roll (cont.)  | B30-R6200   |

## Patch Panel Adhesive Strips (B-422)

- Continuous supply that makes labeling patch panels and other datacomm components quick and easy
- Aggressive adhesive suitable for rough, highly textured and powder-coated surfaces as well as smooth surfaces

Service temp: -40° to 212° F

Agency approvals: **UL RoHS**




Figure 3



| Diagram | Catalog #    | B#    | Color | Label Width A Inch (mm) | Roll Length B Feet (m) | Web Width E Inch (mm) | Labels Per Roll | Rec. Ribbon |
|---------|--------------|-------|-------|-------------------------|------------------------|-----------------------|-----------------|-------------|
| Fig. 3  | B33C-312-422 | B-422 | White | 0.312 (7.9)             | 85 (25.9)              | 1.000 (25.4)          | 1 roll (cont.)  | B30-R6000   |
| Fig. 3  | B33C-375-422 | B-422 | White | 0.375 (9.5)             | 85 (25.9)              | 1.000 (25.4)          | 1 roll (cont.)  | B30-R6000   |

All part numbers above are compatible with BradyPrinter i3300 and BBP®33. Parts may also be compatible with BradyPrinter S3000, BradyPrinter S3100, BBP®30, BBP®31, BBP®35 and BBP®37 printers. Visit BradyID.com to confirm compatibility.



# PermaSleeve® PS Polyolefin Wire Marking Sleeves (B-342)

Standard Military / Industrial Grade. 3:1 Shrink ratio.

- A 3:1 heat-shrinkable wire marker sleeve that fits snugly around wires
- Can be used for identification or wire protection
- Fade-resistant and flame-retardant
- Meets the following insulating and physical property specifications:
  - SAE-AS-23053/5 and SAE-AS-81531
  - Tested per ASTM E162, ASTM E662 and MIL-STD-202

Service temp: -40° to 267° F  
 (short burst max. temp: 5 min at 500° F, 24 hrs at 350° F)  
 Agency approvals:

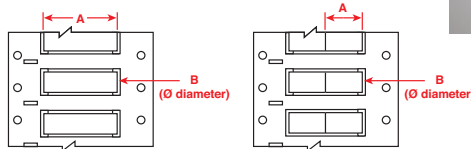



Figure 20

Figure 20-2


| Diagram  | Catalog #            | Material | Color  | For Wire Gauge (approx.) | Range For Wire Diameters Inch (mm) | Supplied Diameter B Inch (mm) | Recovered Diameter Inch (mm) | Recovered Wall Thickness Inch (mm) | Sleeves Per Row | Sleeves Per Roll | Rec. Ribbon  |
|--|----------------------|----------|--------|--------------------------|------------------------------------|-------------------------------|------------------------------|------------------------------------|-----------------|------------------|--------------|
| <b>3:1 Shrink ratio single-side printable, 2 in. sleeve width (dimension A):</b>                                 |                      |          |        |                          |                                    |                               |                              |                                    |                 |                  |              |
| Fig. 20  | * B33-94-2-342       | B-342    | White  | 28 to 20                 | 0.023 (0.6) - 0.080 (2.0)          | 0.094 (2.4)                   | 0.024 (0.6)                  | .024 (0.6) +/- .003 (0.07)         | 1               | 1000             | B30-R4300    |
| Fig. 20  | * B33-125-2-342      | B-342    | White  | 22 to 16                 | 0.046 (1.2) - 1.110 (2.8)          | 0.125 (3.2)                   | 0.047 (1.2)                  | .020 (0.5) +/- .003 (0.07)         | 1               | 1000             | B30-R4300    |
| Fig. 20  | * B33-187-2-342      | B-342    | White  | 20 to 10                 | 0.062 (1.6) - 0.150 (3.8)          | 0.187 (4.7)                   | 0.062 (1.6)                  | .020 (0.5) +/- .003 (0.07)         | 1               | 750              | B30-R4300    |
| Fig. 20  | * B33-250-2-342      | B-342    | White  | 16 to 8                  | 0.094 (2.4) - 0.215 (5.5)          | 0.250 (6.4)                   | 0.093 (2.4)                  | .025 (0.6) +/- .003 (0.07)         | 1               | 500              | B30-R4300    |
| Fig. 20  | * B33-375-2-342      | B-342    | White  | 12 to 4                  | 0.125 (3.2) - 0.320 (8.1)          | 0.375 (9.5)                   | 0.125 (3.1)                  | .025 (0.6) +/- .003 (0.07)         | 1               | 500              | B30-R4300    |
| Fig. 20  | * B33-500-2-342      | B-342    | White  | 8 to 1                   | 0.187 (4.8) - 0.450 (11.4)         | 0.500 (12.7)                  | 0.187 (4.7)                  | .025 (0.6) +/- .003 (0.07)         | 1               | 350              | B30-R4300    |
| Fig. 20  | * B33-750-2-342      | B-342    | White  | 6 to 4/0                 | 0.250 (6.4) - 0.700 (17.8)         | 0.750 (19.0)                  | 0.250 (6.4)                  | .025 (0.6) +/- .003 (0.07)         | 1               | 250              | B30-R4300    |
| Fig. 20  | * B33-1000-2-342     | B-342    | White  | 2 to 0.950 dia           | 0.333 (8.5) - 0.950 (24.1)         | 1.000 (25.4)                  | 0.375 (9.5)                  | .036 (0.9) +/- .003 (0.07)         | 1               | 250              | B30-R4300    |
| Fig. 20  | * B33-1500-2-342     | B-342    | White  | n/a                      | 0.500 (12.7) - 1.400 (35.6)        | 1.500 (38.1)                  | 0.500 (12.7)                 | .035 (0.9) +/- .003 (0.07)         | 1               | 150              | B30-R4300    |
| Fig. 20  | * B33-94-2-342YL     | B-342    | Yellow | 28 to 20                 | 0.023 (0.6) - 0.080 (2.0)          | 0.094 (2.4)                   | 0.024 (0.6)                  | .024 (0.6) +/- .003 (0.07)         | 1               | 1000             | B30-R4300    |
| Fig. 20  | * B33-125-2-342YL    | B-342    | Yellow | 22 to 16                 | 0.046 (1.2) - 1.110 (2.8)          | 0.125 (3.2)                   | 0.047 (1.2)                  | .020 (0.5) +/- .003 (0.07)         | 1               | 1000             | B30-R4300    |
| Fig. 20  | * B33-187-2-342YL    | B-342    | Yellow | 20 to 10                 | 0.062 (1.6) - 0.150 (3.8)          | 0.187 (4.7)                   | 0.062 (1.6)                  | .020 (0.5) +/- .003 (0.07)         | 1               | 750              | B30-R4300    |
| Fig. 20  | * B33-250-2-342YL    | B-342    | Yellow | 16 to 8                  | 0.094 (2.4) - 0.215 (5.5)          | 0.250 (6.4)                   | 0.093 (2.4)                  | .025 (0.6) +/- .003 (0.07)         | 1               | 500              | B30-R4300    |
| Fig. 20  | * B33-375-2-342YL    | B-342    | Yellow | 12 to 4                  | 0.125 (3.2) - 0.320 (8.1)          | 0.375 (9.5)                   | 0.125 (3.1)                  | .025 (0.6) +/- .003 (0.07)         | 1               | 500              | B30-R4300    |
| Fig. 20  | * B33-500-2-342YL    | B-342    | Yellow | 8 to 1                   | 0.187 (4.8) - 0.450 (11.4)         | 0.500 (12.7)                  | 0.187 (4.7)                  | .025 (0.6) +/- .003 (0.07)         | 1               | 350              | B30-R4300    |
| Fig. 20  | * B33-750-2-342YL    | B-342    | Yellow | 6 to 4/0                 | 0.250 (6.4) - 0.700 (17.8)         | 0.750 (19.0)                  | 0.250 (6.4)                  | .025 (0.6) +/- .003 (0.07)         | 1               | 250              | B30-R4300    |
| Fig. 20  | * B33-1000-2-342YL   | B-342    | Yellow | 2 to 0.950 dia           | 0.333 (8.5) - 0.950 (24.1)         | 1.000 (25.4)                  | 0.375 (9.5)                  | .036 (0.9) +/- .003 (0.07)         | 1               | 250              | B30-R4300    |
| Fig. 20  | * B33-1500-2-342YL   | B-342    | Yellow | n/a                      | 0.500 (12.7) - 1.400 (35.6)        | 1.500 (38.1)                  | 0.500 (12.7)                 | .035 (0.9) +/- .003 (0.07)         | 1               | 150              | B30-R4300    |
| Fig. 20  | * B33-1500-2-342BK   | B-342    | Black  | n/a                      | 0.500 (12.7) - 1.400 (35.6)        | 1.500 (38.1)                  | 0.500 (12.7)                 | .035 (0.9) +/- .003 (0.07)         | 1               | 150              | B30-R4500-SV |
| <b>3:1 Shrink ratio single-side printable, 1 in. sleeve width in "2-up pre-cut" configuration (dimension A):</b> |                      |          |        |                          |                                    |                               |                              |                                    |                 |                  |              |
| Fig. 20-2  | * B33-94-2-342-2     | B-342    | White  | 28 to 20                 | 0.023 (0.6) - 0.080 (2.0)          | 0.094 (2.4)                   | 0.024 (0.6)                  | .024 (0.6) +/- .003 (0.07)         | 2               | 2000             | B30-R4300    |
| Fig. 20-2  | * B33-125-2-342-2    | B-342    | White  | 22 to 16                 | 0.046 (1.2) - 0.111 (2.8)          | 0.125 (3.2)                   | 0.047 (1.2)                  | .020 (0.5) +/- .003 (0.07)         | 2               | 2000             | B30-R4300    |
| Fig. 20-2  | * B33-187-2-342-2    | B-342    | White  | 20 to 10                 | 0.062 (1.6) - 0.150 (3.8)          | 0.187 (4.7)                   | 0.062 (1.6)                  | .020 (0.5) +/- .003 (0.07)         | 2               | 1500             | B30-R4300    |
| Fig. 20-2  | * B33-250-2-342-2    | B-342    | White  | 16 to 8                  | 0.094 (2.4) - 0.215 (5.5)          | 0.250 (6.4)                   | 0.093 (2.4)                  | .025 (0.6) +/- .003 (0.07)         | 2               | 1000             | B30-R4300    |
| Fig. 20-2  | * B33-375-2-342-2    | B-342    | White  | 12 to 4                  | 0.125 (3.2) - 0.320 (8.1)          | 0.375 (9.5)                   | 0.125 (3.1)                  | .025 (0.6) +/- .003 (0.07)         | 2               | 1000             | B30-R4300    |
| Fig. 20-2  | * B33-500-2-342-2    | B-342    | White  | 8 to 1                   | 0.187 (4.8) - 0.450 (11.4)         | 0.500 (12.7)                  | 0.119 (3.0)                  | .025 (0.6) +/- .003 (0.07)         | 2               | 700              | B30-R4300    |
| Fig. 20-2  | * B33-750-2-342-2    | B-342    | White  | 6 to 4/0                 | 0.250 (6.4) - 0.700 (17.8)         | 0.750 (19.1)                  | 0.250 (6.35)                 | .025 (0.6) +/- .003 (0.07)         | 2               | 500              | B30-R4300    |
| Fig. 20-2  | * B33-1000-2-342-2   | B-342    | White  | 2 to 0.950 dia           | 0.333 (8.5) - 0.950 (24.1)         | 1.000 (25.4)                  | 0.375 (9.5)                  | .036 (0.9) +/- .003 (0.07)         | 2               | 500              | B30-R4300    |
| Fig. 20-2  | * B33-1500-2-342-2   | B-342    | White  | n/a                      | 0.500 (12.7) - 1.400 (35.6)        | 1.500 (38.1)                  | 0.500 (12.7)                 | .035 (0.9) +/- .003 (0.07)         | 2               | 150              | B30-R4300    |
| Fig. 20-2  | * B33-94-2-342YL-2   | B-342    | Yellow | 28 to 20                 | 0.023 (0.6) - 0.080 (2.0)          | 0.094 (2.4)                   | 0.024 (0.6)                  | .024 (0.6) +/- .003 (0.07)         | 2               | 2000             | B30-R4300    |
| Fig. 20-2  | * B33-125-2-342YL-2  | B-342    | Yellow | 22 to 16                 | 0.046 (1.2) - 0.111 (2.8)          | 0.125 (3.2)                   | 0.047 (1.2)                  | .020 (0.5) +/- .003 (0.07)         | 2               | 2000             | B30-R4300    |
| Fig. 20-2  | * B33-750-2-342YL-2  | B-342    | Yellow | 6 to 4/0                 | 0.250 (6.4) - 0.700 (17.8)         | 0.750 (19.1)                  | 0.250 (6.35)                 | .025 (0.6) +/- .003 (0.07)         | 2               | 500              | B30-R4300    |
| Fig. 20-2  | * B33-500-2-342YL-2  | B-342    | Yellow | 8 to 1                   | 0.187 (4.8) - 0.450 (11.4)         | 0.500 (12.7)                  | 0.119 (3.0)                  | .025 (0.6) +/- .003 (0.07)         | 2               | 700              | B30-R4300    |
| Fig. 20-2  | * B33-1000-2-342YL-2 | B-342    | Yellow | 2 to 0.950 dia           | 0.333 (8.5) - 0.950 (24.1)         | 1.000 (25.4)                  | 0.375 (9.5)                  | .036 (0.9) +/- .003 (0.07)         | 2               | 500              | B30-R4300    |
| Fig. 20-2  | * B33-1500-2-342YL-2 | B-342    | Yellow | n/a                      | 0.500 (12.7) - 1.400 (35.6)        | 1.500 (38.1)                  | 0.500 (12.7)                 | .035 (0.9) +/- .003 (0.07)         | 2               | 300              | B30-R4300    |

\* **WARNING:** Cancer [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

All part numbers above are compatible with BradyPrinter i3300 and BBP®33. Parts may also be compatible with BradyPrinter S3000, BradyPrinter S3100, BBP®30, BBP®31, BBP®35 and BBP®37 printers. Visit [BradyID.com](http://BradyID.com) to confirm compatibility.

## B-342 PermaSleeve® PS Polyolefin Wire Marking Sleeves (Continued)

| Diagram  | Catalog #           | Material | Color  | For Wire Gauge (approx.) | Range For Wire Diameters Inch (mm) | Supplied Diameter B Inch (mm) | Recovered Diameter Inch (mm) | Recovered Wall Thickness Inch (mm) | Sleeves Per Row | Per Roll | Rec. Ribbon  |
|--|---------------------|----------|--------|--------------------------|------------------------------------|-------------------------------|------------------------------|------------------------------------|-----------------|----------|--------------|
| <b>3:1 Shrink ratio double-side printable, 2 in. sleeve width (dimension A):</b> |                     |          |        |                          |                                    |                               |                              |                                    |                 |          |              |
| Fig. 20  | * B33D-94-2-342     | B-342    | White  | 28 to 20                 | 0.023 (0.6) - 0.080 (2.0)          | 0.094 (2.4)                   | 0.024 (0.6)                  | .024 (0.6) +/- .003 (0.07)         | 1               | 1000     | B30-R4300    |
| Fig. 20  | * B33D-125-2-342    | B-342    | White  | 22 to 16                 | 0.046 (1.2) - 1.110 (2.8)          | 0.125 (3.2)                   | 0.047 (1.2)                  | .020 (0.5) +/- .003 (0.07)         | 1               | 1000     | B30-R4300    |
| Fig. 20  | * B33D-125-2-342-2  | B-342    | White  | 22 to 16                 | 0.046 (1.2) - 1.110 (2.8)          | 0.125 (3.2)                   | 0.047 (1.2)                  | .020 (0.5) +/- .003 (0.07)         | 2               | 2000     | B30-R4300    |
| Fig. 20  | * B33D-187-2-342    | B-342    | White  | 20 to 10                 | 0.062 (1.6) - 0.150 (3.8)          | 0.187 (4.7)                   | 0.062 (1.6)                  | .020 (0.5) +/- .003 (0.07)         | 1               | 750      | B30-R4300    |
| Fig. 20  | * B33D-250-2-342    | B-342    | White  | 16 to 8                  | 0.094 (2.4) - 0.215 (5.5)          | 0.250 (6.4)                   | 0.093 (2.4)                  | .025 (0.6) +/- .003 (0.07)         | 1               | 500      | B30-R4300    |
| Fig. 20  | * B33D-375-2-342    | B-342    | White  | 12 to 4                  | 0.125 (3.2) - 0.320 (8.1)          | 0.375 (9.5)                   | 0.125 (3.1)                  | .025 (0.6) +/- .003 (0.07)         | 1               | 500      | B30-R4300    |
| Fig. 20  | * B33D-500-2-342    | B-342    | White  | 8 to 1                   | 0.187 (4.8) - 0.450 (11.4)         | 0.500 (12.7)                  | 0.187 (4.7)                  | .025 (0.6) +/- .003 (0.07)         | 1               | 350      | B30-R4300    |
| Fig. 20  | * B33D-750-2-342    | B-342    | White  | 6 to 4/0                 | 0.250 (6.4) - 0.700 (17.8)         | 0.750 (19.0)                  | 0.250 (6.4)                  | .025 (0.6) +/- .003 (0.07)         | 1               | 250      | B30-R4300    |
| Fig. 20  | * B33D-1000-2-342   | B-342    | White  | 2 to 0.950 dia           | 0.333 (8.5) - 0.950 (24.1)         | 1.000 (25.4)                  | 0.375 (9.5)                  | .036 (0.9) +/- .003 (0.07)         | 1               | 250      | B30-R4300    |
| Fig. 20  | * B33D-1500-2-342   | B-342    | White  | n/a                      | 0.500 (12.7) - 1.400 (35.6)        | 1.500 (38.1)                  | 0.500 (12.7)                 | .035 (0.9) +/- .003 (0.07)         | 1               | 150      | B30-R4300    |
| Fig. 20  | * B33D-94-2-342YL   | B-342    | Yellow | 28 to 20                 | 0.023 (0.6) - 0.080 (2.0)          | 0.094 (2.4)                   | 0.024 (0.6)                  | .024 (0.6) +/- .003 (0.07)         | 1               | 1000     | B30-R4300    |
| Fig. 20  | * B33D-125-2-342YL  | B-342    | Yellow | 22 to 16                 | 0.046 (1.2) - 1.110 (2.8)          | 0.125 (3.2)                   | 0.047 (1.2)                  | .020 (0.5) +/- .003 (0.07)         | 1               | 1000     | B30-R4300    |
| Fig. 20  | * B33D-187-2-342YL  | B-342    | Yellow | 20 to 10                 | 0.062 (1.6) - 0.150 (3.8)          | 0.187 (4.7)                   | 0.062 (1.6)                  | .020 (0.5) +/- .003 (0.07)         | 1               | 750      | B30-R4300    |
| Fig. 20  | * B33D-250-2-342YL  | B-342    | Yellow | 16 to 8                  | 0.094 (2.4) - 0.215 (5.5)          | 0.250 (6.4)                   | 0.093 (2.4)                  | .025 (0.6) +/- .003 (0.07)         | 1               | 500      | B30-R4300    |
| Fig. 20  | * B33D-375-2-342YL  | B-342    | Yellow | 12 to 4                  | 0.125 (3.2) - 0.320 (8.1)          | 0.375 (9.5)                   | 0.125 (3.1)                  | .025 (0.6) +/- .003 (0.07)         | 1               | 500      | B30-R4300    |
| Fig. 20  | * B33D-500-2-342YL  | B-342    | Yellow | 8 to 1                   | 0.187 (4.8) - 0.450 (11.4)         | 0.500 (12.7)                  | 0.187 (4.7)                  | .025 (0.6) +/- .003 (0.07)         | 1               | 350      | B30-R4300    |
| Fig. 20  | * B33D-750-2-342YL  | B-342    | Yellow | 6 to 4/0                 | 0.250 (6.4) - 0.700 (17.8)         | 0.750 (19.0)                  | 0.250 (6.4)                  | .025 (0.6) +/- .003 (0.07)         | 1               | 250      | B30-R4300    |
| Fig. 20  | * B33D-1000-2-342YL | B-342    | Yellow | 2 to 0.950 dia           | 0.333 (8.5) - 0.950 (24.1)         | 1.000 (25.4)                  | 0.375 (9.5)                  | .036 (0.9) +/- .003 (0.07)         | 1               | 250      | B30-R4300    |
| Fig. 20  | * B33D-1500-2-342YL | B-342    | Yellow | n/a                      | 0.500 (12.7) - 1.400 (35.6)        | 1.500 (38.1)                  | 0.500 (12.7)                 | .035 (0.9) +/- .003 (0.07)         | 1               | 150      | B30-R4300    |
| Fig. 20  | * B33D-94-2-342BK   | B-342    | Black  | 28 to 20                 | 0.023 (0.6) - 0.080 (2.0)          | 0.094 (2.4)                   | 0.024 (0.6)                  | .024 (0.6) +/- .003 (0.07)         | 1               | 1000     | B30-R4500-SV |
| Fig. 20  | * B33D-125-2-342BK  | B-342    | Black  | 22 to 16                 | 0.046 (1.2) - 1.110 (2.8)          | 0.125 (3.2)                   | 0.047 (1.2)                  | .020 (0.5) +/- .003 (0.07)         | 1               | 1000     | B30-R4500-SV |
| Fig. 20  | * B33D-187-2-342BK  | B-342    | Black  | 20 to 10                 | 0.062 (1.6) - 0.150 (3.8)          | 0.187 (4.7)                   | 0.062 (1.6)                  | .020 (0.5) +/- .003 (0.07)         | 1               | 750      | B30-R4500-SV |
| Fig. 20  | * B33D-250-2-342BK  | B-342    | Black  | 16 to 8                  | 0.094 (2.4) - 0.215 (5.5)          | 0.250 (6.4)                   | 0.093 (2.4)                  | .025 (0.6) +/- .003 (0.07)         | 1               | 500      | B30-R4500-SV |
| Fig. 20  | * B33D-375-2-342BK  | B-342    | Black  | 12 to 4                  | 0.125 (3.2) - 0.320 (8.1)          | 0.375 (9.5)                   | 0.125 (3.1)                  | .025 (0.6) +/- .003 (0.07)         | 1               | 500      | B30-R4500-SV |
| Fig. 20  | * B33D-500-2-342BK  | B-342    | Black  | 8 to 1                   | 0.187 (4.8) - 0.450 (11.4)         | 0.500 (12.7)                  | 0.187 (4.7)                  | .025 (0.6) +/- .003 (0.07)         | 1               | 350      | B30-R4500-SV |
| Fig. 20  | * B33D-750-2-342BK  | B-342    | Black  | 6 to 4/0                 | 0.250 (6.4) - 0.700 (17.8)         | 0.750 (19.0)                  | 0.250 (6.4)                  | .025 (0.6) +/- .003 (0.07)         | 1               | 250      | B30-R4500-SV |
| Fig. 20  | * B33D-1000-2-342BK | B-342    | Black  | 2 to 0.950 dia           | 0.333 (8.5) - 0.950 (24.1)         | 1.000 (25.4)                  | 0.375 (9.5)                  | .036 (0.9) +/- .003 (0.07)         | 1               | 250      | B30-R4500-SV |
| Fig. 20  | * B33D-1500-2-342BK | B-342    | Black  | n/a                      | 0.500 (12.7) - 1.400 (35.6)        | 1.500 (38.1)                  | 0.500 (12.7)                 | .035 (0.9) +/- .003 (0.07)         | 1               | 150      | B30-R4500-SV |

\*  **WARNING:** Cancer [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)


### QuickSleeve Handheld Sleeve Applicator

The QuickSleeve Handheld Sleeve Applicator is an intuitive multi-tool designed to help you quickly apply sleeves on to wires in three simple steps – just pick, slip and apply. This tool includes:

- Four specially designed slanted tubes sized for sleeve sizes 0.094, 0.125, 0.187 and 0.250 inches
- Built-in LED flashlight for use in low-lit conditions
- Terminal block sized screwdriver



| Catalog # | Description            | Qty.  |
|-----------|------------------------|-------|
| QS        | QuickSleeve multi-tool | 1 Set |

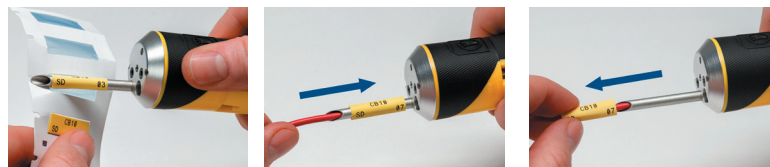

Pick

Slip

Apply

All part numbers above are compatible with BradyPrinter i3300 and BBP®33. Parts may also be compatible with BradyPrinter S3000, BradyPrinter S3100, BBP®30, BBP®31, BBP®35 and BBP®37 printers. Visit [BradyID.com](http://BradyID.com) to confirm compatibility.

## PermaSleeve® HT High-Temperature PVDF Wire Marking Sleeves (B-345)

High temperature, low outgassing. 2:1 Shrink ratio.

- A 2:1 shrink ratio wire marker sleeve specifically designed for high-temperature and low-vacuum outgassing applications
- Made from irradiated high-temp polyvinylidene fluoride (PVDF) heat-shrink tubing
- Fade-resistant and flame-retardant
- Meets the following industry specifications:
  - NASA SP-R-0022A Outgassing Performance
  - SAE-AS-81531
  - Tested per ASTM E162, ASTM E662 and MIL-STD-202

Service temp: -67° to 437° F Agency approvals: **RoHS**




Figure 20



| Diagram  | Catalog #         | Material | Color | For Wire Gauge (approx.) | Range For Wire Diameters Inch (mm) | Supplied Diameter B Inch (mm) | Recovered Diameter Inch (mm) | Recovered Wall Thickness Inch (mm) | Sleeves Per Row | Sleeves Per Roll | Rec. Ribbon  |
|--|-------------------|----------|-------|--------------------------|------------------------------------|-------------------------------|------------------------------|------------------------------------|-----------------|------------------|--------------|
| <b>3:1 Shrink ratio double-side printable, 2 in. sleeve width (dimension A):</b> |                   |          |       |                          |                                    |                               |                              |                                    |                 |                  |              |
| Fig. 20  | B33D-94-2-345     | B-345    | White | 26 to 20                 | 0.031 (0.8) - 0.080 (2.0)          | 0.094 (2.4)                   | 0.031 (0.8)                  | .015 (0.4) +/- .003 (0.07)         | 1               | 1000             | B30-R6000    |
| Fig. 20  | B33D-94-2-345BK   | B-345    | Black | 26 to 20                 | 0.031 (0.8) - 0.080 (2.0)          | 0.094 (2.4)                   | 0.031 (0.8)                  | .015 (0.4) +/- .003 (0.07)         | 1               | 1000             | B30-R4400-WT |
| <b>2:1 Shrink ratio double-side printable, 2 in. sleeve width (dimension A):</b> |                   |          |       |                          |                                    |                               |                              |                                    |                 |                  |              |
| Fig. 20  | B33D-125-2-345    | B-345    | White | 20 to 16                 | 0.063 (1.6) - 0.110 (2.8)          | 0.125 (3.2)                   | 0.062 (1.6)                  | .015 (0.4) +/- .003 (0.07)         | 1               | 1000             | B30-R6000    |
| Fig. 20  | B33D-187-2-345    | B-345    | White | 16 to 10                 | 0.094 (2.4) - 0.150 (3.8)          | 0.187 (4.7)                   | 0.093 (2.4)                  | .015 (0.4) +/- .003 (0.07)         | 1               | 750              | B30-R6000    |
| Fig. 20  | B33D-250-2-345    | B-345    | White | 12 to 8                  | 0.125 (3.2) - 0.215 (5.5)          | 0.250 (6.4)                   | 0.125 (3.2)                  | .015 (0.4) +/- .003 (0.07)         | 1               | 500              | B30-R6000    |
| Fig. 20  | B33D-375-2-345    | B-345    | White | 8 to 4                   | 0.187 (3.2) - 0.320 (8.1)          | 0.375 (9.5)                   | 0.187 (4.7)                  | .015 (0.4) +/- .003 (0.07)         | 1               | 500              | B30-R6000    |
| Fig. 20  | B33D-500-2-345    | B-345    | White | 6 to 1                   | 0.250 (6.4) - 0.450 (11.4)         | 0.500 (12.7)                  | 0.250 (6.4)                  | .015 (0.4) +/- .003 (0.07)         | 1               | 350              | B30-R6000    |
| Fig. 20  | B33D-750-2-345    | B-345    | White | 2 to 4/0                 | 0.375 (9.5) - 0.700 (17.8)         | 0.750 (19.0)                  | 0.375 (9.5)                  | .015 (0.4) +/- .003 (0.07)         | 1               | 250              | B30-R6000    |
| Fig. 20  | B33D-1000-2-345   | B-345    | White | 2/0 to 0.950 dia         | 0.450 (11.4) - 0.950 (24.1)        | 1.000 (25.4)                  | 0.500 (12.7)                 | .017 (0.4) +/- .004 (0.1)          | 1               | 250              | B30-R6000    |
| Fig. 20  | B33D-1500-2-345   | B-345    | White | N/A                      | 0.750 (19.1) - 1.400 (35.6)        | 1.500 (38.1)                  | 0.750 (19.1)                 | .024 (0.6) +/- .004 (0.1)          | 1               | 150              | B30-R6000    |
| Fig. 20  | B33D-125-2-345BK  | B-345    | Black | 20 to 16                 | 0.063 (1.6) - 0.110 (2.8)          | 0.125 (3.2)                   | 0.062 (1.6)                  | .015 (0.4) +/- .003 (0.07)         | 1               | 1000             | B30-R4400-WT |
| Fig. 20  | B33D-187-2-345BK  | B-345    | Black | 16 to 10                 | 0.094 (2.4) - 0.150 (3.8)          | 0.187 (4.7)                   | 0.093 (2.4)                  | .015 (0.4) +/- .003 (0.07)         | 1               | 750              | B30-R4400-WT |
| Fig. 20  | B33D-250-2-345BK  | B-345    | Black | 12 to 8                  | 0.125 (3.2) - 0.215 (5.5)          | 0.250 (6.4)                   | 0.125 (3.2)                  | .015 (0.4) +/- .003 (0.07)         | 1               | 500              | B30-R4400-WT |
| Fig. 20  | B33D-375-2-345BK  | B-345    | Black | 8 to 4                   | 0.187 (3.2) - 0.320 (8.1)          | 0.375 (9.5)                   | 0.187 (4.7)                  | .015 (0.4) +/- .003 (0.07)         | 1               | 500              | B30-R4400-WT |
| Fig. 20  | B33D-500-2-345BK  | B-345    | Black | 6 to 1                   | 0.250 (6.4) - 0.450 (11.4)         | 0.500 (12.7)                  | 0.250 (6.4)                  | .015 (0.4) +/- .003 (0.07)         | 1               | 350              | B30-R4400-WT |
| Fig. 20  | B33D-750-2-345BK  | B-345    | Black | 3 to 4/0                 | 0.375 (9.5) - 0.700 (17.8)         | 0.750 (19.0)                  | 0.375 (9.5)                  | .015 (0.4) +/- .003 (0.07)         | 1               | 250              | B30-R4400-WT |
| Fig. 20  | B33D-1000-2-345BK | B-345    | Black | 2/0 to 0.950 dia         | 0.450 (11.4) - 0.950 (24.1)        | 1.000 (25.4)                  | 0.500 (12.7)                 | .017 (0.4) +/- .004 (0.1)          | 1               | 250              | B30-R4400-WT |
| Fig. 20  | B33D-1500-2-345BK | B-345    | Black | N/A                      | 0.750 (19.1) - 1.400 (35.6)        | 1.500 (38.1)                  | 0.750 (19.1)                 | .024 (0.6) +/- .004 (0.1)          | 1               | 150              | B30-R4400-WT |

All part numbers above are compatible with BradyPrinter i3300 and BBP®33. Parts may also be compatible with BradyPrinter S3000, BradyPrinter S3100, BBP®30, BBP®31, BBP®35 and BBP®37 printers. Visit BradyID.com to confirm compatibility.

## PermaSleeve® HX Polyolefin Wire Marking Sleeves (B-7642)

Military / Industrial Grade. 2:1 Shrink ratio.

- Flame retardant and high-temp rated but not as high temp as B-345 "HT" sleeves
- Meets the following industry specifications:
  - SAE-AS23053/5 and SAE-AS-81531
  - Tested per ASTM E162, ASTM E662 and MIL-STD-202

Service temp: -40° to 248° F (short burst max temp: 5 min. at 464° F, 24 hrs. at 320° F)  
Agency approval: **RoHS**




Figure 20



| Diagram  | Catalog #        | Material | Color | For Wire Gauge (approx.) | Range For Wire Diameters Inch (mm) | Supplied Diameter B Inch (mm) | Recovered Diameter Inch (mm) | Recovered Wall Thickness Inch (mm) | Sleeves Per Row | Per Roll | Rec. Ribbon |
|--|------------------|----------|-------|--------------------------|------------------------------------|-------------------------------|------------------------------|------------------------------------|-----------------|----------|-------------|
| <b>2:1 Shrink ratio single-side printable, 2 in. sleeve width (dimension A):</b> |                  |          |       |                          |                                    |                               |                              |                                    |                 |          |             |
| Fig. 20  | B33-94-2-7642    | B-7642   | White | 24 to 20                 | 0.047 (1.2) - 0.080 (2.0)          | 0.094 (2.4)                   | 0.047 (1.2)                  | .020 (0.5) +/- .003 (0.07)         | 1               | 500      | B30-R4300   |
| Fig. 20  | B33-125-2-7642   | B-7642   | White | 20 to 16                 | 0.062 (1.6) - 0.110 (2.8)          | 0.125 (3.2)                   | 0.063 (1.6)                  | .020 (0.5) +/- .003 (0.07)         | 1               | 500      | B30-R4300   |
| Fig. 20  | B33-187-2-7642   | B-7642   | White | 16 to 10                 | 0.094 (2.4) - 0.151 (3.8)          | 0.187 (4.8)                   | 0.094 (2.4)                  | .020 (0.5) +/- .003 (0.07)         | 1               | 450      | B30-R4300   |
| Fig. 20  | B33-250-2-7642   | B-7642   | White | 12 to 8                  | 0.125 (3.2) - 0.215 (5.5)          | 0.250 (6.4)                   | 0.126 (3.2)                  | .025 (0.6) +/- .003 (0.07)         | 1               | 400      | B30-R4300   |
| Fig. 20  | B33-375-2-7642   | B-7642   | White | 8 to 4                   | 0.188 (4.8) - 0.320 (8.1)          | 0.375 (9.5)                   | 0.189 (4.8)                  | .025 (0.6) +/- .003 (0.07)         | 1               | 250      | B30-R4300   |
| Fig. 20  | B33-500-2-7642   | B-7642   | White | 6 to 1                   | 0.250 (6.4) - 0.450 (11.4)         | 0.500 (12.7)                  | 0.252 (6.4)                  | .025 (0.6) +/- .003 (0.07)         | 1               | 225      | B30-R4300   |
| Fig. 20  | B33-750-2-7642   | B-7642   | White | 2 to 4/0                 | 0.375 (9.5) - 0.700 (17.8)         | 0.750 (19.0)                  | 0.374 (9.5)                  | .030 (0.8) +/- .003 (0.07)         | 1               | 150      | B30-R4300   |
| Fig. 20  | B33-1000-2-7642  | B-7642   | White | 2/0 to 0.950 dia         | 0.450 (11.4) - 0.950 (24.1)        | 1.000 (25.4)                  | 0.500 (12.7)                 | .035 (0.9) +/- .005 (0.1)          | 1               | 150      | B30-R4300   |
| Fig. 20  | B33-1500-2-7642  | B-7642   | White | N/A                      | 0.750 (19.0) - 1.400 (35.6)        | 1.500 (38.1)                  | 0.752 (19.1)                 | .040 (1.0) +/- .006 (0.2)          | 1               | 50       | B30-R4300   |
| Fig. 20  | B33-2000-2-7642  | B-7642   | White | N/A                      | 1.000 (25.4) - 1.900 (48.3)        | 2.000 (50.8)                  | 1.000 (25.4)                 | .045 (1.1) +/- .007 (0.2)          | 1               | 50       | B30-R4300   |
| <b>2:1 Shrink ratio double-side printable, 2 in. sleeve width (dimension A):</b> |                  |          |       |                          |                                    |                               |                              |                                    |                 |          |             |
| Fig. 20  | B33D-94-2-7642   | B-7642   | White | 24 to 20                 | 0.047 (1.2) - 0.080 (2.0)          | 0.094 (2.4)                   | 0.047 (1.2)                  | .020 (0.5) +/- .003 (0.07)         | 1               | 500      | B30-R4300   |
| Fig. 20  | B33D-125-2-7642  | B-7642   | White | 20 to 16                 | 0.062 (1.6) - 0.110 (2.8)          | 0.125 (3.2)                   | 0.063 (1.6)                  | .020 (0.5) +/- .003 (0.07)         | 1               | 500      | B30-R4300   |
| Fig. 20  | B33D-187-2-7642  | B-7642   | White | 16 to 10                 | 0.094 (2.4) - 0.151 (3.8)          | 0.187 (4.8)                   | 0.094 (2.4)                  | .020 (0.5) +/- .003 (0.07)         | 1               | 450      | B30-R4300   |
| Fig. 20  | B33D-250-2-7642  | B-7642   | White | 12 to 8                  | 0.125 (3.2) - 0.215 (5.5)          | 0.250 (6.4)                   | 0.126 (3.2)                  | .025 (0.6) +/- .003 (0.07)         | 1               | 400      | B30-R4300   |
| Fig. 20  | B33D-375-2-7642  | B-7642   | White | 8 to 4                   | 0.188 (4.8) - 0.320 (8.1)          | 0.375 (9.5)                   | 0.189 (4.8)                  | .025 (0.6) +/- .003 (0.07)         | 1               | 250      | B30-R4300   |
| Fig. 20  | B33D-500-2-7642  | B-7642   | White | 6 to 1                   | 0.250 (6.4) - 0.450 (11.4)         | 0.500 (12.7)                  | 0.252 (6.4)                  | .025 (0.6) +/- .003 (0.07)         | 1               | 225      | B30-R4300   |
| Fig. 20  | B33D-750-2-7642  | B-7642   | White | 2 to 4/0                 | 0.375 (9.5) - 0.700 (17.8)         | 0.750 (19.0)                  | 0.374 (9.5)                  | .030 (0.8) +/- .003 (0.07)         | 1               | 150      | B30-R4300   |
| Fig. 20  | B33D-1000-2-7642 | B-7642   | White | 2/0 to 0.950 dia         | 0.450 (11.4) - 0.950 (24.1)        | 1.000 (25.4)                  | 0.500 (12.7)                 | .035 (0.9) +/- .005 (0.1)          | 1               | 150      | B30-R4300   |
| Fig. 20  | B33D-1500-2-7642 | B-7642   | White | N/A                      | 0.750 (19.0) - 1.400 (35.6)        | 1.500 (38.1)                  | 0.752 (19.1)                 | .040 (1.0) +/- .006 (0.2)          | 1               | 50       | B30-R4300   |
| Fig. 20  | B33D-2000-2-7642 | B-7642   | White | N/A                      | 1.000 (25.4) - 1.900 (48.3)        | 2.000 (50.8)                  | 1.000 (25.4)                 | .045 (1.1) +/- .007 (0.2)          | 1               | 50       | B30-R4300   |

## PermaSleeve® LSZH Low Smoke Zero Halogen Polyolefin Wire Marking Sleeves (B-7641)

Military / Industrial Grade. 2:1 Shrink ratio.

- Low halogen wire marking sleeves offer outstanding fire safety properties and minimal smoke emission
- Meets the following industry specifications:
  - SAE-AS-81531 and EN45545-2
  - Tested per ASTM E162, ASTM E662 and MIL-STD-202

Service temp: -22° to 221° F Agency approval: **RoHS**




Figure 20



| Diagram  | Catalog #         | Material | Color  | Range For Wire Diameters Inch (mm) | Supplied Diameter B Inch (mm) | Recovered Diameter Inch (mm) | Recovered Wall Thickness Inch (mm) | Sleeves Per Row | Per Roll | Rec. Ribbon |
|--|-------------------|----------|--------|------------------------------------|-------------------------------|------------------------------|------------------------------------|-----------------|----------|-------------|
| <b>2:1 Shrink ratio double-side printable, 2 in. sleeve width (dimension A):</b> |                   |          |        |                                    |                               |                              |                                    |                 |          |             |
| Fig. 20  | B33D-94-2-7641    | B-7641   | White  | 0.047 (1.2) - 0.080 (2.0)          | 0.094 (2.4)                   | 0.047 (1.2)                  | .020 (0.5) +/- .003 (0.07)         | 1               | 1000     | B30-R6000   |
| Fig. 20  | B33D-125-2-7641   | B-7641   | White  | 0.062 (1.6) - 0.110 (2.8)          | 0.125 (3.2)                   | 0.063 (1.6)                  | .020 (0.5) +/- .003 (0.07)         | 1               | 1000     | B30-R6000   |
| Fig. 20  | B33D-187-2-7641   | B-7641   | White  | 0.094 (2.4) - 0.151 (3.8)          | 0.187 (4.8)                   | 0.094 (2.4)                  | .020 (0.5) +/- .003 (0.07)         | 1               | 450      | B30-R6000   |
| Fig. 20  | B33D-250-2-7641   | B-7641   | White  | 0.125 (3.2) - 0.215 (5.5)          | 0.250 (6.4)                   | 0.126 (3.2)                  | .025 (0.6) +/- .003 (0.07)         | 1               | 500      | B30-R6000   |
| Fig. 20  | B33D-375-2-7641   | B-7641   | White  | 0.188 (4.8) - 0.320 (8.1)          | 0.375 (9.5)                   | 0.189 (4.8)                  | .025 (0.6) +/- .003 (0.07)         | 1               | 500      | B30-R6000   |
| Fig. 20  | B33D-500-2-7641   | B-7641   | White  | 0.250 (6.4) - 0.450 (11.4)         | 0.500 (12.7)                  | 0.252 (6.4)                  | .025 (0.6) +/- .003 (0.07)         | 1               | 225      | B30-R6000   |
| Fig. 20  | B33D-750-2-7641   | B-7641   | White  | 0.375 (9.5) - 0.700 (17.8)         | 0.750 (19.0)                  | 0.374 (9.5)                  | .030 (0.8) +/- .003 (0.07)         | 1               | 150      | B30-R6000   |
| Fig. 20  | B33D-1000-2-7641  | B-7641   | White  | 0.450 (11.4) - 0.950 (24.1)        | 1.000 (25.4)                  | 0.500 (12.7)                 | .035 (0.9) +/- .005 (0.1)          | 1               | 150      | B30-R6000   |
| Fig. 20  | B33D-1500-2-7641  | B-7641   | White  | 0.750 (19.0) - 1.400 (35.6)        | 1.500 (38.1)                  | 0.752 (19.1)                 | .040 (1.0) +/- .006 (0.2)          | 1               | 50       | B30-R6000   |
| Fig. 20  | B33D-94-2-7641Y   | B-7641   | Yellow | 0.047 (1.2) - 0.080 (2.0)          | 0.094 (2.4)                   | 0.047 (1.2)                  | .020 (0.5) +/- .003 (0.07)         | 1               | 1000     | B30-R6000   |
| Fig. 20  | B33D-125-2-7641Y  | B-7641   | Yellow | 0.062 (1.6) - 0.110 (2.8)          | 0.125 (3.2)                   | 0.063 (1.6)                  | .020 (0.5) +/- .003 (0.07)         | 1               | 1000     | B30-R6000   |
| Fig. 20  | B33D-187-2-7641Y  | B-7641   | Yellow | 0.094 (2.4) - 0.151 (3.8)          | 0.187 (4.8)                   | 0.094 (2.4)                  | .020 (0.5) +/- .003 (0.07)         | 1               | 450      | B30-R6000   |
| Fig. 20  | B33D-250-2-7641Y  | B-7641   | Yellow | 0.125 (3.2) - 0.215 (5.5)          | 0.250 (6.4)                   | 0.126 (3.2)                  | .025 (0.6) +/- .003 (0.07)         | 1               | 500      | B30-R6000   |
| Fig. 20  | B33D-375-2-7641Y  | B-7641   | Yellow | 0.188 (4.8) - 0.320 (8.1)          | 0.375 (9.5)                   | 0.189 (4.8)                  | .025 (0.6) +/- .003 (0.07)         | 1               | 500      | B30-R6000   |
| Fig. 20  | B33D-500-2-7641Y  | B-7641   | Yellow | 0.250 (6.4) - 0.450 (11.4)         | 0.500 (12.7)                  | 0.252 (6.4)                  | .025 (0.6) +/- .003 (0.07)         | 1               | 225      | B30-R6000   |
| Fig. 20  | B33D-750-2-7641Y  | B-7641   | Yellow | 0.375 (9.5) - 0.700 (17.8)         | 0.750 (19.0)                  | 0.374 (9.5)                  | .030 (0.8) +/- .003 (0.07)         | 1               | 150      | B30-R6000   |
| Fig. 20  | B33D-1000-2-7641Y | B-7641   | Yellow | 0.450 (11.4) - 0.950 (24.1)        | 1.000 (25.4)                  | 0.500 (12.7)                 | .035 (0.9) +/- .005 (0.1)          | 1               | 150      | B30-R6000   |
| Fig. 20  | B33D-1500-2-7641Y | B-7641   | Yellow | 0.750 (19.0) - 1.400 (35.6)        | 1.500 (38.1)                  | 0.752 (19.1)                 | .040 (1.0) +/- .006 (0.2)          | 1               | 50       | B30-R6000   |

All part numbers above are compatible with BradyPrinter i3300 and BBP®33. Parts may also be compatible with BradyPrinter S3000, BradyPrinter S3100, BBP®30, BBP®31, BBP®35 and BBP®37 printers. Visit BradyID.com to confirm compatibility.



## PermaSleeve® FR Fluid Resistant Wire Marking Sleeves (B-344) Military / Industrial Grade. 3:1 Shrink ratio.

- Designed for labeling wires in applications where they will be exposed to fuels, lubricants and harsh chemicals such as in the installation of hydrogen fuel cells in aerospace
- Resistant to harsh chemicals including JP8 Jet Fuel, Skydrol® and DOT 3 brake fluid
- Meets the following industry specifications:
  - SAE-AS23053/5
  - Tested per: ASTM E162, ASTM E662, MIL-STD-202G

Service temp: -94° to 267° F  
Agency approvals: **RohS**





Figure 20



| Diagram  | Catalog #           | Material | Color  | For Wire Gauge (approx.) | Range For Wire Diameters Inch (mm) | Supplied Diameter B Inch (mm) | Recovered Diameter Inch (mm) | Recovered Wall Thickness Inch (mm) | Sleeves Per Row | Sleeves Per Roll | Rec. Ribbon  |
|--|---------------------|----------|--------|--------------------------|------------------------------------|-------------------------------|------------------------------|------------------------------------|-----------------|------------------|--------------|
| <b>3:1 Shrink ratio double-side printable, 2 in. sleeve width (dimension A):</b> |                     |          |        |                          |                                    |                               |                              |                                    |                 |                  |              |
| Fig. 20  | * B33D-94-2-344     | B-344    | White  | 28 to 20                 | 0.023 (0.6) - 0.080 (2.0)          | 0.094 (2.4)                   | 0.024 (0.6)                  | 0.024 (0.6) +/- 0.003 (0.1)        | 1               | 1000             | B30-R6600    |
| Fig. 20  | * B33D-125-2-344    | B-344    | White  | 22 to 16                 | 0.046 (1.2) - 0.111 (2.8)          | 0.125 (3.1)                   | 0.047 (1.2)                  | 0.020 (0.5) +/- 0.003 (0.1)        | 1               | 1000             | B30-R6600    |
| Fig. 20  | * B33D-187-2-344    | B-344    | White  | 20 to 10                 | 0.062 (1.6) - 0.15 (3.81)          | 0.187 (4.8)                   | 0.062 (1.6)                  | 0.020 (0.5) +/- 0.003 (0.1)        | 1               | 750              | B30-R6600    |
| Fig. 20  | * B33D-250-2-344    | B-344    | White  | 16 to 8                  | 0.094 (2.4) - 0.215 (5.5)          | 0.250 (6.35)                  | 0.093 (2.4)                  | 0.025 (0.6) +/- 0.003 (0.1)        | 1               | 500              | B30-R6600    |
| Fig. 20  | * B33D-375-2-344    | B-344    | White  | 12 to 4                  | 0.125 (3.2) - 0.320 (8.1)          | 0.375 (9.5)                   | 0.125 (3.2)                  | 0.025 (0.6) +/- 0.003 (0.1)        | 1               | 500              | B30-R6600    |
| Fig. 20  | * B33D-500-2-344    | B-344    | White  | 8 to 1                   | 0.187 (4.8) - 0.450 (11.4)         | 0.500 (12.7)                  | 0.119 (3.0)                  | 0.025 (0.6) +/- 0.003 (0.1)        | 1               | 350              | B30-R6600    |
| Fig. 20  | * B33D-750-2-344    | B-344    | White  | 6 to 4/0                 | 0.250 (6.4) - 0.700 (17.8)         | 0.750 (19.05)                 | 0.250 (6.35)                 | 0.025 (0.6) +/- 0.003 (0.1)        | 1               | 250              | B30-R6600    |
| Fig. 20  | * B33D-1000-2-344   | B-344    | White  | 2 to 0.950 dia           | 0.333 (8.5) - 0.950 (24.1)         | 1.000 (25.4)                  | 0.375 (9.5)                  | 0.036 (0.9) +/- 0.003 (0.1)        | 1               | 250              | B30-R6600    |
| Fig. 20  | * B33D-1500-2-344   | B-344    | White  | n/a                      | 0.500 (12.7) - 1.400 (35.6)        | 1.500 (38.1)                  | 0.500 (12.7)                 | 0.035 (0.9) +/- 0.003 (0.1)        | 1               | 150              | B30-R6600    |
| Fig. 20  | * B33D-94-2-344YL   | B-344    | Yellow | 28 to 20                 | 0.023 (0.6) - 0.080 (2.0)          | 0.094 (2.4)                   | 0.024 (0.6)                  | 0.024 (0.6) +/- 0.003 (0.1)        | 1               | 1000             | B30-R6600    |
| Fig. 20  | * B33D-125-2-344YL  | B-344    | Yellow | 22 to 16                 | 0.046 (1.2) - 0.111 (2.8)          | 0.125 (3.1)                   | 0.047 (1.2)                  | 0.020 (0.5) +/- 0.003 (0.1)        | 1               | 1000             | B30-R6600    |
| Fig. 20  | * B33D-187-2-344YL  | B-344    | Yellow | 20 to 10                 | 0.062 (1.6) - 0.15 (3.81)          | 0.187 (4.8)                   | 0.062 (1.6)                  | 0.020 (0.5) +/- 0.003 (0.1)        | 1               | 750              | B30-R6600    |
| Fig. 20  | * B33D-250-2-344YL  | B-344    | Yellow | 16 to 8                  | 0.094 (2.4) - 0.215 (5.5)          | 0.250 (6.35)                  | 0.093 (2.4)                  | 0.025 (0.6) +/- 0.003 (0.1)        | 1               | 500              | B30-R6600    |
| Fig. 20  | * B33D-375-2-344YL  | B-344    | Yellow | 12 to 4                  | 0.125 (3.2) - 0.320 (8.1)          | 0.375 (9.5)                   | 0.125 (3.2)                  | 0.025 (0.6) +/- 0.003 (0.1)        | 1               | 500              | B30-R6600    |
| Fig. 20  | * B33D-500-2-344YL  | B-344    | Yellow | 8 to 1                   | 0.187 (4.8) - 0.450 (11.4)         | 0.500 (12.7)                  | 0.119 (3.0)                  | 0.025 (0.6) +/- 0.003 (0.1)        | 1               | 350              | B30-R6600    |
| Fig. 20  | * B33D-750-2-344YL  | B-344    | Yellow | 6 to 4/0                 | 0.250 (6.4) - 0.700 (17.8)         | 0.750 (19.05)                 | 0.250 (6.35)                 | 0.025 (0.6) +/- 0.003 (0.1)        | 1               | 250              | B30-R6600    |
| Fig. 20  | * B33D-1000-2-344YL | B-344    | Yellow | 2 to 0.950 dia           | 0.333 (8.5) - 0.950 (24.1)         | 1.000 (25.4)                  | 0.375 (9.5)                  | 0.036 (0.9) +/- 0.003 (0.1)        | 1               | 250              | B30-R6600    |
| Fig. 20  | * B33D-1500-2-344YL | B-344    | Yellow | n/a                      | 0.500 (12.7) - 1.400 (35.6)        | 1.500 (38.1)                  | 0.500 (12.7)                 | 0.035 (0.9) +/- 0.003 (0.1)        | 1               | 150              | B30-R6600    |
| Fig. 20  | * B33D-94-2-344BK   | B-344    | Black  | 28 to 20                 | 0.023 (0.6) - 0.080 (2.0)          | 0.094 (2.4)                   | 0.024 (0.6)                  | 0.024 (0.6) +/- 0.003 (0.1)        | 1               | 1000             | B30-R6700-WT |
| Fig. 20  | * B33D-125-2-344BK  | B-344    | Black  | 22 to 16                 | 0.046 (1.2) - 0.111 (2.8)          | 0.125 (3.1)                   | 0.047 (1.2)                  | 0.020 (0.5) +/- 0.003 (0.1)        | 1               | 1000             | B30-R6700-WT |
| Fig. 20  | * B33D-187-2-344BK  | B-344    | Black  | 20 to 10                 | 0.062 (1.6) - 0.15 (3.81)          | 0.187 (4.8)                   | 0.062 (1.6)                  | 0.020 (0.5) +/- 0.003 (0.1)        | 1               | 750              | B30-R6700-WT |
| Fig. 20  | * B33D-250-2-344BK  | B-344    | Black  | 16 to 8                  | 0.094 (2.4) - 0.215 (5.5)          | 0.250 (6.35)                  | 0.093 (2.4)                  | 0.025 (0.6) +/- 0.003 (0.1)        | 1               | 500              | B30-R6700-WT |
| Fig. 20  | * B33D-375-2-344BK  | B-344    | Black  | 12 to 4                  | 0.125 (3.2) - 0.320 (8.1)          | 0.375 (9.5)                   | 0.125 (3.2)                  | 0.025 (0.6) +/- 0.003 (0.1)        | 1               | 500              | B30-R6700-WT |
| Fig. 20  | * B33D-500-2-344BK  | B-344    | Black  | 8 to 1                   | 0.187 (4.8) - 0.450 (11.4)         | 0.500 (12.7)                  | 0.119 (3.0)                  | 0.025 (0.6) +/- 0.003 (0.1)        | 1               | 350              | B30-R6700-WT |
| Fig. 20  | * B33D-750-2-344BK  | B-344    | Black  | 6 to 4/0                 | 0.250 (6.4) - 0.700 (17.8)         | 0.750 (19.05)                 | 0.250 (6.35)                 | 0.025 (0.6) +/- 0.003 (0.1)        | 1               | 250              | B30-R6700-WT |
| Fig. 20  | * B33D-1000-2-344BK | B-344    | Black  | 2 to 0.950 dia           | 0.333 (8.5) - 0.950 (24.1)         | 1.000 (25.4)                  | 0.375 (9.5)                  | 0.036 (0.9) +/- 0.003 (0.1)        | 1               | 250              | B30-R6700-WT |
| Fig. 20  | * B33D-1500-2-344BK | B-344    | Black  | n/a                      | 0.500 (12.7) - 1.400 (35.6)        | 1.500 (38.1)                  | 0.500 (12.7)                 | 0.035 (0.9) +/- 0.003 (0.1)        | 1               | 150              | B30-R6700-WT |

\* **WARNING:** Cancer [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

Skydrol® is a registered trademark of Monsanto Chemical Company

All part numbers above are compatible with BradyPrinter i3300 and BBP®33. Parts may also be compatible with BradyPrinter S3000, BradyPrinter S3100, BBP®30, BBP®31, BBP®35 and BBP®37 printers. Visit [BradyID.com](http://BradyID.com) to confirm compatibility.

## Pre-Printed Pre-Cut Blank Sign Headers (B-595)

- Allows printer to create multicolor signs fast in a single print pass
- Headers meet NFPA 70E, OSHA 1910.145 and ASME / ANSI Z535 standards
- Indoor / outdoor grade material conforms to rough, highly textured and difficult-to-adhere-to surfaces

Service temp: -40° to 180° F  
 Application temp: 0° to 180° F  
 Average outdoor durability: 8-10 years  
 Agency approvals: RoHS




Figure 70



| Diagram | Catalog #          | B#    | Material | Header | Label Height A Inch (mm) | Label Width B Inch (mm) | Labels Per Row | Labels Per Roll | Rec. Ribbon |
|---------|--------------------|-------|----------|--------|--------------------------|-------------------------|----------------|-----------------|-------------|
| Fig. 70 | B30-241-595-OSHADA | B-595 | Vinyl    |        | 2.250 (57.5)             | 3.000 (76.2)            | 1              | 300             | B30-R10000  |
| Fig. 70 | B30-25-595-OSHADA  | B-595 | Vinyl    |        | 4.000 (101.6)            | 6.000 (152.4)           | 1              | 175             | B30-R10000  |
| Fig. 70 | B30-241-595-OSHACA | B-595 | Vinyl    |        | 2.250 (57.5)             | 3.000 (76.2)            | 1              | 300             | B30-R10000  |
| Fig. 70 | B30-25-595-OSHACA  | B-595 | Vinyl    |        | 4.000 (101.6)            | 6.000 (152.4)           | 1              | 175             | B30-R10000  |
| Fig. 70 | B30-241-595-ANSICA | B-595 | Vinyl    |        | 2.250 (57.5)             | 3.000 (76.2)            | 1              | 300             | B30-R10000  |
| Fig. 70 | B30-25-595-ANSICA  | B-595 | Vinyl    |        | 4.000 (101.6)            | 6.000 (152.4)           | 1              | 175             | B30-R10000  |
| Fig. 70 | B30-241-595-ANSIDA | B-595 | Vinyl    |        | 2.250 (57.5)             | 3.000 (76.2)            | 1              | 300             | B30-R10000  |
| Fig. 70 | B30-25-595-ANSIDA  | B-595 | Vinyl    |        | 4.000 (101.6)            | 6.000 (152.4)           | 1              | 175             | B30-R10000  |
| Fig. 70 | B30-241-595-ANSIWA | B-595 | Vinyl    |        | 2.250 (57.5)             | 3.000 (76.2)            | 1              | 300             | B30-R10000  |
| Fig. 70 | B30-25-595-ANSIWA  | B-595 | Vinyl    |        | 4.000 (101.6)            | 6.000 (152.4)           | 1              | 175             | B30-R10000  |
| Fig. 70 | B30-241-595-ANSINO | B-595 | Vinyl    |        | 2.250 (57.5)             | 3.000 (76.2)            | 1              | 300             | B30-R10000  |
| Fig. 70 | B30-25-595-ANSINO  | B-595 | Vinyl    |        | 4.000 (101.6)            | 6.000 (152.4)           | 1              | 175             | B30-R10000  |
| Fig. 70 | B30-25-595-PREC    | B-595 | Vinyl    |        | 4.000 (101.6)            | 6.000 (152.4)           | 1              | 175             | B30-R10000  |
| Fig. 70 | B30-25-595-PEL     | B-595 | Vinyl    |        | 4.000 (101.6)            | 6.000 (152.4)           | 1              | 175             | B30-R10000  |
| Fig. 70 | B30-242-595-BLNKWT | B-595 | Vinyl    |        | 1.125 (28.6) *           | 2.750 (69.8)            | 300            | B30-R10000      | B30-R10000  |
| Fig. 70 | B30-241-595-BLNKWT | B-595 | Vinyl    |        | 2.250 (57.5)             | 3.000 (76.2)            | 300            | B30-R10000      | B30-R10000  |
| Fig. 70 | B30-219-595-BLNKWT | B-595 | Vinyl    |        | 2.250 (57.5) *           | 3.750 (95.3)            | 250            | B30-R10000      | B30-R10000  |
| Fig. 70 | B30-25-595-BLNKWT  | B-595 | Vinyl    |        | 4.000 (101.6)            | 6.000 (152.4)           | 175            | B30-R10000      | B30-R10000  |
| Fig. 70 | B30-241-595-BLNKYL | B-595 | Vinyl    |        | 2.250 (57.5)             | 3.000 (76.2)            | 1              | 300             | B30-R10000  |
| Fig. 70 | B30-25-595-BLNKYL  | B-595 | Vinyl    |        | 4.000 (101.6)            | 6.000 (152.4)           | 1              | 175             | B30-R10000  |

## Non-Adhesive Tags (B-551)

- Non-adhesive semi-rigid card stock in pre-cut and continuous styles
- Tags are pre-cut with hole or easy to hole punch, are micro-perforated between tags to separate cleanly and some feature chamfered corners
- Snap-in plastic grommets available for extra strength around mounting hole (Catalog #20596, 100/bag)

Service temp: -40° to 193° F  
 Average outdoor durability: Up to 2 years




Figure 3




Figure 69



| Diagram | Catalog #          | B#    | Header | Tag Width A Inch (mm) | Tag Height B Inch (mm) | Tags Per Row   | Tags Per Roll | Rec. Ribbon |
|---------|--------------------|-------|--------|-----------------------|------------------------|----------------|---------------|-------------|
| Fig. 69 | B30-255-551-ANSIDA | B-551 |        | 3.250 (82.6)          | 5.750 (146.1)          | 1              | 100           | B30-R10000  |
| Fig. 69 | B30-255-551-OSHADA | B-551 |        | 3.250 (82.6)          | 5.750 (146.1)          | 1              | 100           | B30-R10000  |
| Fig. 69 | B30-255-551-ANSICA | B-551 |        | 3.250 (82.6)          | 5.750 (146.1)          | 1              | 100           | B30-R10000  |
| Fig. 69 | B30-255-551-WHT    | B-551 |        | 3.250 (82.6)          | 5.750 (146.1)          | 1              | 100           | B30-R10000  |
| Fig. 3  | B30C-2500-551-WT   | B-551 |        | 2.500 (63.5)          | 50ft. (15.2m)          | 1 roll (cont.) |               | B30-R10000  |
| Fig. 3  | B30C-3250-551-WT   | B-551 |        | 3.250 (82.6)          | 50ft. (15.2m)          | 1 roll (cont.) |               | B30-R10000  |
| Fig. 3  | B30C-4250-551-WT   | B-551 |        | 4.250 (107.9)         | 50ft. (15.2m)          | 1 roll (cont.) |               | B30-R10000  |

All part numbers above are compatible with BradyPrinter i3300 and BBP®33. Parts may also be compatible with BradyPrinter S3000, BradyPrinter S3100, BBP®30, BBP®31, BBP®35 and BBP®37 printers. Visit BradyID.com to confirm compatibility.

## Indoor and Outdoor Vinyl (B-595)

- For general facility and safety identification
- Durable, low-shrink vinyl with our most aggressive adhesive
- Conforms to irregular, curved, rough and highly textured surfaces (painted cinder blocks, uneven wood, textured plastics, paper-jacketed pipes, powder-coated surfaces)
- Adheres to “difficult” low-surface energy items (PVC piping, blow-molded equipment cases, ABS plastics, recycled plastics)

Service temp: -40° to 180° F  
 Application temp: 0° to 180° F  
 Average outdoor durability: 8-10 years  
 Agency approvals: RoHS




Figure 3



**Facility and Safety Applications**

- Lean / 5S Labels
- Pipe Markers
- Safety and Warning Labels
- Equipment and Panel Labels
- Arc Flash and Chemical Labels
- And more

| Diagram | Catalog #        | B#    | Color  | Label Width A<br>Inch (mm) | Roll Length B<br>Feet (m) | Labels<br>Per Roll | Rec. Ribbon   |
|---------|------------------|-------|--------|----------------------------|---------------------------|--------------------|---------------|
| Fig. 3  | B30C-500-595-WT  | B-595 | White  | 0.500 (12.7)               | 100 (30.5)                | 1 roll (cont.)     | B30-R10000    |
| Fig. 3  | B30C-1125-595-WT | B-595 | White  | 1.125 (28.6)               | 100 (30.5)                | 1 roll (cont.)     | B30-R10000    |
| Fig. 3  | B30C-2250-595-WT | B-595 | White  | 2.250 (57.5)               | 100 (30.5)                | 1 roll (cont.)     | B30-R10000    |
| Fig. 3  | B30C-3000-595-WT | B-595 | White  | 3.000 (76.2)               | 100 (30.5)                | 1 roll (cont.)     | B30-R10000    |
| Fig. 3  | B30C-4000-595-WT | B-595 | White  | 4.000 (101.6)              | 100 (30.5)                | 1 roll (cont.)     | B30-R10000    |
| Fig. 3  | B30C-500-595-YL  | B-595 | Yellow | 0.500 (12.7)               | 100 (30.5)                | 1 roll (cont.)     | B30-R10000    |
| Fig. 3  | B30C-1125-595-YL | B-595 | Yellow | 1.125 (28.6)               | 100 (30.5)                | 1 roll (cont.)     | B30-R10000    |
| Fig. 3  | B30C-2250-595-YL | B-595 | Yellow | 2.250 (57.5)               | 100 (30.5)                | 1 roll (cont.)     | B30-R10000    |
| Fig. 3  | B30C-3000-595-YL | B-595 | Yellow | 3.000 (76.2)               | 100 (30.5)                | 1 roll (cont.)     | B30-R10000    |
| Fig. 3  | B30C-4000-595-YL | B-595 | Yellow | 4.000 (101.6)              | 100 (30.5)                | 1 roll (cont.)     | B30-R10000    |
| Fig. 3  | B30C-500-595-RD  | B-595 | Red    | 0.500 (12.7)               | 100 (30.5)                | 1 roll (cont.)     | B30-R10000-WT |
| Fig. 3  | B30C-1125-595-RD | B-595 | Red    | 1.125 (28.6)               | 100 (30.5)                | 1 roll (cont.)     | B30-R10000-WT |
| Fig. 3  | B30C-2250-595-RD | B-595 | Red    | 2.250 (57.5)               | 100 (30.5)                | 1 roll (cont.)     | B30-R10000-WT |
| Fig. 3  | B30C-4000-595-RD | B-595 | Red    | 4.000 (101.6)              | 100 (30.5)                | 1 roll (cont.)     | B30-R10000-WT |
| Fig. 3  | B30C-500-595-BL  | B-595 | Blue   | 0.500 (12.7)               | 100 (30.5)                | 1 roll (cont.)     | B30-R10000-WT |
| Fig. 3  | B30C-1125-595-BL | B-595 | Blue   | 1.125 (28.6)               | 100 (30.5)                | 1 roll (cont.)     | B30-R10000-WT |
| Fig. 3  | B30C-2250-595-BL | B-595 | Blue   | 2.250 (57.5)               | 100 (30.5)                | 1 roll (cont.)     | B30-R10000-WT |
| Fig. 3  | B30C-4000-595-BL | B-595 | Blue   | 4.000 (101.6)              | 100 (30.5)                | 1 roll (cont.)     | B30-R10000-WT |
| Fig. 3  | B30C-500-595-GN  | B-595 | Green  | 0.500 (12.7)               | 100 (30.5)                | 1 roll (cont.)     | B30-R10000-WT |
| Fig. 3  | B30C-1125-595-GN | B-595 | Green  | 1.125 (28.6)               | 100 (30.5)                | 1 roll (cont.)     | B30-R10000-WT |
| Fig. 3  | B30C-2250-595-GN | B-595 | Green  | 2.250 (57.5)               | 100 (30.5)                | 1 roll (cont.)     | B30-R10000-WT |
| Fig. 3  | B30C-4000-595-GN | B-595 | Green  | 4.000 (101.6)              | 100 (30.5)                | 1 roll (cont.)     | B30-R10000-WT |
| Fig. 3  | B30C-500-595-OR  | B-595 | Orange | 0.500 (12.7)               | 100 (30.5)                | 1 roll (cont.)     | B30-R10000    |
| Fig. 3  | B30C-1125-595-OR | B-595 | Orange | 1.125 (28.6)               | 100 (30.5)                | 1 roll (cont.)     | B30-R10000    |
| Fig. 3  | B30C-2250-595-OR | B-595 | Orange | 2.250 (57.5)               | 100 (30.5)                | 1 roll (cont.)     | B30-R10000    |
| Fig. 3  | B30C-4000-595-OR | B-595 | Orange | 4.000 (101.6)              | 100 (30.5)                | 1 roll (cont.)     | B30-R10000    |
| Fig. 3  | B30C-500-595-BK  | B-595 | Black  | 0.500 (12.7)               | 100 (30.5)                | 1 roll (cont.)     | B30-R10000-WT |
| Fig. 3  | B30C-1125-595-BK | B-595 | Black  | 1.125 (28.6)               | 100 (30.5)                | 1 roll (cont.)     | B30-R10000-WT |
| Fig. 3  | B30C-2250-595-BK | B-595 | Black  | 2.250 (57.5)               | 100 (30.5)                | 1 roll (cont.)     | B30-R10000-WT |
| Fig. 3  | B30C-4000-595-BK | B-595 | Black  | 4.000 (101.6)              | 100 (30.5)                | 1 roll (cont.)     | B30-R10000-WT |
| Fig. 3  | B30C-500-595-BR  | B-595 | Brown  | 0.500 (12.7)               | 100 (30.5)                | 1 roll (cont.)     | B30-R10000-WT |
| Fig. 3  | B30C-1125-595-BR | B-595 | Brown  | 1.125 (28.6)               | 100 (30.5)                | 1 roll (cont.)     | B30-R10000-WT |
| Fig. 3  | B30C-2250-595-BR | B-595 | Brown  | 2.250 (57.5)               | 100 (30.5)                | 1 roll (cont.)     | B30-R10000-WT |
| Fig. 3  | B30C-4000-595-BR | B-595 | Brown  | 4.000 (101.6)              | 100 (30.5)                | 1 roll (cont.)     | B30-R10000-WT |
| Fig. 3  | B30C-500-595-GD  | B-595 | Gold   | 0.500 (12.7)               | 100 (30.5)                | 1 roll (cont.)     | B30-R10000    |
| Fig. 3  | B30C-1125-595-GD | B-595 | Gold   | 1.125 (28.6)               | 100 (30.5)                | 1 roll (cont.)     | B30-R10000    |
| Fig. 3  | B30C-2250-595-GD | B-595 | Gold   | 2.250 (57.5)               | 100 (30.5)                | 1 roll (cont.)     | B30-R10000    |
| Fig. 3  | B30C-4000-595-GD | B-595 | Gold   | 4.000 (101.6)              | 100 (30.5)                | 1 roll (cont.)     | B30-R10000    |
| Fig. 3  | B30C-500-595-GY  | B-595 | Gray   | 0.500 (12.7)               | 100 (30.5)                | 1 roll (cont.)     | B30-R10000    |
| Fig. 3  | B30C-1125-595-GY | B-595 | Gray   | 1.125 (28.6)               | 100 (30.5)                | 1 roll (cont.)     | B30-R10000    |
| Fig. 3  | B30C-2250-595-GY | B-595 | Gray   | 2.250 (57.5)               | 100 (30.5)                | 1 roll (cont.)     | B30-R10000    |
| Fig. 3  | B30C-4000-595-GY | B-595 | Gray   | 4.000 (101.6)              | 100 (30.5)                | 1 roll (cont.)     | B30-R10000    |
| Fig. 3  | B30C-500-595-PL  | B-595 | Purple | 0.500 (12.7)               | 100 (30.5)                | 1 roll (cont.)     | B30-R10000-WT |
| Fig. 3  | B30C-1125-595-PL | B-595 | Purple | 1.125 (28.6)               | 100 (30.5)                | 1 roll (cont.)     | B30-R10000-WT |
| Fig. 3  | B30C-2250-595-PL | B-595 | Purple | 2.250 (57.5)               | 100 (30.5)                | 1 roll (cont.)     | B30-R10000-WT |
| Fig. 3  | B30C-4000-595-PL | B-595 | Purple | 4.000 (101.6)              | 100 (30.5)                | 1 roll (cont.)     | B30-R10000-WT |
| Fig. 3  | B30C-500-595-CL  | B-595 | Clear  | 0.500 (12.7)               | 100 (30.5)                | 1 roll (cont.)     | B30-R10000    |
| Fig. 3  | B30C-1125-595-CL | B-595 | Clear  | 1.125 (28.6)               | 100 (30.5)                | 1 roll (cont.)     | B30-R10000    |
| Fig. 3  | B30C-2250-595-CL | B-595 | Clear  | 2.250 (57.5)               | 100 (30.5)                | 1 roll (cont.)     | B30-R10000    |
| Fig. 3  | B30C-4000-595-CL | B-595 | Clear  | 4.000 (101.6)              | 100 (30.5)                | 1 roll (cont.)     | B30-R10000    |

U.S. Patent Nos. 5,823,689; 6,570,602. Additional Patents Pending.

All part numbers above are compatible with BradyPrinter i3300 and BBP®33. Parts may also be compatible with BradyPrinter S3000, BradyPrinter S3100, BBP®30, BBP®31, BBP®35 and BBP®37 printers. Visit BradyID.com to confirm compatibility.

## Low-Halide Polyester (B-569)

- Low-halide content for labeling stainless steel pipes and surfaces. Applies best to very smooth surfaces and ideal for mounting to rigid panels

Service temp: -40° to 212° F

Application temp: 0° to 212° F

Average outdoor durability: 3-5 years




Figure 3



| Diagram | Catalog #        | B#    | Color      | Label Width A<br>Inch (mm) | Roll Length B<br>Feet (m) | Labels Per Roll | Rec. Ribbon   |
|---------|------------------|-------|------------|----------------------------|---------------------------|-----------------|---------------|
| Fig. 3  | B30C-500-569-WT  | B-569 | White      | 0.500 (12.7)               | 100 (30.5)                | 1 roll (cont.)  | B30-R10000    |
| Fig. 3  | B30C-1125-569-WT | B-569 | White      | 1.125 (28.6)               | 100 (30.5)                | 1 roll (cont.)  | B30-R10000    |
| Fig. 3  | B30C-2250-569-WT | B-569 | White      | 2.250 (57.5)               | 100 (30.5)                | 1 roll (cont.)  | B30-R10000    |
| Fig. 3  | B30C-3000-569-WT | B-569 | White      | 3.000 (76.2)               | 100 (30.5)                | 1 roll (cont.)  | B30-R10000    |
| Fig. 3  | B30C-4000-569-WT | B-569 | White      | 4.000 (101.6)              | 100 (30.5)                | 1 roll (cont.)  | B30-R10000    |
| Fig. 3  | B30C-500-569-YL  | B-569 | Yellow     | 0.500 (12.7)               | 100 (30.5)                | 1 roll (cont.)  | B30-R10000    |
| Fig. 3  | B30C-1125-569-YL | B-569 | Yellow     | 1.125 (28.6)               | 100 (30.5)                | 1 roll (cont.)  | B30-R10000    |
| Fig. 3  | B30C-2250-569-YL | B-569 | Yellow     | 2.250 (57.5)               | 100 (30.5)                | 1 roll (cont.)  | B30-R10000    |
| Fig. 3  | B30C-4000-569-YL | B-569 | Yellow     | 4.000 (101.6)              | 100 (30.5)                | 1 roll (cont.)  | B30-R10000    |
| Fig. 3  | B30C-500-569-RD  | B-569 | Red        | 0.500 (12.7)               | 100 (30.5)                | 1 roll (cont.)  | B30-R10000-WT |
| Fig. 3  | B30C-1125-569-RD | B-569 | Red        | 1.125 (28.6)               | 100 (30.5)                | 1 roll (cont.)  | B30-R10000-WT |
| Fig. 3  | B30C-2250-569-RD | B-569 | Red        | 2.250 (57.5)               | 100 (30.5)                | 1 roll (cont.)  | B30-R10000-WT |
| Fig. 3  | B30C-4000-569-RD | B-569 | Red        | 4.000 (101.6)              | 100 (30.5)                | 1 roll (cont.)  | B30-R10000-WT |
| Fig. 3  | B30C-500-569-BL  | B-569 | Blue       | 0.500 (12.7)               | 100 (30.5)                | 1 roll (cont.)  | B30-R10000-WT |
| Fig. 3  | B30C-1125-569-BL | B-569 | Blue       | 1.125 (28.6)               | 100 (30.5)                | 1 roll (cont.)  | B30-R10000-WT |
| Fig. 3  | B30C-2250-569-BL | B-569 | Blue       | 2.250 (57.5)               | 100 (30.5)                | 1 roll (cont.)  | B30-R10000-WT |
| Fig. 3  | B30C-4000-569-BL | B-569 | Blue       | 4.000 (101.6)              | 100 (30.5)                | 1 roll (cont.)  | B30-R10000-WT |
| Fig. 3  | B30C-500-569-LB  | B-569 | Light Blue | 0.500 (12.7)               | 100 (30.5)                | 1 roll (cont.)  | B30-R10000    |
| Fig. 3  | B30C-1125-569-LB | B-569 | Light Blue | 1.125 (28.6)               | 100 (30.5)                | 1 roll (cont.)  | B30-R10000    |
| Fig. 3  | B30C-2250-569-LB | B-569 | Light Blue | 2.250 (57.5)               | 100 (30.5)                | 1 roll (cont.)  | B30-R10000    |
| Fig. 3  | B30C-4000-569-LB | B-569 | Light Blue | 4.000 (101.6)              | 100 (30.5)                | 1 roll (cont.)  | B30-R10000    |
| Fig. 3  | B30C-500-569-SB  | B-569 | Sky Blue   | 0.500 (12.7)               | 100 (30.5)                | 1 roll (cont.)  | B30-R10000    |
| Fig. 3  | B30C-1125-569-SB | B-569 | Sky Blue   | 1.125 (28.6)               | 100 (30.5)                | 1 roll (cont.)  | B30-R10000    |
| Fig. 3  | B30C-2250-569-SB | B-569 | Sky Blue   | 2.250 (57.5)               | 100 (30.5)                | 1 roll (cont.)  | B30-R10000    |
| Fig. 3  | B30C-4000-569-SB | B-569 | Sky Blue   | 4.000 (101.6)              | 100 (30.5)                | 1 roll (cont.)  | B30-R10000    |
| Fig. 3  | B30C-500-569-GN  | B-569 | Green      | 0.500 (12.7)               | 100 (30.5)                | 1 roll (cont.)  | B30-R10000-WT |
| Fig. 3  | B30C-1125-569-GN | B-569 | Green      | 1.125 (28.6)               | 100 (30.5)                | 1 roll (cont.)  | B30-R10000-WT |
| Fig. 3  | B30C-2250-569-GN | B-569 | Green      | 2.250 (57.5)               | 100 (30.5)                | 1 roll (cont.)  | B30-R10000-WT |
| Fig. 3  | B30C-4000-569-GN | B-569 | Green      | 4.000 (101.6)              | 100 (30.5)                | 1 roll (cont.)  | B30-R10000-WT |
| Fig. 3  | B30C-500-569-OR  | B-569 | Orange     | 0.500 (12.7)               | 100 (30.5)                | 1 roll (cont.)  | B30-R10000    |
| Fig. 3  | B30C-1125-569-OR | B-569 | Orange     | 1.125 (28.6)               | 100 (30.5)                | 1 roll (cont.)  | B30-R10000    |
| Fig. 3  | B30C-2250-569-OR | B-569 | Orange     | 2.250 (57.5)               | 100 (30.5)                | 1 roll (cont.)  | B30-R10000    |
| Fig. 3  | B30C-4000-569-OR | B-569 | Orange     | 4.000 (101.6)              | 100 (30.5)                | 1 roll (cont.)  | B30-R10000    |
| Fig. 3  | B30C-500-569-BK  | B-569 | Black      | 0.500 (12.7)               | 100 (30.5)                | 1 roll (cont.)  | B30-R10000-WT |
| Fig. 3  | B30C-1125-569-BK | B-569 | Black      | 1.125 (28.6)               | 100 (30.5)                | 1 roll (cont.)  | B30-R10000-WT |
| Fig. 3  | B30C-2250-569-BK | B-569 | Black      | 2.250 (57.5)               | 100 (30.5)                | 1 roll (cont.)  | B30-R10000-WT |
| Fig. 3  | B30C-4000-569-BK | B-569 | Black      | 4.000 (101.6)              | 100 (30.5)                | 1 roll (cont.)  | B30-R10000-WT |
| Fig. 3  | B30C-500-569-BR  | B-569 | Brown      | 0.500 (12.7)               | 100 (30.5)                | 1 roll (cont.)  | B30-R10000-WT |
| Fig. 3  | B30C-1125-569-BR | B-569 | Brown      | 1.125 (28.6)               | 100 (30.5)                | 1 roll (cont.)  | B30-R10000-WT |
| Fig. 3  | B30C-2250-569-BR | B-569 | Brown      | 2.250 (57.5)               | 100 (30.5)                | 1 roll (cont.)  | B30-R10000-WT |
| Fig. 3  | B30C-4000-569-BR | B-569 | Brown      | 4.000 (101.6)              | 100 (30.5)                | 1 roll (cont.)  | B30-R10000-WT |
| Fig. 3  | B30C-500-569-OC  | B-569 | Ochre      | 0.500 (12.7)               | 100 (30.5)                | 1 roll (cont.)  | B30-R10000    |
| Fig. 3  | B30C-1125-569-OC | B-569 | Ochre      | 1.125 (28.6)               | 100 (30.5)                | 1 roll (cont.)  | B30-R10000    |
| Fig. 3  | B30C-2250-569-OC | B-569 | Ochre      | 2.250 (57.5)               | 100 (30.5)                | 1 roll (cont.)  | B30-R10000    |
| Fig. 3  | B30C-4000-569-OC | B-569 | Ochre      | 4.000 (101.6)              | 100 (30.5)                | 1 roll (cont.)  | B30-R10000    |
| Fig. 3  | B30C-500-569-TN  | B-569 | Tan        | 0.500 (12.7)               | 100 (30.5)                | 1 roll (cont.)  | B30-R10000    |
| Fig. 3  | B30C-1125-569-TN | B-569 | Tan        | 1.125 (28.6)               | 100 (30.5)                | 1 roll (cont.)  | B30-R10000    |
| Fig. 3  | B30C-2250-569-TN | B-569 | Tan        | 2.250 (57.5)               | 100 (30.5)                | 1 roll (cont.)  | B30-R10000    |
| Fig. 3  | B30C-4000-569-TN | B-569 | Tan        | 4.000 (101.6)              | 100 (30.5)                | 1 roll (cont.)  | B30-R10000    |
| Fig. 3  | B30C-500-569-GY  | B-569 | Gray       | 0.500 (12.7)               | 100 (30.5)                | 1 roll (cont.)  | B30-R10000    |
| Fig. 3  | B30C-1125-569-GY | B-569 | Gray       | 1.125 (28.6)               | 100 (30.5)                | 1 roll (cont.)  | B30-R10000    |
| Fig. 3  | B30C-2250-569-GY | B-569 | Gray       | 2.250 (57.5)               | 100 (30.5)                | 1 roll (cont.)  | B30-R10000    |
| Fig. 3  | B30C-4000-569-GY | B-569 | Gray       | 4.000 (101.6)              | 100 (30.5)                | 1 roll (cont.)  | B30-R10000    |
| Fig. 3  | B30C-500-569-PL  | B-569 | Purple     | 0.500 (12.7)               | 100 (30.5)                | 1 roll (cont.)  | B30-R10000-WT |
| Fig. 3  | B30C-1125-569-PL | B-569 | Purple     | 1.125 (28.6)               | 100 (30.5)                | 1 roll (cont.)  | B30-R10000-WT |
| Fig. 3  | B30C-2250-569-PL | B-569 | Purple     | 2.250 (57.5)               | 100 (30.5)                | 1 roll (cont.)  | B30-R10000-WT |
| Fig. 3  | B30C-4000-569-PL | B-569 | Purple     | 4.000 (101.6)              | 100 (30.5)                | 1 roll (cont.)  | B30-R10000-WT |
| Fig. 3  | B30C-500-569-PK  | B-569 | Pink       | 0.500 (12.7)               | 100 (30.5)                | 1 roll (cont.)  | B30-R10000    |
| Fig. 3  | B30C-1125-569-PK | B-569 | Pink       | 1.125 (28.6)               | 100 (30.5)                | 1 roll (cont.)  | B30-R10000    |
| Fig. 3  | B30C-2250-569-PK | B-569 | Pink       | 2.250 (57.5)               | 100 (30.5)                | 1 roll (cont.)  | B30-R10000    |
| Fig. 3  | B30C-4000-569-PK | B-569 | Pink       | 4.000 (101.6)              | 100 (30.5)                | 1 roll (cont.)  | B30-R10000    |
| Fig. 3  | B30C-500-569-CL  | B-569 | Clear      | 0.500 (12.7)               | 100 (30.5)                | 1 roll (cont.)  | B30-R10000    |
| Fig. 3  | B30C-1125-569-CL | B-569 | Clear      | 1.125 (28.6)               | 100 (30.5)                | 1 roll (cont.)  | B30-R10000    |
| Fig. 3  | B30C-2250-569-CL | B-569 | Clear      | 2.250 (57.5)               | 100 (30.5)                | 1 roll (cont.)  | B30-R10000    |
| Fig. 3  | B30C-4000-569-CL | B-569 | Clear      | 4.000 (101.6)              | 100 (30.5)                | 1 roll (cont.)  | B30-R10000    |



All part numbers above are compatible with BradyPrinter i3300 and BBP®33. Parts may also be compatible with BradyPrinter S3000, BradyPrinter S3100, BBP®30, BBP®31, BBP®35 and BBP®37 printers. Visit BradyID.com to confirm compatibility.



## ToughWash® Washdown Resistant Labels (B-854 and B-855)

- Withstands high pressure, heat, harsh chemicals and numerous washdown cycles
- Legible and long-lasting for even the toughest washdown cycles
- Ideal for use in the food and beverage industry
- B-854 offers metal detectable layer to allow detection in food stream

Service temp: -40° to 230° F  
Agency approvals: RoHS








| Diagram   | Catalog #          | B#    | Color | Label Width A<br>Inch (mm) | Length B<br>Inch (mm) | Labels Per Roll | Rec. Ribbon |
|---|--------------------|-------|-------|----------------------------|-----------------------|-----------------|-------------|
| <b>ToughWash Metal Detectable Material (B-854):</b> |                    |       |       |                            |                       |                 |             |
| Fig. 3  | B30C-4000-854-YL   | B-854 |       | 4.000 (101.06)             | 50 ft. (15.2 m)       | 1 roll (cont.)  | B30-R6000   |
| Fig. 3  | B30C-4000-854-WT   | B-854 |       | 4.000 (101.06)             | 50 ft. (15.2 m)       | 1 roll (cont.)  | B30-R6000   |
| Fig. 73   | B30-25-854-OSHAADA | B-854 |       | 4.000 (101.06)             | 6.250 (158.8)         | 100             | B30-R6000   |
| Fig. 73   | B30-25-854-ANSIWA  | B-854 |       | 4.000 (101.06)             | 6.250 (158.8)         | 100             | B30-R6000   |
| Fig. 73   | B30-25-854-ANSIDA  | B-854 |       | 4.000 (101.06)             | 6.250 (158.8)         | 100             | B30-R6000   |
| Fig. 73   | B30-25-854-ANSICA  | B-854 |       | 4.000 (101.06)             | 6.250 (158.8)         | 100             | B30-R6000   |
| Fig. 73   | B30-25-854-PEL     | B-854 |       | 4.000 (101.06)             | 6.250 (158.8)         | 100             | B30-R6000   |
| Fig. 73   | B30-25-854-PREC    | B-854 |       | 4.000 (101.06)             | 6.250 (158.8)         | 100             | B30-R6000   |
| <b>ToughWash Material (B-855):</b>                  |                    |       |       |                            |                       |                 |             |
| Fig. 3  | B30C-1125-855-YL   | B-855 |       | 1.125 (28.6)               | 50 ft. (15.2 m)       | 1 roll (cont.)  | B30-R6000   |
| Fig. 3  | B30C-2250-855-YL   | B-855 |       | 2.250 (57.5)               | 50 ft. (15.2 m)       | 1 roll (cont.)  | B30-R6000   |
| Fig. 3  | B30C-4000-855-YL   | B-855 |       | 4.000 (101.06)             | 50 ft. (15.2 m)       | 1 roll (cont.)  | B30-R6000   |
| Fig. 3  | B30C-1125-855-WT   | B-855 |       | 1.125 (28.6)               | 50 ft. (15.2 m)       | 1 roll (cont.)  | B30-R6000   |
| Fig. 3  | B30C-2250-855-WT   | B-855 |       | 2.250 (57.5)               | 50 ft. (15.2 m)       | 1 roll (cont.)  | B30-R6000   |
| Fig. 3  | B30C-4000-855-WT   | B-855 |       | 4.000 (101.06)             | 50 ft. (15.2 m)       | 1 roll (cont.)  | B30-R6000   |
| Fig. 73   | B30-25-855-OSHAADA | B-855 |       | 4.000 (101.06)             | 6.250 (158.8)         | 100             | B30-R6000   |
| Fig. 73   | B30-25-855-ANSIWA  | B-855 |       | 4.000 (101.06)             | 6.250 (158.8)         | 100             | B30-R6000   |
| Fig. 73   | B30-25-855-ANSIDA  | B-855 |       | 4.000 (101.06)             | 6.250 (158.8)         | 100             | B30-R6000   |
| Fig. 73   | B30-25-855-ANSICA  | B-855 |       | 4.000 (101.06)             | 6.250 (158.8)         | 100             | B30-R6000   |
| Fig. 73   | B30-25-855-PEL     | B-855 |       | 4.000 (101.06)             | 6.250 (158.8)         | 100             | B30-R6000   |
| Fig. 73   | B30-25-855-PREC    | B-855 |       | 4.000 (101.06)             | 6.250 (158.8)         | 100             | B30-R6000   |

All part numbers above are compatible with BradyPrinter i3300 and BBP®33. Parts may also be compatible with BradyPrinter S3000, BradyPrinter S3100, BBP®30, BBP®31, BBP®35 and BBP®37 printers. Visit BradyID.com to confirm compatibility.

## Chemical and Solvent Resistant Polypropylene Labels (B-425, B-7425)

- Outstanding chemical and solvent resistance and print performance
- Not recommended for prolonged outdoor use

**B-425:** Service temp: -94° to 212° F  
**B-7425:** Service temp: -320° to 248° F  
 Agency approvals:    

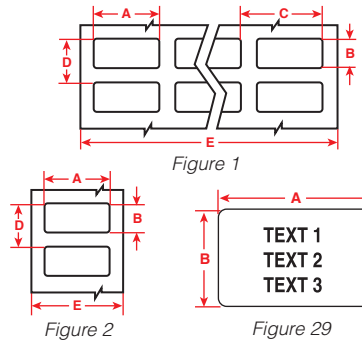


| Diagram | Catalog #    | B#     | Color | Label Width A<br>Inch (mm) | Label Height B<br>Inch (mm) | Horiz. Repeat C<br>Inch (mm) | Vert. Repeat D<br>Inch (mm) | Web Width E<br>Inch (mm) | Labels<br>Per Row | Labels<br>Per Roll | Rec. Ribbon |
|---------|--------------|--------|-------|----------------------------|-----------------------------|------------------------------|-----------------------------|--------------------------|-------------------|--------------------|-------------|
| Fig. 1  | B33-5-425    | B-425  | White | 1.000 (25.4)               | 0.500 (12.7)                | 1.075 (27.3)                 | 0.600 (15.2)                | 3.350 (85.1)             | 3                 | 5000               | B30-R4300   |
| Fig. 2  | B33-17-425   | B-425  | White | 2.000 (50.8)               | 1.000 (25.4)                | —                            | 1.125 (28.6)                | 2.200 (55.9)             | 1                 | 1500               | B30-R4300   |
| Fig. 2  | B33-18-425   | B-425  | White | 3.000 (76.2)               | 1.000 (25.4)                | —                            | 1.125 (28.6)                | 3.200 (81.3)             | 1                 | 1500               | B30-R4300   |
| Fig. 2  | B33-19-425   | B-425  | White | 3.000 (76.2)               | 2.000 (50.8)                | —                            | 2.125 (54.0)                | 3.200 (81.3)             | 1                 | 500                | B30-R4300   |
| Fig. 29 | B33-88-7425  | B-7425 | White | 1.000 (25.4)               | 0.750 (19.1)                | —                            | —                           | —                        | 2                 | 2000               | B30-R4300   |
| Fig. 29 | B33-179-7425 | B-7425 | White | 1.000 (25.4)               | 1.000 (25.4)                | —                            | —                           | —                        | 1                 | 1500               | B30-R4300   |
| Fig. 29 | B33-37-7425  | B-7425 | White | 1.500 (38.1)               | 0.500 (12.7)                | —                            | —                           | —                        | 2                 | 1500               | B30-R4300   |
| Fig. 29 | B33-136-7425 | B-7425 | White | 1.500 (38.1)               | 0.750 (19.1)                | —                            | —                           | —                        | 1                 | 1500               | B30-R4300   |
| Fig. 29 | B33-235-7425 | B-7425 | White | 1.500 (38.1)               | 1.000 (25.4)                | —                            | —                           | —                        | 1                 | 1250               | B30-R4300   |
| Fig. 29 | B33-258-7425 | B-7425 | White | 1.500 (38.1)               | 1.750 (44.5)                | —                            | —                           | —                        | 1                 | 900                | B30-R4300   |
| Fig. 29 | B33-53-7425  | B-7425 | White | 2.000 (50.8)               | 0.500 (12.7)                | —                            | —                           | —                        | 1                 | 2000               | B30-R4300   |

## Retro Reflective Tape (B-584)

- Highly reflective material shines back brightly when struck by light
- Ideal for labeling outdoor utility pedestals, hard hats, jobsite equipment and roof-top equipment
- Recommended for low light or inclement weather conditions

Service temp: -40° to 158° F  
 Application temp: 0° to 158° F (yellow and orange), 50° to 158° F (silver)  
 Average outdoor durability: 4 to 6 years




| Diagram | Catalog #        | B#    | Color  | Label Width A<br>Inch (mm) | Roll Length B<br>Feet (m) | Labels<br>Per Roll | Rec. Ribbon |
|---------|------------------|-------|--------|----------------------------|---------------------------|--------------------|-------------|
| Fig. 3  | B30C-1125-584-SL | B-584 | Silver | 1.125 (28.6)               | 50 (15.2)                 | 1 roll (cont.)     | B30-R10000  |
| Fig. 3  | B30C-2250-584-SL | B-584 | Silver | 2.250 (57.5)               | 50 (15.2)                 | 1 roll (cont.)     | B30-R10000  |
| Fig. 3  | B30C-4000-584-SL | B-584 | Silver | 4.000 (101.6)              | 50 (15.2)                 | 1 roll (cont.)     | B30-R10000  |
| Fig. 3  | B30C-1125-584-YL | B-584 | Yellow | 1.125 (28.6)               | 50 (15.2)                 | 1 roll (cont.)     | B30-R10000  |
| Fig. 3  | B30C-2250-584-YL | B-584 | Yellow | 2.250 (57.5)               | 50 (15.2)                 | 1 roll (cont.)     | B30-R10000  |
| Fig. 3  | B30C-4000-584-YL | B-584 | Yellow | 4.000 (101.6)              | 50 (15.2)                 | 1 roll (cont.)     | B30-R10000  |
| Fig. 3  | B30C-1125-584-OR | B-584 | Orange | 1.125 (28.6)               | 50 (15.2)                 | 1 roll (cont.)     | B30-R10000  |
| Fig. 3  | B30C-2250-584-OR | B-584 | Orange | 2.250 (57.5)               | 50 (15.2)                 | 1 roll (cont.)     | B30-R10000  |
| Fig. 3  | B30C-4000-584-OR | B-584 | Orange | 4.000 (101.6)              | 50 (15.2)                 | 1 roll (cont.)     | B30-R10000  |

## BradyGlo™ High-Intensity Photoluminescent Tape (B-526)

- For glow-in-the-dark identification up to 10 hours
- Designed for directional, evacuation and equipment marking. Ideal for marking emergency utility shut-offs, fire extinguishers, alarm pulls and vital equipment controls
- Complies with indoor use requirements specified in RS 6-1 and 6-1A of New York Local Law 26

Service temp: -40° to 140° F  
 Application temp: 40° to 140° F



| Diagram | Catalog #     | B#    | Color          | Label Width A<br>Inch (mm) | Roll Length B<br>Feet (m) | Labels<br>Per Roll | Rec. Ribbon |
|---------|---------------|-------|----------------|----------------------------|---------------------------|--------------------|-------------|
| Fig. 3  | B30C-1125-526 | B-526 | Luminous Green | 1.125 (28.6)               | 50 (15.2)                 | 1 roll (cont.)     | B30-R10000  |
| Fig. 3  | B30C-2250-526 | B-526 | Luminous Green | 2.250 (57.5)               | 50 (15.2)                 | 1 roll (cont.)     | B30-R10000  |
| Fig. 3  | B30C-4000-526 | B-526 | Luminous Green | 4.000 (101.6)              | 50 (15.2)                 | 1 roll (cont.)     | B30-R10000  |

All part numbers above are compatible with BradyPrinter i3300 and BBP®33. Parts may also be compatible with BradyPrinter S3000, BradyPrinter S3100, BBP®30, BBP®31, BBP®35 and BBP®37 printers. Visit BradyID.com to confirm compatibility.

## Printable Magnetic Supply (B-509)

- Easiest and quickest material for removing and repositioning
- Non-adhesive magnetic material that can be printed on directly
- Ideal for reusable, repositionable and Lean / 5S identification applications

Service temp: 0° to 158° F

Average outdoor durability: 3 to 5 years




Figure 3



| Diagram | Catalog #        | B#    | Color  | Label Width A Inch (mm) | Roll Length B Feet (m) | Labels Per Roll | Rec. Ribbon |
|---------|------------------|-------|--------|-------------------------|------------------------|-----------------|-------------|
| Fig. 3  | B30C-2500-509-WT | B-509 | White  | 2.500 (63.5)            | 25 (7.62)              | 1 roll (cont.)  | B30-R10000  |
| Fig. 3  | B30C-4250-509-WT | B-509 | White  | 4.250 (107.8)           | 25 (7.62)              | 1 roll (cont.)  | B30-R10000  |
| Fig. 3  | B30C-2500-509-YL | B-509 | Yellow | 2.500 (63.5)            | 25 (7.62)              | 1 roll (cont.)  | B30-R10000  |
| Fig. 3  | B30C-4250-509-YL | B-509 | Yellow | 4.250 (107.8)           | 25 (7.62)              | 1 roll (cont.)  | B30-R10000  |

## Repositionable Vinyl (B-581)

- Aggressive adhesive stays in place but removes cleanly without leaving adhesive residue
- Ideal for temporary, removable and repositionable labels, such as Lean / 5S inventory labels

Service temp: -40° to 180° F

Application temp: 50° to 180° F

Average outdoor durability: 5 years




Figure 3



| Diagram | Catalog #        | B#    | Color  | Label Width A Inch (mm) | Roll Length B Feet (m) | Labels Per Roll | Rec. Ribbon |
|---------|------------------|-------|--------|-------------------------|------------------------|-----------------|-------------|
| Fig. 3  | B30C-500-581-WT  | B-581 | White  | 0.500 (12.7)            | 100 (30.5)             | 1 roll (cont.)  | B30-R10000  |
| Fig. 3  | B30C-1125-581-WT | B-581 | White  | 1.125 (28.6)            | 100 (30.5)             | 1 roll (cont.)  | B30-R10000  |
| Fig. 3  | B30C-2250-581-WT | B-581 | White  | 2.250 (57.5)            | 100 (30.5)             | 1 roll (cont.)  | B30-R10000  |
| Fig. 3  | B30C-4000-581-WT | B-581 | White  | 4.000 (101.6)           | 100 (30.5)             | 1 roll (cont.)  | B30-R10000  |
| Fig. 3  | B30C-500-581-YL  | B-581 | Yellow | 0.500 (12.7)            | 100 (30.5)             | 1 roll (cont.)  | B30-R10000  |
| Fig. 3  | B30C-1125-581-YL | B-581 | Yellow | 1.125 (28.6)            | 100 (30.5)             | 1 roll (cont.)  | B30-R10000  |
| Fig. 3  | B30C-2250-581-YL | B-581 | Yellow | 2.250 (57.5)            | 100 (30.5)             | 1 roll (cont.)  | B30-R10000  |
| Fig. 3  | B30C-4000-581-YL | B-581 | Yellow | 4.000 (101.6)           | 100 (30.5)             | 1 roll (cont.)  | B30-R10000  |

## Dissolvable Paper Labels (B-403)

- Designed for temporary applications where easy removal, re-identification or waste reduction are valued
- Ideal for labeling vials, tubes or general glassware, temporary asset tracking, animal housing identification, and general use
- Completely dissolves in warm water within 30 seconds, leaving no adhesive residue




Figure 3



| Diagram | Catalog #        | B#    | Color | Label Width A Inch (mm) | Roll Length B Inch (mm) | Labels Per Roll | Rec. Ribbon |
|---------|------------------|-------|-------|-------------------------|-------------------------|-----------------|-------------|
| Fig. 3  | B30C-1125-403-WT | B-403 | White | 1.125 (28.575)          | 100 (30.5)              | 1 (cont.)       | B30-R4300   |
| Fig. 3  | B30C-2250-403-WT | B-403 | White | 2.250 (57.15)           | 100 (30.5)              | 1 (cont.)       | B30-R4300   |
| Fig. 3  | B30C-3000-403-WT | B-403 | White | 3.000 (76.2)            | 100 (30.5)              | 1 (cont.)       | B30-R4300   |
| Fig. 3  | B30C-4000-403-WT | B-403 | White | 4.000 (101.6)           | 100 (30.5)              | 1 (cont.)       | B30-R4300   |

All part numbers above are compatible with BradyPrinter i3300 and BBP®33. Parts may also be compatible with BradyPrinter S3000, BradyPrinter S3100, BBP®30, BBP®31, BBP®35 and BBP®37 printers. Visit [BradyID.com](http://BradyID.com) to confirm compatibility.



## Pre-Printed GHS / CLP Chemical Labels (B-569 and B-7569)

- Blank labels with pre-printed red diamonds allow the printer to produce 2-color GHS / CLP labels in one print pass
- 3 sizes of labels, each with 6 diamond layouts that match templates in the printer app (if applicable) or in the Brady Workstation GHS App
- Indoor / outdoor vinyl material and durable inks withstand exposure to moisture, chemicals and handling

Service temp: -4° to 180° F

Application temp: 50° to 180° F

Average outdoor durability: 3-5 years



| Catalog #          | B#     | Material  | Legend |                    | Label Height<br>Inch (mm) | Label Width<br>Inch (mm) | Labels<br>Per Row | Labels<br>Per Roll | Rec. Ribbon |
|--------------------|--------|-----------|--------|--------------------|---------------------------|--------------------------|-------------------|--------------------|-------------|
| B30-260-7569-CLP1  | B-7569 | Vinyl     |        | L1 Diamond + Text  | 2.170 (55.0)              | 3.350 (85.0)             | 1                 | 340                | B30-R10000  |
| B30-261-7569-CLP1  | B-7569 | Vinyl     |        | L1 Diamond + Text  | 2.950 (75.0)              | 4.330 (110.0)            | 1                 | 270                | B30-R10000  |
| B30-262-7569-CLP1  | B-7569 | Vinyl     |        | L1 Diamond + Text  | 4.130 (105.0)             | 6.100 (155.0)            | 1                 | 200                | B30-R10000  |
| B30-260-7569-CLP2  | B-7569 | Vinyl     |        | L2 Diamond + Text  | 2.170 (55.0)              | 3.350 (85.0)             | 1                 | 340                | B30-R10000  |
| B30-261-7569-CLP2  | B-7569 | Vinyl     |        | L2 Diamond + Text  | 2.950 (75.0)              | 4.330 (110.0)            | 1                 | 270                | B30-R10000  |
| B30-262-7569-CLP2  | B-7569 | Vinyl     |        | L2 Diamond + Text  | 4.130 (105.0)             | 6.100 (155.0)            | 1                 | 200                | B30-R10000  |
| B30-260-7569-CLP3A | B-7569 | Vinyl     |        | L3A Diamond + Text | 2.170 (55.0)              | 3.350 (85.0)             | 1                 | 340                | B30-R10000  |
| B30-261-7569-CLP3A | B-7569 | Vinyl     |        | L3A Diamond + Text | 2.950 (75.0)              | 4.330 (110.0)            | 1                 | 270                | B30-R10000  |
| B30-262-7569-CLP3A | B-7569 | Vinyl     |        | L3A Diamond + Text | 4.130 (105.0)             | 6.100 (155.0)            | 1                 | 200                | B30-R10000  |
| B30-260-7569-CLP3B | B-7569 | Vinyl     |        | L3B Diamond + Text | 2.170 (55.0)              | 3.350 (85.0)             | 1                 | 340                | B30-R10000  |
| B30-261-7569-CLP3B | B-7569 | Vinyl     |        | L3B Diamond + Text | 2.950 (75.0)              | 4.330 (110.0)            | 1                 | 270                | B30-R10000  |
| B30-262-7569-CLP3B | B-7569 | Vinyl     |        | L3B Diamond + Text | 4.130 (105.0)             | 6.100 (155.0)            | 1                 | 200                | B30-R10000  |
| B30-260-7569-CLP4A | B-7569 | Vinyl     |        | L4A Diamond + Text | 2.170 (55.0)              | 3.350 (85.0)             | 1                 | 340                | B30-R10000  |
| B30-261-7569-CLP4A | B-7569 | Vinyl     |        | L4A Diamond + Text | 2.950 (75.0)              | 4.330 (110.0)            | 1                 | 270                | B30-R10000  |
| B30-262-7569-CLP4A | B-7569 | Vinyl     |        | L4A Diamond + Text | 4.130 (105.0)             | 6.100 (155.0)            | 1                 | 200                | B30-R10000  |
| B30-260-569-CLP4B  | B-569  | Polyester |        | L4B Diamond + Text | 2.170 (55.0)              | 3.350 (85.0)             | 1                 | 340                | B30-R10000  |
| B30-260-7569-CLP4B | B-7569 | Vinyl     |        | L4B Diamond + Text | 2.170 (55.0)              | 3.350 (85.0)             | 1                 | 340                | B30-R10000  |
| B30-261-569-CLP4B  | B-569  | Polyester |        | L4B Diamond + Text | 2.950 (75.0)              | 4.330 (110.0)            | 1                 | 270                | B30-R10000  |
| B30-261-7569-CLP4B | B-7569 | Vinyl     |        | L4B Diamond + Text | 2.950 (75.0)              | 4.330 (110.0)            | 1                 | 270                | B30-R10000  |
| B30-262-569-CLP4B  | B-569  | Polyester |        | L4B Diamond + Text | 4.130 (105.0)             | 6.100 (155.0)            | 1                 | 200                | B30-R10000  |
| B30-262-7569-CLP4B | B-7569 | Vinyl     |        | L4B Diamond + Text | 4.130 (105.0)             | 6.100 (155.0)            | 1                 | 200                | B30-R10000  |
| B30-18-7569-CLP4C  | B-7569 | Vinyl     |        | L4C Diamond + Text | 1.000 (25.4)              | 3.000 (76.2)             | 1                 | 1000               | B30-R10000  |

### ▶ Easily create your GHS labels with Brady Workstation GHS App














- Use built-in pre-formatted label layouts with approved GHS symbols
- Search the built-in chemical database by CAS number to auto-populate your label, then edit to meet your specific SDS
- Print any of the six template sizes
- No driver required when using the BradyPrinter i3300



All part numbers above are compatible with BradyPrinter i3300 and BBP®33. Parts may also be compatible with BradyPrinter S3000, BradyPrinter S3100, BBP®30, BBP®31, BBP®35 and BBP®37 printers. Visit BradyID.com to confirm compatibility.

## General ID Labels for Lean / 5S, Bins and Production Areas (B-483, B-484A, B-498, B-499 and B-595)

- Also ideal for marking backer board, DIN rail, relays, PLCs, switches, solenoids, drive motors and other components inside panels
- All recommended materials are flexible and have high-tack adhesives for adhesion to a wide variety of surfaces and components

**B-483:** Service temp: -40° to 248° F Agency approvals:     
**B-484A:** Service temp: -40° to 240° F Agency approvals:     
**B-498:** Service temp: -40° to 175° F Agency approvals:     
**B-499:** Service temp: -40° to 193° F Agency approvals:     
**B-595:** Service temp: -40° to 180° F, 8-10 years average outdoor durability Agency approvals: 

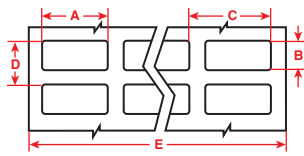


Figure 1




Figure 2




Figure 3





| Diagram   | Catalog #        | B#     | Color  | Label Width A<br>Inch (mm) | Label Height B<br>Inch (mm) | Horiz. Repeat C<br>Inch (mm) | Vert. Repeat D<br>Inch (mm) | Web Width E<br>Inch (mm) | Labels Per Row | Labels Per Roll | Rec. Ribbon |
|---|------------------|--------|--------|----------------------------|-----------------------------|------------------------------|-----------------------------|--------------------------|----------------|-----------------|-------------|
| <b>Vinyl Cloth - Aggressive but repositionable adhesive (B-498):</b>                                      |                  |        |        |                            |                             |                              |                             |                          |                |                 |             |
| Fig. 1  | B33-90-498       | B-498  | White  | 0.250 (6.4)                | 1.437 (36.5)                | 0.350 (8.9)                  | 1.562 (39.7)                | 2.200 (55.9)             | 6              | 2500            | B30-R6200   |
| Fig. 1  | B33-68-498       | B-498  | White  | 0.500 (12.7)               | 0.750 (19.1)                | 0.600 (15.2)                 | 0.875 (22.2)                | 2.500 (63.5)             | 4              | 5000            | B30-R6200   |
| Fig. 1  | B33-87-498       | B-498  | White  | 0.500 (12.7)               | 1.437 (36.5)                | 0.600 (15.2)                 | 1.562 (39.7)                | 3.700 (94.0)             | 6              | 2500            | B30-R6200   |
| Fig. 1  | B33-1-498        | B-498  | White  | 0.750 (19.1)               | 0.250 (6.4)                 | 0.800 (20.3)                 | 0.350 (8.9)                 | 3.350 (85.1)             | 4              | 5000            | B30-R6200   |
| Fig. 1  | B33-95-498       | B-498  | White  | 0.800 (20.3)               | 1.437 (36.5)                | 0.900 (22.9)                 | 1.562 (39.7)                | 2.800 (71.1)             | 3              | 2300            | B30-R6200   |
| Fig. 1  | B33-5-498        | B-498  | White  | 1.000 (25.4)               | 0.500 (12.7)                | 1.075 (27.3)                 | 0.600 (15.2)                | 3.350 (85.1)             | 3              | 5000            | B30-R6200   |
| Fig. 1  | B33-88-498       | B-498  | White  | 1.000 (25.4)               | 0.750 (19.1)                | 1.100 (27.9)                 | 0.875 (22.2)                | 2.300 (58.4)             | 2              | 2500            | B30-R6200   |
| Fig. 1  | B33-89-498       | B-498  | White  | 1.000 (25.4)               | 1.437 (36.5)                | 1.100 (27.9)                 | 1.562 (39.7)                | 3.400 (86.4)             | 3              | 2300            | B30-R6200   |
| <b>Nylon Cloth - Permanent adhesive (B-499):</b>  |                  |        |        |                            |                             |                              |                             |                          |                |                 |             |
| Fig. 1  | B33-68-499       | B-499  | White  | 0.500 (12.7)               | 0.750 (19.1)                | 0.600 (15.2)                 | 0.875 (22.2)                | 2.500 (63.5)             | 4              | 1500            | B30-R6000   |
| Fig. 1  | B33-165-499      | B-499  | White  | 0.800 (20.3)               | 1.437 (36.5)                | 0.900 (22.9)                 | 1.562 (39.7)                | 3.700 (94.0)             | 4              | 2500            | B30-R6000   |
| Fig. 2  | B33-125-499      | B-499  | White  | 0.900 (22.9)               | 0.500 (12.7)                | -                            | -                           | -                        | 1              | 1500            | B30-R6000   |
| Fig. 1  | B33-126-499      | B-499  | White  | 0.900 (22.9)               | 0.500 (12.7)                | -                            | -                           | -                        | 2              | 1500            | B30-R6000   |
| Fig. 2  | B33-163-499      | B-499  | White  | 1.000 (25.4)               | 0.375 (9.5)                 | -                            | -                           | -                        | 1              | 1500            | B30-R6000   |
| Fig. 1  | B33-152-499      | B-499  | White  | 1.000 (25.4)               | 0.375 (9.5)                 | -                            | -                           | -                        | 2              | 1500            | B30-R6000   |
| Fig. 2  | B33-136-499      | B-499  | White  | 1.500 (38.1)               | 0.750 (19.1)                | -                            | 0.875 (22.2)                | 1.770 (45.0)             | 1              | 1500            | B30-R6000   |
| Fig. 2  | B33-137-499      | B-499  | White  | 2.000 (50.8)               | 1.000 (25.4)                | -                            | 1.125 (28.6)                | 2.200 (55.9)             | 1              | 1100            | B30-R6000   |
| Fig. 2  | B33-125-499      | B-499  | White  | 2.000 (50.8)               | 0.250 (6.4)                 | -                            | -                           | -                        | 1              | 1500            | B30-R6000   |
| <b>Polyester - Ultra-aggressive adhesive for highly textured and low surface energy surfaces (B-483):</b> |                  |        |        |                            |                             |                              |                             |                          |                |                 |             |
| Fig. 1  | B33-149-483      | B-483  | White  | 0.500 (12.7)               | 0.500 (12.7)                | 0.600 (15.2)                 | 0.600 (15.2)                | 2.500 (63.5)             | 4              | 5000            | B30-R6000   |
| Fig. 1  | B33-5-483        | B-483  | White  | 1.000 (25.4)               | 0.500 (12.7)                | 1.075 (27.3)                 | 0.600 (15.2)                | 3.350 (85.1)             | 3              | 5000            | B30-R6000   |
| Fig. 2  | B33-17-483       | B-483  | White  | 2.000 (50.8)               | 1.000 (25.4)                | -                            | 1.125 (28.6)                | 2.200 (55.9)             | 1              | 1500            | B30-R6000   |
| Fig. 2  | B33-7-483        | B-483  | White  | 2.750 (69.9)               | 1.250 (31.8)                | -                            | 1.375 (34.9)                | 2.950 (74.9)             | 1              | 1000            | B30-R6000   |
| Fig. 2  | B33-18-483       | B-483  | White  | 3.000 (76.2)               | 1.000 (25.4)                | -                            | 1.125 (28.6)                | 3.200 (81.3)             | 1              | 1500            | B30-R6000   |
| Fig. 2  | B33-19-483       | B-483  | White  | 3.000 (76.2)               | 2.000 (50.8)                | -                            | 2.125 (54.0)                | 3.200 (81.3)             | 1              | 500             | B30-R6000   |
| Fig. 2  | B33-55-483       | B-483  | White  | 4.000 (101.6)              | 2.000 (50.8)                | -                            | 2.125 (54.0)                | 4.200 (106.7)            | 1              | 750             | B30-R6000   |
| <b>Polyester - Ultra-aggressive adhesive and pliable for conforming to angular surfaces (B-484A):</b>     |                  |        |        |                            |                             |                              |                             |                          |                |                 |             |
| Fig. 2  | B33-125-484      | B-484A | White  | 0.900 (22.9)               | 0.500 (12.7)                | -                            | 0.600 (15.2)                | 1.100 (27.9)             | 1              | 1500            | B30-R6000   |
| Fig. 1  | B33-5-484        | B-484A | White  | 1.000 (25.4)               | 0.500 (12.7)                | 1.075 (27.3)                 | 0.600 (15.2)                | 3.350 (85.1)             | 3              | 5000            | B30-R6000   |
| Fig. 2  | B33-136-484      | B-484A | White  | 1.500 (38.1)               | 0.750 (19.1)                | -                            | 0.875 (22.2)                | 1.700 (43.2)             | 1              | 1500            | B30-R6000   |
| Fig. 2  | B33-17-484       | B-484A | White  | 2.000 (50.8)               | 1.000 (25.4)                | -                            | 1.125 (28.6)                | 2.200 (55.9)             | 1              | 1500            | B30-R6000   |
| Fig. 2  | B33-18-484       | B-484A | White  | 3.000 (76.2)               | 1.000 (25.4)                | -                            | 1.125 (28.6)                | 3.200 (81.3)             | 1              | 1500            | B30-R6000   |
| Fig. 2  | B33-19-484       | B-484A | White  | 3.000 (76.2)               | 2.000 (50.8)                | -                            | 2.125 (54.0)                | 3.200 (81.3)             | 1              | 500             | B30-R6000   |
| <b>Continuous cut-to-length vinyl - Permanent adhesive, conformable; indoor / outdoor grade (B-595*):</b> |                  |        |        |                            |                             |                              |                             |                          |                |                 |             |
| Fig. 3  | B30C-500-595-WT  | B-595  | White  | 0.500 (12.7)               | 100 ft. (30.5m)             | -                            | -                           | 0.700 (17.8)             | 1 roll (cont.) |                 | B30-R10000  |
| Fig. 3  | B30C-1125-595-WT | B-595  | White  | 1.125 (28.6)               | 100 ft. (30.5m)             | -                            | -                           | 1.375 (34.9)             | 1 roll (cont.) |                 | B30-R10000  |
| Fig. 3  | B30C-500-595-YL  | B-595  | Yellow | 0.500 (12.7)               | 100 ft. (30.5m)             | -                            | -                           | 0.700 (17.8)             | 1 roll (cont.) |                 | B30-R10000  |
| Fig. 3  | B30C-1125-595-YL | B-595  | Yellow | 1.125 (28.6)               | 100 ft. (30.5m)             | -                            | -                           | 1.375 (34.9)             | 1 roll (cont.) |                 | B30-R10000  |

\* 46 additional sizes and colors available for B-595 (page 24)

All part numbers above are compatible with BradyPrinter i3300 and BBP®33. Parts may also be compatible with BradyPrinter S3000, BradyPrinter S3100, BBP®30, BBP®31, BBP®35 and BBP®37 printers. Visit BradyID.com to confirm compatibility.

## ToughStripe® Printable Floor Marking Tape (B-483 with overlamine)

- Revolutionary B-483 material has ultra-aggressive adhesive
- Withstands forklift and pallet jack traffic without tearing or lifting
- Each roll ships with a roll of clear overlamine which must be applied over printed label and on to appropriate surface for best performance

Service temp: -40° to 248° F  
Agency approvals:  




Figure 3



| Diagram | Catalog #          | B#    | Color  | Label Width A<br>Inch (mm) | Roll Length B<br>Feet (m) | Labels Per Roll | Rec. Ribbon  |
|---------|--------------------|-------|--------|----------------------------|---------------------------|-----------------|--------------|
| Fig. 3  | B30C-1125-483WT-KT | B-483 | White  | 1.125 (28.6)               | 100 (30.5)                | 1 roll (cont.)  | B30-R6000    |
| Fig. 3  | B30C-2250-483WT-KT | B-483 | White  | 2.250 (57.5)               | 100 (30.5)                | 1 roll (cont.)  | B30-R6000    |
| Fig. 3  | B30C-3000-483WT-KT | B-483 | White  | 3.000 (76.2)               | 100 (30.5)                | 1 roll (cont.)  | B30-R6000    |
| Fig. 3  | B30C-4000-483WT-KT | B-483 | White  | 4.000 (101.6)              | 100 (30.5)                | 1 roll (cont.)  | B30-R6000    |
| Fig. 3  | B30C-1125-483YL-KT | B-483 | Yellow | 1.125 (28.6)               | 100 (30.5)                | 1 roll (cont.)  | B30-R6000    |
| Fig. 3  | B30C-2250-483YL-KT | B-483 | Yellow | 2.250 (57.5)               | 100 (30.5)                | 1 roll (cont.)  | B30-R6000    |
| Fig. 3  | B30C-3000-483YL-KT | B-483 | Yellow | 3.000 (76.2)               | 100 (30.5)                | 1 roll (cont.)  | B30-R6000    |
| Fig. 3  | B30C-4000-483YL-KT | B-483 | Yellow | 4.000 (101.6)              | 100 (30.5)                | 1 roll (cont.)  | B30-R6000    |
| Fig. 3  | B30C-1125-483RD-KT | B-483 | Red    | 1.125 (28.6)               | 100 (30.5)                | 1 roll (cont.)  | B30-R4400-WT |
| Fig. 3  | B30C-2250-483RD-KT | B-483 | Red    | 2.250 (57.5)               | 100 (30.5)                | 1 roll (cont.)  | B30-R4400-WT |
| Fig. 3  | B30C-4000-483RD-KT | B-483 | Red    | 4.000 (101.6)              | 100 (30.5)                | 1 roll (cont.)  | B30-R4400-WT |
| Fig. 3  | B30C-1125-483BL-KT | B-483 | Blue   | 1.125 (28.6)               | 100 (30.5)                | 1 roll (cont.)  | B30-R4400-WT |
| Fig. 3  | B30C-2250-483BL-KT | B-483 | Blue   | 2.250 (57.5)               | 100 (30.5)                | 1 roll (cont.)  | B30-R4400-WT |
| Fig. 3  | B30C-4000-483BL-KT | B-483 | Blue   | 4.000 (101.6)              | 100 (30.5)                | 1 roll (cont.)  | B30-R4400-WT |
| Fig. 3  | B30C-1125-483GN-KT | B-483 | Green  | 1.125 (28.6)               | 100 (30.5)                | 1 roll (cont.)  | B30-R4400-WT |
| Fig. 3  | B30C-2250-483GN-KT | B-483 | Green  | 2.250 (57.5)               | 100 (30.5)                | 1 roll (cont.)  | B30-R4400-WT |
| Fig. 3  | B30C-4000-483GN-KT | B-483 | Green  | 4.000 (101.6)              | 100 (30.5)                | 1 roll (cont.)  | B30-R4400-WT |
| Fig. 3  | B30C-1125-483BK-KT | B-483 | Black  | 1.125 (28.6)               | 100 (30.5)                | 1 roll (cont.)  | B30-R4400-WT |
| Fig. 3  | B30C-2250-483BK-KT | B-483 | Black  | 2.250 (57.5)               | 100 (30.5)                | 1 roll (cont.)  | B30-R4400-WT |
| Fig. 3  | B30C-4000-483BK-KT | B-483 | Black  | 4.000 (101.6)              | 100 (30.5)                | 1 roll (cont.)  | B30-R4400-WT |
| Fig. 3  | B30C-1125-483OR-KT | B-483 | Orange | 1.125 (28.6)               | 100 (30.5)                | 1 roll (cont.)  | B30-R6000    |
| Fig. 3  | B30C-2250-483OR-KT | B-483 | Orange | 2.250 (57.5)               | 100 (30.5)                | 1 roll (cont.)  | B30-R6000    |
| Fig. 3  | B30C-4000-483OR-KT | B-483 | Orange | 4.000 (101.6)              | 100 (30.5)                | 1 roll (cont.)  | B30-R6000    |

ToughStripe part numbers above are compatible with BradyPrinter i3300, BradyPrinter S3000, BradyPrinter S3100, and BBP®35 and BBP®37 printers. ToughStripe material is not compatible with BBP®30, BBP®33 and BBP®31 printers.

## Cold Temperature Application Material (B-549)

- Special adhesive permanently adheres to extremely cold surfaces
- Can be applied in -10° F and lasts in -40° F
- Ideal for cold storage warehouses, coolers, freezers and short-term winter outdoor use

Service temp: -40° to 212° F  
Application temp: -10° to 212° F  
Average outdoor durability: Up to 1 year




Figure 3



| Diagram | Catalog #        | B#    | Color  | Label Width A<br>Inch (mm) | Roll Length B<br>Feet (m) | Labels Per Roll | Rec. Ribbon |
|---------|------------------|-------|--------|----------------------------|---------------------------|-----------------|-------------|
| Fig. 3  | B30C-1125-549-WT | B-549 | White  | 1.125 (28.6)               | 100 (30.5)                | 1 roll (cont.)  | B30-R10000  |
| Fig. 3  | B30C-2250-549-WT | B-549 | White  | 2.250 (57.5)               | 100 (30.5)                | 1 roll (cont.)  | B30-R10000  |
| Fig. 3  | B30C-4000-549-WT | B-549 | White  | 4.000 (101.6)              | 100 (30.5)                | 1 roll (cont.)  | B30-R10000  |
| Fig. 3  | B30C-1125-549-YL | B-549 | Yellow | 1.125 (28.6)               | 100 (30.5)                | 1 roll (cont.)  | B30-R10000  |
| Fig. 3  | B30C-2250-549-YL | B-549 | Yellow | 2.250 (57.5)               | 100 (30.5)                | 1 roll (cont.)  | B30-R10000  |
| Fig. 3  | B30C-4000-549-YL | B-549 | Yellow | 4.000 (101.6)              | 100 (30.5)                | 1 roll (cont.)  | B30-R10000  |







All part numbers above are compatible with BradyPrinter i3300 and BBP®33. Parts may also be compatible with BradyPrinter S3000, BradyPrinter S3100, BBP®30, BBP®31, BBP®35 and BBP®37 printers. Visit BradyID.com to confirm compatibility.



## Cryogenic Tube and Vial Labels (B-461, B-490, B-492 and B-7425)

FreezerBondz™ labels can be applied to room temperature or already frozen samples, with a small overlap. The label remains legible and will stick to the tube during processing, even when immersed in liquid or vapor phase nitrogen and ultra-low temperature freezer storage.

- **B-461 Self-Laminating Polyester:** Ultra-thin polyester label with clear overlaminated tail that protects print and allows liquid levels to be visible
- **B-490 Polyester:** White FreezerBondz label ideal for flat frozen surfaces. Adheres to frozen tubes and vials when wrapped around itself by at least 1/8"
- **B-492 Polyester:** FreezerBondz ultra-thin white polyester label for labeling of frosted/frozen or room temperature vials, tubes and canes. Superior chemical and abrasion resistance
- **B-7425 Polypropylene:** Ideal for labeling dry, room temperature specimen containers. Material withstands temperature ranges from -320° to 248° F (-196° to 121° C). Chemical resistance to ethanol, DMSO, IPS, short-term xylene, 10% formalin, 50% acetic acid and toluene



| Diagram                                   | Catalog #    | B#     | Color | Label Width A<br>Inch (mm) | Label Height B<br>Inch (mm) | Print-On Height C<br>Inch (mm) | Labels Per Row | Labels Per Roll | Rec. Ribbon |
|---|--------------|--------|-------|----------------------------|-----------------------------|--------------------------------|----------------|-----------------|-------------|
| <b>Self-Laminating Polyester (B-461):</b> |              |        |       |                            |                             |                                |                |                 |             |
| Fig. 15c                                  | B33-127-461  | B-461  | White | 0.500 (12.7)               | 2.200 (55.9)                | 0.750 (19.1)                   | 1              | 1500            | B30-R4300   |
| Fig. 15c                                  | B33-133-461  | B-461  | White | 0.600 (15.2)               | 1.625 (41.3)                | 1.000 (25.4)                   | 1              | 1500            | B30-R4300   |
| Fig. 14c                                  | B33-139-461  | B-461  | White | 1.000 (25.4)               | 5.250 (133.4)               | 1.500 (38.1)                   | 2              | 650             | B30-R4300   |
| Fig. 15c                                  | B33-123-461  | B-461  | White | 1.800 (45.7)               | 0.375 (9.5)                 | 0.750 (19.1)                   | 1              | 1500            | B30-R4300   |
| Fig. 15c                                  | B33-122-461  | B-461  | White | 1.800 (45.7)               | 0.500 (12.7)                | 0.750 (19.1)                   | 1              | 1500            | B30-R4300   |
| Fig. 14c                                  | B33-276-461  | B-461  | White | 2.625 (66.7)               | 1.000 (25.4)                | 1.000 (25.4)                   | 1              | 1500            | B30-R4300   |
| Fig. 15c                                  | B33-134-461  | B-461  | White | 3.500 (88.9)               | 1.500 (38.1)                | 1.250 (31.8)                   | 1              | 1000            | B30-R4300   |
| <b>Polyester (B-490):</b>                 |              |        |       |                            |                             |                                |                |                 |             |
| Fig. 7                                    | B33-126-490  | B-490  | White | 0.900 (22.9)               | 0.500 (12.7)                | 0.500 (12.7) dia.              | 1              | 2500            | B30-R4300   |
| Fig. 2                                    | B33-154-490  | B-490  | White | 1.250 (31.8)               | 0.375 (9.5)                 | -                              | 1              | 1500            | B30-R4300   |
| Fig. 2                                    | B33-155-490  | B-490  | White | 1.625 (41.3)               | 0.600 (15.2)                | -                              | 1              | 1500            | B30-R4300   |
| Fig. 2                                    | B33-156-490  | B-490  | White | 1.900 (48.2)               | 1.000 (25.4)                | -                              | 1              | 1500            | B30-R4300   |
| Fig. 2                                    | B33-157-490  | B-490  | White | 2.200 (55.9)               | 1.500 (38.1)                | -                              | 1              | 1000            | B30-R4300   |
| Fig. 2                                    | B33-158-490  | B-490  | White | 3.750 (95.3)               | 1.750 (44.4)                | -                              | 1              | 1100            | B30-R4300   |
| <b>Polyester (B-492):</b>                 |              |        |       |                            |                             |                                |                |                 |             |
| Fig. 5                                    | B33-143-492  | B-492  | White | 0.375 (9.5) dia.           | -                           | -                              | 4              | 1500            | B30-R6400   |
| Fig. 7                                    | B33-182-492  | B-492  | White | 0.500 (12.7)               | 1.000 (25.4)                | 0.44 (11.17) dia               | 1              | 1500            | B30-R6400   |
| Fig. 2                                    | B33-180-492  | B-492  | White | 0.900 (22.9)               | 1.000 (25.4)                | -                              | 1              | 1500            | B30-R6400   |
| Fig. 25a                                  | B33-152-492  | B-492  | White | 1.000 (25.4)               | 0.375 (9.5)                 | -                              | 2              | 2500            | B30-R6400   |
| Fig. 7                                    | B33-163-492  | B-492  | White | 1.000 (25.4)               | 0.375 (9.5)                 | 0.375 (9.5) dia.               | 1              | 1500 sets       | B30-R6400   |
| Fig. 7                                    | B33-181-492  | B-492  | White | 1.000 (25.4)               | 0.500 (12.7)                | 0.50 (12.7) dia                | 1              | 1500 sets       | B30-R6400   |
| Fig. 2                                    | B33-59-492   | B-492  | White | 1.000 (25.4)               | 0.500 (12.7)                | -                              | 1              | 5000            | B30-R6400   |
| Fig. 2                                    | B33-179-492  | B-492  | White | 1.000 (25.4)               | 1.000 (25.4)                | -                              | 1              | 1900            | B30-R6400   |
| Fig. 2                                    | B33-156-492  | B-492  | White | 1.900 (48.3)               | 1.000 (25.4)                | -                              | 1              | 1500            | B30-R6400   |
| <b>Polypropylene (B-7425):</b>            |              |        |       |                            |                             |                                |                |                 |             |
| Fig. 2                                    | B33-257-7425 | B-7425 | White | 0.825 (21.0)               | 0.250 (6.4)                 | -                              | 1              | 1500            | B30-R4300   |
| Fig. 25a                                  | B33-152-7425 | B-7425 | White | 1.000 (25.4)               | 0.375 (9.5)                 | -                              | 2              | 2000            | B30-R4300   |
| Fig. 2                                    | B33-59-7425  | B-7425 | White | 1.000 (25.4)               | 0.500 (12.7)                | -                              | 1              | 2000            | B30-R4300   |
| Fig. 25a                                  | B33-88-7425  | B-7425 | White | 1.000 (25.4)               | 0.750 (19.1)                | -                              | 2              | 2000            | B30-R4300   |
| Fig. 2                                    | B33-256-7425 | B-7425 | White | 1.300 (33.0)               | 0.600 (15.2)                | -                              | 1              | 1500            | B30-R4300   |
| Fig. 25a                                  | B33-37-7425  | B-7425 | White | 1.500 (38.1)               | 0.500 (12.7)                | -                              | 2              | 1500            | B30-R4300   |

All part numbers above are compatible with BradyPrinter i3300 and BBP®33. Parts may also be compatible with BradyPrinter S3000, BradyPrinter S3100, BBP®30, BBP®31, BBP®35 and BBP®37 printers. Visit BradyID.com to confirm compatibility.

## Centrifuge and PCR Tube Labels (B-499 and B-7425)

Designed with ultra-thin material that prevents vials from jamming in centrifuges or racks, these labels withstand harsh temperatures and chemicals without falling off, fading or smearing.

- **B-499 Nylon Cloth:** Thick white nylon cloth for easy handling and conformability
- **B-7425 Polypropylene:** Moderate chemical resistance, ideal for labeling dry, room temperature specimen containers that withstand temperature ranges from -320° to 248° F (-196° to 121° C). Chemical resistance to ethanol, DMSO, IPS, short-term xylene, 10% formalin, 50% acetic acid and toluene




Figure 2




Figure 5




Figure 24



| Diagram                        | Catalog #    | B#     | Color | Label Width A<br>Inch (mm) | Label Height B<br>Inch (mm) | Vial Top Dia. C<br>Inch (mm) | Labels<br>Per Row | Labels<br>Per Roll | Rec. Ribbon |
|--------------------------------|--------------|--------|-------|----------------------------|-----------------------------|------------------------------|-------------------|--------------------|-------------|
| <b>Nylon Cloth (B-499):</b>    |              |        |       |                            |                             |                              |                   |                    |             |
| Fig. 5                         | B33-143-499  | B-499  | White | 0.375 (9.5)                | -                           | -                            | 4                 | 1500               | B30-R6000   |
| Fig. 5                         | B33-144-499  | B-499  | White | 0.500 (12.7)               | -                           | -                            | 3                 | 1500               | B30-R6000   |
| <b>Polypropylene (B-7425):</b> |              |        |       |                            |                             |                              |                   |                    |             |
| Fig. 2                         | B33-257-7425 | B-7425 | White | 0.825 (21.0)               | 0.250 (6.4)                 | -                            | 1                 | 1500               | B30-R4300   |
| Fig. 2                         | B33-152-7425 | B-7425 | White | 1.000 (25.4)               | 0.375 (9.5)                 | -                            | 2                 | 2000               | B30-R4300   |
| Fig. 24                        | B33-249-7425 | B-7425 | White | 1.000 (25.4)               | 0.375 (9.5)                 | 0.375 (9.5) dia.             | 1                 | 1500               | B30-R4300   |
| Fig. 2                         | B33-59-7425  | B-7425 | White | 1.000 (25.4)               | 0.500 (12.7)                | -                            | 1                 | 2000               | B30-R4300   |
| Fig. 24                        | B33-251-7425 | B-7425 | White | 1.000 (25.4)               | 0.500 (12.7)                | 0.440 (11.1) dia.            | 1                 | 1500               | B30-R4300   |
| Fig. 2                         | B33-179-7425 | B-7425 | White | 1.000 (25.4)               | 1.000 (25.4)                | -                            | 1                 | 1500               | B30-R4300   |
| Fig. 2                         | B33-256-7425 | B-7425 | White | 1.300 (33.0)               | 0.600 (15.2)                | -                            | 1                 | 1500               | B30-R4300   |
| Fig. 2                         | B33-37-7425  | B-7425 | White | 1.500 (38.1)               | 0.500 (12.7)                | -                            | 2                 | 1500               | B30-R4300   |
| Fig. 2                         | B33-136-7425 | B-7425 | White | 1.500 (38.1)               | 0.750 (19.1)                | -                            | 1                 | 1500               | B30-R4300   |
| Fig. 2                         | B33-258-7425 | B-7425 | White | 1.500 (38.1)               | 1.750 (44.5)                | -                            | 1                 | 900                | B30-R4300   |
| Fig. 2                         | B33-137-7425 | B-7425 | White | 2.000 (50.8)               | 1.000 (25.4)                | -                            | 1                 | 1500               | B30-R4300   |

## Microscope Slide Labels (B-481)

- Designed specifically to identify slides and to resist exposure to harsh chemicals during the slide-staining process
- Performs well in stains such as hematoxylin and eosin
- Extreme chemical resistance withstands the rigors of typical deparaffinization, including ethanol, xylene and H&E staining processes




Figure 2




Figure 25





| Diagram | Catalog #   | B#    | Color | Label Width A<br>Inch (mm) | Label Height B<br>Inch (mm) | Labels<br>Per Row | Labels<br>Per Roll | Rec. Ribbon |
|---------|-------------|-------|-------|----------------------------|-----------------------------|-------------------|--------------------|-------------|
| Fig. 2  | B33-194-481 | B-481 | White | 0.900 (22.9)               | 0.750 (19.1)                | 1                 | 2000               | B30-R6400   |
| Fig. 25 | B33-141-481 | B-481 | White | 0.900 (22.9)               | 0.900 (22.9)                | 2                 | 1500               | B30-R6400   |

All part numbers above are compatible with BradyPrinter i3300 and BBP®33. Parts may also be compatible with BradyPrinter S3000, BradyPrinter S3100, BBP®30, BBP®31, BBP®35 and BBP®37 printers. Visit BradyID.com to confirm compatibility.

## Dissolvable Paper Labels (B-403)


- Designed for temporary applications where easy removal, re-identification or waste reduction are valued
- Ideal for labeling vials, tubes or general glassware, temporary asset tracking, animal housing identification, and general use
- Completely dissolves in warm water within 30 seconds, leaving no adhesive residue

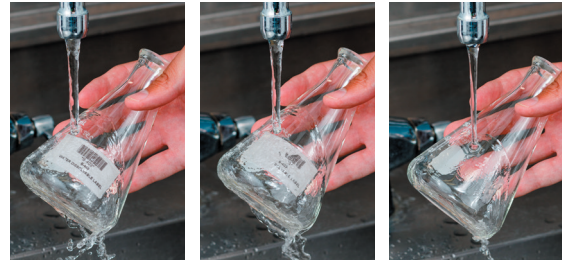

| Diagram | Catalog #        | B#    | Color | Label Width A Inch (mm) | Roll Length B Inch (mm) | Labels Per Roll | Rec. Ribbon |
|---------|------------------|-------|-------|-------------------------|-------------------------|-----------------|-------------|
| Fig. 3  | B30C-1125-403-WT | B-403 | White | 1.125 (28.575)          | 100 (30.5)              | 1 (cont.)       | B30-R4300   |
| Fig. 3  | B30C-2250-403-WT | B-403 | White | 2.250 (57.15)           | 100 (30.5)              | 1 (cont.)       | B30-R4300   |
| Fig. 3  | B30C-3000-403-WT | B-403 | White | 3.000 (76.2)            | 100 (30.5)              | 1 (cont.)       | B30-R4300   |
| Fig. 3  | B30C-4000-403-WT | B-403 | White | 4.000 (101.6)           | 100 (30.5)              | 1 (cont.)       | B30-R4300   |

## Sterilization Indicating Labels (B-7425-AC)

- Specially designed with a pre-printed “sterilized” header that indicates steam sterilization with a color-changing pre-printed header when autoclaved at 250.7° F (121.5° C) for 10 minutes
- Withstands temperature ranges from -320° to 248° F (-196° to 121° C)
- For use in LN<sub>2</sub>, freezers, autoclave and hot water baths
- Chemical resistance to ethanol, DMSO, IPS, short-term xylene, 10% formalin, 50% acetic acid and toluene




Note: Label dimensions include the “Sterilized” indicating area.

| Diagram  | Catalog #       | B#        | Color | Label Width A Inch (mm) | Label Height B Inch (mm) | Labels Per Row | Labels Per Roll | Rec. Ribbon |
|----------|-----------------|-----------|-------|-------------------------|--------------------------|----------------|-----------------|-------------|
| Fig. 29a | B33-235-7425-AC | B-7425-AC | White | 1.500 (38.1)            | 1.000 (25.4) *           | 1              | 1250            | B30-R4300   |
| Fig. 29a | B33-137-7425-AC | B-7425-AC | White | 2.000 (50.8)            | 1.000 (25.4) *           | 1              | 1500            | B30-R4300   |

## Tissue Cassette Labels (B-482)

- White polyester label with superior resistance to tissue processing chemicals and embedding procedures. Use with the BSP™31 Label Attachment system for pre-process tissue cassette ID



| Diagram | Catalog #   | B#    | Color | Label Width A Inch (mm) | Label Height B Inch (mm) | Labels Per Row | Labels Per Roll | Rec. Ribbon |
|---------|-------------|-------|-------|-------------------------|--------------------------|----------------|-----------------|-------------|
| Fig. 2  | B33-199-482 | B-482 | White | 1.050 (26.7)            | 0.250 (6.4)              | 1              | 3000            | B30-R6400   |
| Fig. 2  | B33-213-482 | B-482 | White | 1.050 (26.7)            | 0.313 (8)                | 1              | 3000            | B30-R6400   |

All part numbers above are compatible with BradyPrinter i3300 and BBP®33. Parts may also be compatible with BradyPrinter S3000, BradyPrinter S3100, BBP®30, BBP®31, BBP®35 and BBP®37 printers. Visit BradyID.com to confirm compatibility.



## General Identification for Laboratory Storage, Equipment and Safety Labels (B-499, B-595, B-7569)

- Super strong adhesives and colors ideal for marking laboratory equipment, containers, hoses and lab storage cabinets, shelves and drawers
- GHS labels available for marking chemicals in the lab and shipment boxes when collaborating with other labs
- Pre-printed sign header labels make your safety and housekeeping reminders stand out and stay put!

**B-499:** Service temp: -40° to 193° F  
**B-595:** Service temp: -40° to 180° F  
**B-7569:** Service temp: -4° to 167° F

Agency approvals:   
 Agency approvals:

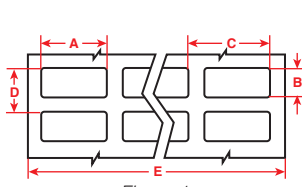


Figure 1




Figure 2




Figure 3




Figure 70

| Diagram  | Catalog #          | B#     | Color / Legend | Label Width A Inch (mm) | Label Height B Inch (mm) | Horiz. Repeat C Inch (mm) | Vert. Repeat D Inch (mm) | Web Width E Inch (mm) | Roll Length B Feet (m) | Labels Per Row | Labels Per Roll | Rec. Ribbon   |
|--|--------------------|--------|----------------|-------------------------|--------------------------|---------------------------|--------------------------|-----------------------|------------------------|----------------|-----------------|---------------|
| <b>Nylon Cloth - Permanent adhesive (B-499):</b>       |                    |        |                |                         |                          |                           |                          |                       |                        |                |                 |               |
| Fig. 1   | B33-68-499         | B-499  | White          | 0.500 (12.7)            | 0.750 (19.1)             | 0.600 (15.2)              | 0.875 (22.2)             | 2.500 (63.5)          | –                      | 4              | 1500            | B30-R6000     |
| Fig. 1   | B33-165-499        | B-499  | White          | 0.800 (20.3)            | 1.437 (36.5)             | 0.900 (22.9)              | 1.562 (39.7)             | 3.700 (94.0)          | –                      | 4              | 2500            | B30-R6000     |
| Fig. 2   | B33-125-499        | B-499  | White          | 0.900 (22.9)            | 0.500 (12.7)             | –                         | –                        | –                     | –                      | 1              | 1500            | B30-R6000     |
| Fig. 1   | B33-126-499        | B-499  | White          | 0.900 (22.9)            | 0.500 (12.7)             | –                         | –                        | –                     | –                      | 2              | 1500            | B30-R6000     |
| Fig. 2   | B33-163-499        | B-499  | White          | 1.000 (25.4)            | 0.375 (9.5)              | –                         | –                        | –                     | –                      | 1              | 1500            | B30-R6000     |
| Fig. 1   | B33-152-499        | B-499  | White          | 1.000 (25.4)            | 0.375 (9.5)              | –                         | –                        | –                     | –                      | 2              | 1500            | B30-R6000     |
| Fig. 2   | B33-136-499        | B-499  | White          | 1.500 (38.1)            | 0.750 (19.1)             | –                         | 0.875 (22.2)             | 1.770 (45.0)          | –                      | 1              | 1500            | B30-R6000     |
| Fig. 2   | B33-137-499        | B-499  | White          | 2.000 (50.8)            | 1.000 (25.4)             | –                         | 1.125 (28.6)             | 2.200 (55.9)          | –                      | 1              | 1100            | B30-R6000     |
| Fig. 2   | B33-125-499        | B-499  | White          | 2.000 (50.8)            | 0.250 (6.4)              | –                         | –                        | –                     | –                      | 1              | 1500            | B30-R6000     |
| <b>Indoor/Outdoor Vinyl (B-595):</b>                   |                    |        |                |                         |                          |                           |                          |                       |                        |                |                 |               |
| Fig. 3   | B30C-500-595-WT    | B-595  | White          | 0.500 (12.7)            | –                        | –                         | –                        | –                     | 100 (30.5)             | –              | 1 roll (cont.)  | B30-R10000    |
| Fig. 3   | B30C-1125-595-WT   | B-595  | White          | 1.125 (28.6)            | –                        | –                         | –                        | –                     | 100 (30.5)             | –              | 1 roll (cont.)  | B30-R10000    |
| Fig. 3   | B30C-500-595-YL    | B-595  | Yellow         | 0.500 (12.7)            | –                        | –                         | –                        | –                     | 100 (30.5)             | –              | 1 roll (cont.)  | B30-R10000    |
| Fig. 3   | B30C-1125-595-YL   | B-595  | Yellow         | 1.125 (28.6)            | –                        | –                         | –                        | –                     | 100 (30.5)             | –              | 1 roll (cont.)  | B30-R10000    |
| Fig. 3   | B30C-500-595-RD    | B-595  | Red            | 0.500 (12.7)            | –                        | –                         | –                        | –                     | 100 (30.5)             | –              | 1 roll (cont.)  | B30-R10000-WT |
| Fig. 3   | B30C-1125-595-RD   | B-595  | Red            | 1.125 (28.6)            | –                        | –                         | –                        | –                     | 100 (30.5)             | –              | 1 roll (cont.)  | B30-R10000-WT |
| Fig. 3   | B30C-500-595-BL    | B-595  | Blue           | 0.500 (12.7)            | –                        | –                         | –                        | –                     | 100 (30.5)             | –              | 1 roll (cont.)  | B30-R10000-WT |
| Fig. 3   | B30C-1125-595-BL   | B-595  | Blue           | 1.125 (28.6)            | –                        | –                         | –                        | –                     | 100 (30.5)             | –              | 1 roll (cont.)  | B30-R10000-WT |
| Fig. 3   | B30C-500-595-GN    | B-595  | Green          | 0.500 (12.7)            | –                        | –                         | –                        | –                     | 100 (30.5)             | –              | 1 roll (cont.)  | B30-R10000-WT |
| Fig. 3   | B30C-1125-595-GN   | B-595  | Green          | 1.125 (28.6)            | –                        | –                         | –                        | –                     | 100 (30.5)             | –              | 1 roll (cont.)  | B30-R10000-WT |
| <b>Pre-Printed Pre-Cut Blank Sign Headers (B-595):</b> |                    |        |                |                         |                          |                           |                          |                       |                        |                |                 |               |
| Fig. 70  | B30-241-595-ANSIDA | B-595  |                | 2.250 (57.5)            | 3.000 (76.2)             | –                         | –                        | –                     | –                      | 1              | 300             | B30-R10000    |
| Fig. 70  | B30-25-595-ANSIDA  | B-595  |                | 4.000 (101.6)           | 6.000 (152.4)            | –                         | –                        | –                     | –                      | 1              | 175             | B30-R10000    |
| Fig. 70  | B30-241-595-ANSINO | B-595  |                | 2.250 (57.5)            | 3.000 (76.2)             | –                         | –                        | –                     | –                      | 1              | 300             | B30-R10000    |
| Fig. 70  | B30-25-595-ANSINO  | B-595  |                | 4.000 (101.6)           | 6.000 (152.4)            | –                         | –                        | –                     | –                      | 1              | 175             | B30-R10000    |
| <b>Pre-Printed GHS/CLP Chemical (B-7569):</b>          |                    |        |                |                         |                          |                           |                          |                       |                        |                |                 |               |
| L4B Diamond + Text                                     | B30-260-7569-CLP4B | B-7569 |                | 2.170 (55.0)            | 3.350 (85.0)             | –                         | –                        | –                     | –                      | 1              | 340             | B30-R10000    |
| L4B Diamond + Text                                     | B30-261-7569-CLP4B | B-7569 |                | 2.950 (75.0)            | 4.330 (110.0)            | –                         | –                        | –                     | –                      | 1              | 270             | B30-R10000    |
| L4C Diamond + Text                                     | B30-18-7569-CLP4C  | B-7569 |                | 1.000 (25.4)            | 3.000 (76.2)             | –                         | –                        | –                     | –                      | 1              | 1000            | B30-R10000    |


(B-595) U.S. Patent Nos. 5,823,689; 6,570,602. Additional Patents Pending, more parts on page 24. For more sign headers see pages 23 and 26. And for more GHS labels see page 29.

All part numbers above are compatible with BradyPrinter i3300 and BBP®33. Parts may also be compatible with BradyPrinter S3000, BradyPrinter S3100, BBP®30, BBP®31, BBP®35 and BBP®37 printers. Visit BradyID.com to confirm compatibility.

# Print ribbons

## “Drop and Click” print ribbons for 5-second ribbon supply changes

- Tough, smear-proof ribbons that produce long-lasting printed text and can withstand years in industrial areas and outdoor conditions
- Self-contained cartridges drop straight into printer with a “click”
- No calibrating, no threading, no wasted feeding, no hassles and the ink will always be facing the right direction
- Printer notifies user if installed ribbon is not recommended for installed labels

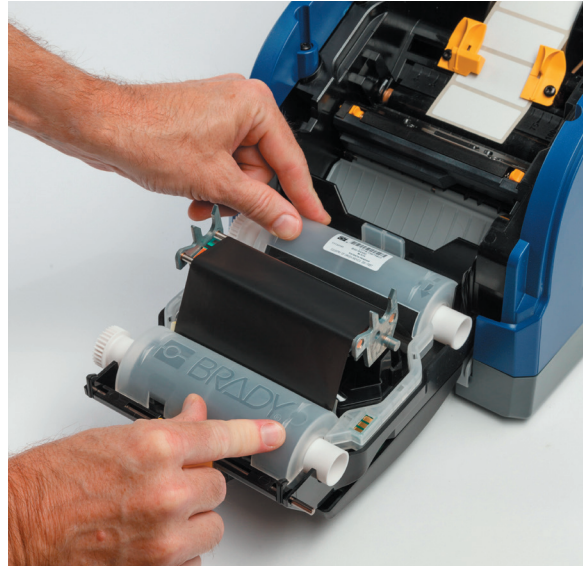

## Single Color Print Ribbons

| Catalog #         | Color              | Size Inch (mm) | Length Feet (m) |
|-------------------|--------------------|----------------|-----------------|
| B30-R10000        | Black              | 4.330 (109.9)  | 200 (60.9)      |
| B30-R6000         | Black              | 4.330 (109.9)  | 200 (60.9)      |
| B30-R6200         | Black              | 4.330 (109.9)  | 200 (60.9)      |
| B30-R6400         | Black              | 4.330 (109.9)  | 200 (60.9)      |
| B30-R6600         | Black              | 4.330 (109.9)  | 200 (60.9)      |
| B30-R4300         | Black              | 4.330 (109.9)  | 200 (60.9)      |
| B30-R10000-WT     | White              | 4.330 (109.9)  | 200 (60.9)      |
| B30-R4400-WT      | White              | 4.330 (109.9)  | 200 (60.9)      |
| B30-R6700-WT      | White*             | 4.330 (109.9)  | 200 (60.9)      |
| B30-R4500-SV      | Silver*            | 4.330 (109.9)  | 200 (60.9)      |
| B30-R10000-RD     | Red                | 4.330 (109.9)  | 200 (60.9)      |
| B30-R10000-GN     | Green              | 4.330 (109.9)  | 200 (60.9)      |
| B30-R10000-BL     | Blue               | 4.330 (109.9)  | 200 (60.9)      |
| B30-R10000-YL     | Yellow**           | 4.330 (109.9)  | 200 (60.9)      |
| B30-R10000-YL2    | Yellow**           | 4.330 (109.9)  | 200 (60.9)      |
| B30-R10000-OR     | Orange             | 4.330 (109.9)  | 200 (60.9)      |
| B30-R10000-MA     | Magenta            | 4.330 (109.9)  | 200 (60.9)      |
| B30-R10000-PRCCY  | Process Cyan***    | 4.330 (109.9)  | 200 (60.9)      |
| B30-R10000-PRCYEL | Process Yellow***  | 4.330 (109.9)  | 200 (60.9)      |
| B30-R10000-PRCMAG | Process Magenta*** | 4.330 (109.9)  | 200 (60.9)      |

\* B30-R4500-SV ribbon for use with B-342 black sleeves only; B30-R6700-WT ribbon for use with B-345 black sleeves only.

\*\* B30-R10000-YL for printing yellow onto white. B30-R10000-YL2 for printing yellow onto other colors of B-595.

\*\*\* Process ribbons print a much lighter shade. They are designed to be used together with other process ribbons and black ribbon to lay down a dot pattern for printing “blended” colors and process color objects with the BBP35 or BBP37 printers.



# Print ribbon / label material compatibility

| B-# Material |   | B30-R4300<br>(Black) | B30-R6000<br>(Black) | B30-R6200<br>(Black) | B30-R6400<br>(Black) | B30-R6600<br>(Black) | B30-R10000<br>(Black) | B30-R4500-SV*<br>(Silver) | B30-R4400-WT<br>(White) | B30-R6700-WT*<br>(White) | B30-R10000-WT<br>(White) | B30-R10000-YL<br>(Yellow) | B30-R10000-YL2<br>(Yellow) | B30-R10000<br>(Colors) |
|--------------|---|----------------------|----------------------|----------------------|----------------------|----------------------|-----------------------|---------------------------|-------------------------|--------------------------|--------------------------|---------------------------|----------------------------|------------------------|
| B-342        | Polyolefin                                | ●                    | -                    | -                    | -                    | -                    | -                     | ●                         | -                       | -                        | -                        | -                         | -                          | -                      |
| B-344        | Polyolefin                                | -                    | -                    | -                    | -                    | ●                    | -                     | -                         | -                       | ●                        | -                        | -                         | -                          | -                      |
| B-345        | Polyolefin                                | -                    | ●                    | -                    | -                    | -                    | -                     | -                         | ●                       | -                        | -                        | -                         | -                          | -                      |
| B-403        | Paper                                     | ●                    | -                    | -                    | -                    | -                    | -                     | -                         | -                       | -                        | -                        | -                         | -                          | -                      |
| B-422        | Polyester                                 | -                    | ●                    | -                    | -                    | -                    | -                     | -                         | ●                       | -                        | -                        | -                         | -                          | -                      |
| B-423        | Glossy White Polyester                    | -                    | ●                    | ●                    | -                    | -                    | -                     | -                         | -                       | -                        | -                        | -                         | -                          | -                      |
| B-424        | Matte White Paper                         | ●                    | -                    | -                    | -                    | -                    | -                     | -                         | -                       | -                        | -                        | -                         | -                          | -                      |
| B-425        | Polypropylene                             | ●                    | -                    | -                    | ●                    | -                    | -                     | -                         | -                       | -                        | -                        | -                         | -                          | -                      |
| B-427        | Vinyl                                     | ●                    | -                    | -                    | -                    | -                    | -                     | -                         | -                       | -                        | -                        | -                         | -                          | -                      |
| B-428        | Metallized Polyester                      | ●                    | -                    | -                    | -                    | -                    | -                     | -                         | -                       | -                        | -                        | -                         | -                          | -                      |
| B-430        | Polyester                                 | -                    | ●                    | -                    | -                    | -                    | -                     | -                         | -                       | -                        | -                        | -                         | -                          | -                      |
| B-432        | Glossy Clear Polyester                    | -                    | ●                    | -                    | -                    | -                    | -                     | -                         | ●                       | -                        | -                        | -                         | -                          | -                      |
| B-434        | Glossy Metallized Polyester               | -                    | ●                    | -                    | -                    | -                    | -                     | -                         | -                       | -                        | -                        | -                         | -                          | -                      |
| B-437        | Polyvinylfluoride                         | ●                    | -                    | -                    | -                    | -                    | -                     | -                         | -                       | -                        | -                        | -                         | -                          | -                      |
| B-438        | Tamper Evident Metallized Polyester       | ●                    | -                    | -                    | -                    | -                    | -                     | -                         | -                       | -                        | -                        | -                         | -                          | -                      |
| B-461        | Polyester                                 | ●                    | -                    | -                    | -                    | -                    | -                     | -                         | -                       | -                        | -                        | -                         | -                          | -                      |
| B-472        | Polyimide                                 | ●                    | -                    | -                    | -                    | -                    | -                     | -                         | -                       | -                        | -                        | -                         | -                          | -                      |
| B-481        | Polyester                                 | -                    | -                    | -                    | ●                    | -                    | -                     | -                         | -                       | -                        | -                        | -                         | -                          | -                      |
| B-482        | Polyester                                 | -                    | -                    | -                    | ●                    | -                    | -                     | -                         | -                       | -                        | -                        | -                         | -                          | -                      |
| B-483        | Glossy White Polyester                    | -                    | ●                    | -                    | -                    | -                    | -                     | -                         | -                       | -                        | -                        | -                         | -                          | -                      |
| B-483        | ToughStripe® Printable Floor Marking Tape | -                    | ●                    | -                    | -                    | -                    | -                     | -                         | ●                       | -                        | -                        | -                         | -                          | -                      |
| B-484A       | Glossy White Polyester                    | -                    | ●                    | -                    | -                    | -                    | -                     | -                         | -                       | -                        | -                        | -                         | -                          | -                      |
| B-486B       | Matte Metallized Polyester                | ●                    | -                    | -                    | -                    | -                    | -                     | -                         | -                       | -                        | -                        | -                         | -                          | -                      |
| B-489A       | Matte White Polyester                     | ●                    | -                    | -                    | -                    | -                    | -                     | -                         | -                       | -                        | -                        | -                         | -                          | -                      |
| B-490        | Polyester                                 | ●                    | -                    | -                    | -                    | -                    | -                     | -                         | -                       | -                        | -                        | -                         | -                          | -                      |
| B-492        | Polyester                                 | -                    | -                    | -                    | ●                    | -                    | -                     | -                         | -                       | -                        | -                        | -                         | -                          | -                      |
| B-498        | Cloth                                     | -                    | -                    | ●                    | -                    | -                    | -                     | -                         | -                       | -                        | -                        | -                         | -                          | -                      |
| B-499        | Nylon                                     | ●                    | ●                    | -                    | -                    | -                    | -                     | -                         | -                       | -                        | -                        | -                         | -                          | -                      |
| B-509        | Printable Magnetic                        | -                    | -                    | -                    | -                    | -                    | ●                     | -                         | -                       | -                        | -                        | -                         | -                          | ●**                    |
| B-526        | Photoluminescent Polyester                | -                    | -                    | -                    | -                    | -                    | ●                     | -                         | -                       | -                        | -                        | -                         | -                          | ●**                    |
| B-549        | Cold Temperature Polyester                | -                    | -                    | -                    | -                    | -                    | ●                     | -                         | -                       | -                        | ●                        | -                         | -                          | ●**                    |
| B-551        | Non-Adhesive Tag                          | -                    | -                    | -                    | -                    | -                    | ●                     | -                         | -                       | -                        | -                        | -                         | -                          | ●**                    |
| B-565        | Metallized Polyester                      | -                    | -                    | -                    | -                    | -                    | ●                     | -                         | -                       | -                        | -                        | -                         | -                          | -                      |
| B-569        | Low-Halide Polyester                      | -                    | -                    | -                    | -                    | -                    | ●                     | -                         | -                       | -                        | ●                        | -                         | -                          | ●**                    |
| B-581        | Repositionable Vinyl                      | -                    | -                    | -                    | -                    | -                    | ●                     | -                         | -                       | -                        | ●                        | -                         | -                          | ●**                    |
| B-584        | Retro Reflective                          | -                    | -                    | -                    | -                    | -                    | ●                     | -                         | -                       | -                        | -                        | -                         | -                          | ●**                    |
| B-593        | Raised Panel                              | -                    | ●                    | -                    | -                    | -                    | -                     | -                         | ●                       | -                        | -                        | -                         | -                          | -                      |
| B-595        | Outdoor Vinyl                             | -                    | -                    | -                    | -                    | -                    | ●                     | -                         | -                       | -                        | ●                        | ●***                      | ●***                       | ●**                    |
| B-717        | Polyimide                                 | -                    | ●                    | -                    | -                    | -                    | -                     | -                         | -                       | -                        | -                        | -                         | -                          | -                      |
| B-718        | Polyimide                                 | -                    | ●                    | -                    | -                    | -                    | -                     | -                         | -                       | -                        | -                        | -                         | -                          | -                      |
| B-719        | Polyimide                                 | -                    | ●                    | -                    | -                    | -                    | -                     | -                         | -                       | -                        | -                        | -                         | -                          | -                      |
| B-724        | Matte Amber Polyimide                     | ●                    | -                    | -                    | -                    | -                    | -                     | -                         | -                       | -                        | -                        | -                         | -                          | -                      |
| B-727        | Glossy White Polyimide                    | -                    | ●                    | -                    | -                    | -                    | -                     | -                         | -                       | -                        | -                        | -                         | -                          | -                      |
| B-854        | ToughWash® Metal Detectable               | -                    | ●                    | -                    | -                    | -                    | -                     | -                         | -                       | -                        | -                        | -                         | -                          | -                      |
| B-855        | ToughWash                                 | -                    | ●                    | -                    | -                    | -                    | -                     | -                         | -                       | -                        | -                        | -                         | -                          | -                      |
| B-7425       | Polypropylene                             | -                    | -                    | -                    | ●                    | -                    | -                     | -                         | -                       | -                        | -                        | -                         | -                          | -                      |
| B-7425-AC    | Polypropylene                             | -                    | -                    | -                    | ●                    | -                    | -                     | -                         | -                       | -                        | -                        | -                         | -                          | -                      |
| B-7569       | Vinyl Film                                | -                    | -                    | -                    | -                    | -                    | ●                     | -                         | -                       | -                        | -                        | -                         | -                          | -                      |
| B-7641       | Polyolefin                                | ●                    | ●                    | -                    | -                    | ●                    | -                     | -                         | -                       | -                        | -                        | -                         | -                          | -                      |
| B-7642       | Polyolefin                                | ●                    | -                    | -                    | ●                    | -                    | -                     | -                         | -                       | -                        | -                        | -                         | -                          | -                      |
| B-7643       | Polyurethane                              | -                    | ●                    | -                    | -                    | -                    | -                     | ●                         | -                       | -                        | -                        | -                         | -                          | -                      |

Refer to the corresponding B-number Tech Data Sheet for complete material information at [BradyID.com/techdata](http://BradyID.com/techdata).

\* B30-R4500-SV ribbon for use with B-342 black sleeves only; B30-R6700-WT ribbon for use with B-345 black sleeves only.

\*\* Colored ribbons optimized for use on white material. Test use on other material colors for suitability to your application.

\*\*\* Use B30-R10000-YL for printing yellow onto white. Use B30-R10000-YL2 for printing yellow onto other colors of B-595.



# Software for easier label creation

Innovation is at the core of our business. And software is no exception. Our intuitive software options make label creation even easier and more efficient. When you pair the BradyPrinter i3300 Industrial Label Printer with these software options, you get automatic label setup and guidance through the label creation process to minimize errors and make label creation a snap.



## Brady Workstation Label Creation Software

Brady Workstation revolutionizes label and sign creation and printing by offering a variety of suites and apps that are easy and efficient to use. Choose and customize the tools you use to complete tasks exactly as you want without having to use print drivers. Try these software options:



**Product and Wire Identification Suite** – When you need to create product labels, wire and cable markers, and panel labels this suite is your go-to solution. It allows you to create basic text labels or labels with graphics and custom formatting and serialize and import data.



**Scan and Print Suite** – This suite allows you to consume data from a barcode scanner, keyboard or custom script to quickly populate your own custom label templates as part of a labeling workflow. Whether you need to replicate labels for lab specimens, re-label supplied parts for product assembly or label products based off work orders, this software suite can solve your workflow needs.



**Laboratory Identification Suite** – Ensure labels for all your lab samples and equipment are crisp, clear and contain all necessary information. Easily design and create labels for your cryovials, centrifuge tubes and bottles, conicals, slides and other samples in your laboratory.



**Safety and Facility Identification Suite** – Keep your facility safe and compliant with the Safety and Facility Identification Suite. This group of apps makes it easy to create custom signs, labels, pipemarkers, Lean / 5S labels and outdoor-grade facility labels. Choose this suite to add visual safety guidance to your facility.



**GHS Labels App** – Creating GHS labels is now surprisingly simple. We've streamlined the process so you can easily enter the data once from your SDS sheets, then create and print any size GHS label at any time. You can also auto-populate your GHS label using the built-in chemical database. Need labels with multiple languages? Those are also supported in the app.

### Other apps and suites are available:



1. Go to [Workstation.BradyID.com](http://Workstation.BradyID.com).



2. Fill the workstation with the apps and suites you want and leave out the ones you don't.

For more information on Brady Workstation apps and suites, go to [Workstation.BradyID.com](http://Workstation.BradyID.com).

# Printer specifications

|   |  |
|---|--|
| <b>Model(s):</b>                              |  |
| Model name                                    | i3300 Industrial Label Printer   |
| Media alignment                               | Center justified   |
| <b>User Interface:</b>                        |  |
| Display type                                  | Touchscreen color LCD  |
| Display size (diagonal)                       | 3.5 in. (88.90 mm)   |
| Display resolution (h x w)                    | 240 x 320 pixels   |
| Display languages                             | Bulgarian, Chinese (simplified), Chinese (traditional), Croatian, Czech, Danish, Dutch, English, Estonian, Finnish, French (Canadian), French, German, Hungarian, Italian, Korean, Norwegian, Polish, Portuguese (Brazilian), Portuguese (Iberian), Romanian, Russian, Slovakian, Slovenian, Spanish (Iberian), Spanish (Latin America), Swedish, Thai, Turkish  |
| Display status bar                            | Ribbon and label part number installed, amount of supplies remaining, Wi-Fi connection, Ethernet connection, receiving data icon, ready state/error state  |
| <b>Print Head / Printing Characteristics:</b> |  |
| Print resolution                              | 300 dpi  |
| Print method                                  | Thermal transfer   |
| Print color capability                        | Single print color   |
| Print speed                                   | Up to 4 in./sec. (101.60 mm/sec.)  |
| Print width (max, cross-web)                  | 4.015 in. (101.98 mm)  |
| Print length (max, down-web)                  | 5.0 ft. (1.52 m)   |
| Media cut-off                                 | Auto cutter built in (all models)  |
| <b>Media Characteristics:</b>                 |  |
| Intelligent printing capability               | Yes - reads datachip on supplies for no waste printing and auto label setup in software  |
| Media loading/handling                        | Labels: In cartridge, drops into place, 15 sec. changeover<br>Ribbon: In cartridge, snaps into place, 5 sec. changeover  |
| Media width (cross-web incl liner)            | 0.71 in. to 4.25 in. (18.03 mm to 107.95 mm)   |
| Label width (cross-web)                       | 0.25 in. to 4.25 in. (6.35 mm to 107.95 mm) continuous liner-less media<br>0.25 in. to 4.015 in. (6.35 mm to 101.98 mm) other media  |
| Label length (down-web)                       | 0.25 in. (6.35 mm) min. die cut media<br>0.50 in. (12.7 mm) min. continuous media  |
| Media thickness**                             | 0.0024 in. to 0.031 in. max (0.061 mm to 0.787 mm) label media<br>0.070 in. max (1.778 mm) B-593 push button media<br>0.043 in. max (1.092 mm) heat shrink sleeves   |
| Media roll o.d. (max)                         | 4.30 in. (109.22 mm) when specifying a custom part   |
| Media roll core i.d.                          | n/a (media integrated in cartridge roll)   |
| Media roll winding                            | n/a (media integrated in cartridge roll)   |
| Media styles                                  | All media are on an integrated cartridge roll with part data on smart cell. Die cut media, continuous media, tagstock liner-mounted, tagstock linerless, perforated materials, adhesive labels, heat-shrink sleeves size 094 and larger (single and double-sided with 2-pass print), self-laminating cable labels, zip-tie cable tags, raised panel push button labels, rapido-style cable tags, Permashield style labels, pre-printed GHS labels, safety and facility identification outdoor grade labels   |
| Media material types                          | PE (polyethylene), PET (polyester), PET Metallized, PU (polyurethane), PVC (vinyl), PVF (polyvinyl fluoride), PVDf (polyvinylidene fluoride), PP (polypropylene), PI (polyimide), Polyamide, Polyether Polyurethane (Heatex™), Raised Panel Push Button material, Paper, Destructible materials, Tamper-Evident and Tamper-Resistant materials, 8-10 year Outdoor Vinyl, 10-hour Glow-in-the-Dark material, Retroreflective labels, Printable Floor Marking Tape, Nylon and Vinyl cloth, Wash-Down materials, Extreme Temperature Laboratory materials, labels for lab staining (slides), other materials not listed |
| Media parts offering                          | 800+ stock parts and custom (made-to-spec) parts   |
| <b>Ribbon Characteristics:</b>                |  |
| Ribbon length (max)                           | 200 ft. (60.96 m)  |
| Ribbon roll o.d. (max)                        | n/a (ribbon integrated in cartridge)   |
| Ribbon roll core i.d.                         | n/a (ribbon integrated in cartridge)   |
| Ribbon width (cross-web)***                   | 4.33 in. (109.98 mm)   |
| Ink side                                      | n/a (ribbon integrated in cartridge — guaranteed correct orientation to print head)  |

|  |   |
|--|---|
| <b>Electronics:</b>                            |   |
| Processor                                      | 32 bit 800 MHz clock rate   |
| Memory (RAM)                                   | 512 MB  |
| Data storage (IFFS)                            | 195 MB  |
| SD card slot (SDHC, SDXC)                      | n/a   |
| Internal battery                               | For internal date and time (RTC)  |
| Data storage when power off                    | Yes   |
| <b>Physical / Operational Characteristics:</b> |   |
| Dimensions (closed) (h x w x d)                | 9.5 in. x 9.0 in. x 12.0 in. (241.30 mm x 228.60 mm x 304.80 mm)  |
| Weight (empty)                                 | 11.5 lbs  |
| Power supply                                   | 101 to 240V AC, 50/60 Hz  |
| Power consumption                              | <10W standby / 70W operating / 480W max   |
| Operating environment                          | 50 to 104° F (10 to 40° C) / 10 - 85% RH non condensing   |
| Storage environment                            | -4 to 122° F (-20 to 50° C) / 15 - 90% RH non condensing  |
| Transport environment                          | -4 to 122° F (-20 to 50° C) / 15 - 90% RH non condensing  |
| Agency approvals                               | CE, FCC class A, cUL. Contact Brady for up-to-date list of environmental compliance information and agency approvals and/or marks covering over 75 countries (awarded or applied for) |
| <b>Fonts and Graphics:</b>                     |   |
| Font types (resident)                          | Arial, Courier New, Times New Roman, Trebuchet MS, Verdana, Tahoma  |
| Font types (storable to printer)               | TrueType fonts storable to printer via jump drive   |
| Font attributes                                | Bold, italic, underlined  |
| Character sets                                 | ASCII character set   |
| Graphic elements                               | Arrow, line, rectangle, square, circle, ellipse, diamond, dot, star, triangle, seal, and cross  |
| Graphic formats                                | BMP, GIF, JPEG, PNG   |
| <b>Barcodes:</b>                               |   |
| Barcode symbologies - linear                   | Code 39, Code 93, Code 128 A, B, C, EAN-8, EAN-13, EAN/JAN 13, JAN-8, JAN-13, HIBC, Interleaved 2 of 5, Interleaved 2 of 5 w check digit, UPC A, Aztec, QR Code, datamatrix           |
| Barcode symbologies - 2D                       | Aztec, QR Code, pdf 417   |
| Barcode attributes                             | Sizing: variable in height and ratio<br>Rotation: 0°, 90°, 180°, 270°<br>human-readable and human-readable location density   |
| <b>Interfaces and Connectivity:</b>            |   |
| USB 2.0 hi-speed device port                   | For PC connect  |
| 2 x USB host (back panel)                      | For scanner, keyboard, USB memory stick   |
| 1 x Ethernet 100 BASE-T                        | For networking  |
| Wireless                                       | Factory installed Wi-Fi 802.11b/g/n (wireless printer model only)   |
| <b>Software and Firmware:</b>                  |   |
| Label creation software                        | Brady Workstation (v4.4 or newer) & Workstation apps  |
| WHQL certified Windows® drivers****            | Windows 7, 8, 8.1, 10, Server 2008, 2008 R2, 2012, 2012 R2, 2017  |
| Printer command language                       | BPL - scripting commands for sending scripts to the printer   |
| <b>Options / Accessories:</b>                  |   |
| Replacement print heads                        | Factory replaceable via Brady tech repair   |
| Replacement print rollers***                   | 4.53 in. (115 mm) width, factory replaceable via Brady tech repair if worn  |
| Auto cutter                                    | Built-in auto cutter (on all models)  |

\*\* User should test the media with the application. Print performance on small labels or a part that is below the minimum label dimension spec. is dependent on multiple factors, including print speed, quantity in print run, heat setting and the size/layout of the printed elements.

\*\*\* Use narrow print roller with narrow media, but to avoid head damage, ALWAYS be sure roller is wider than total media width, and ribbon is wider than the roller width.

\*\*\*\* Windows® is a registered trademark of Microsoft Corporation.

## We identify and protect premises, products and people.

For more information or to learn more about our innovative products, visit [BradyID.com](http://BradyID.com) or call 1-888-272-3946.



Y4698871 MS4698871

USA  
Customer Service: 1-888-272-3946  
Inside Sales: 1-888-311-0775  
[BradyID.com](http://BradyID.com)

Canada  
Customer Service: 1-800-263-6179  
[BradyCanada.ca](http://BradyCanada.ca)

Mexico  
Customer Service: 1-800-262-7777  
Inside Sales: 1-800-262-7777 ext 177  
[BradyLatinAmerica.com](http://BradyLatinAmerica.com)

